


AD-A221 955

AWS/TR-80/003
REVISED



CALCULATING TOXIC CORRIDORS

by

Capt Jon P. Kahler
AWS/DNXP
Lt Col Robert G. Curry
AFGWC/DOP
Maj Raymond A. Kandler
DET 24, 26WS

NOVEMBER 1980
(Revised April 1989)

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.


AIR WEATHER SERVICE (MAC)
Scott Air Force Base, Illinois, 62225-5008

90 05 24 08 6

REVIEW AND APPROVAL STATEMENT


AWS/TR-80/003, Calculating Toxic Corridors, November 1980, is approved for public release. There is no objection to unlimited distribution of this document to the public at large, or by the Defense Technical Information Center (DTIC) to the National Technical Information Service (NTIS).

This technical publication has been reviewed and is approved for publication.



KENNETH E. GERMAN, Col, USAF
Assistant DCS/Aerospace Sciences
Reviewing Officer

FOR THE COMMANDER

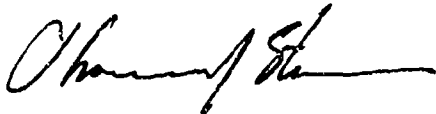

THOMAS A. STUDER, Col, USAF
DCS/Aerospace Sciences

21 JAN 1991

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AWS/TR-80/003	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Calculating Toxic Corridors		5. TYPE OF REPORT & PERIOD COVERED Technical Report
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Jon P. Kahler, Capt, USAF; Robert G. Curry, Lt Col, USAF; Raymond A. Kandler, Maj, USAF		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Headquarters Air Weather Service (MAC) Scott AFB, IL 62225		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Headquarters Air Weather Service (MAC) Scott AFB, IL 62225		12. REPORT DATE November 1980
		13. NUMBER OF PAGES 97
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Revised in April 1989 to provide new Tables 2(Aerozin), 16(Hydrazine), 22(Monomethyl Hydrazine), 23(Nitrogen Dioxide), 24(Nitrogen Tetroxide), and 32(Unsymmetrical Dimethyl Hydrazine)		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)		
Toxic Chemicals: Diffusion Dispersion, Air Pollution Toxic Corridors:	Hazard Corridors Evacuation Areas Disaster Preparedness Emergency Actions Missile Propellants:	Spills of Toxic Chemicals Safety Meteorology Toxic Hazards:
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Method for defining evacuation areas for accidental spills of toxic chemicals are presented. These spills can present serious health hazards to people exposed to excessive vapor concentrations downwind of the accident. An empirical diffusion equation is used to calculate the downwind hazard distance. The width of the toxic corridor, specified in angular degrees centered along the mean wind direction, is based upon the variability of the wind direction. Flexibility in estimating toxic corridor evacuation areas is allowed through a choice of four different methods involving the use of tables, nomograms, and		

DD FORM 1 JAN 73 1473

iii

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

Block 20

a programmable calculator. Appendices present worksheets, example problems, procedures for determining meteorological inputs, a procedure for determining evaporative source strength, and other items. *Refer to page 10-10*

PREFACE

The Air Weather Service (AWS) is tasked by AFR 355-1, 14 May 1979, (para 2-12g) to provide diffusion predictions for toxic chemicals released to the atmosphere. This technical report presents several forms of a simple technique for use by AWS detachment forecasters for determining toxic corridors in the event of an accidental spill or release to the atmosphere of a toxic chemical. These techniques are largely based upon AWS Pamphlet 105-57, "Calculation of Toxic Corridors," (which has been rescinded), AWSTR 176, "Diffusion Forecasting for TITAN II Operations," and AFGL Report, "The Ocean Breeze and Dry Gulch Diffusion Program, Volume II." Additional information can be found in AWSTR 214, "Guide to Local Diffusion of Air Pollutants". These references and others pertaining to the Ocean Breeze and Dry Gulch programs and toxic corridor forecasting are listed in the references.

The basic technique of using toxic corridor tables calculated from the Ocean Breeze and Dry Gulch equation has been in use for nearly two decades by weather units supporting TITAN missile operations. During that period slight modifications and refinements to the procedures have been made but the basis for the technique has remained the same. This technical report continues the use of the above equation to determine toxic corridor lengths and contains additional, alternative approaches for arriving at the same answer. This additional flexibility should allow AWS forecasters the opportunity to select the means of making these calculations that is best suited to their particular situation.

The authors of this report wish to acknowledge the contributions made by several individuals in their review of this technical report. Maj William Normington from the USAF Occupational and Environmental Health Laboratory provided a general technical review. Col Victor C. Furtado, Chief of Bioenvironmental Engineering, Aerospace Consultants Division, Office of the Surgeon General, reviewed several sections of the report and confirmed many of the exposure limits listed in the table of chemical factors. Air Weather Service Mobilization Augmentee Lt Col James Dicke provided an extremely detailed and comprehensive editorial and technical review of the entire report. The authors sincerely appreciate the contributions provided by all of the above individuals.

NOTE: THE APRIL 1989 REVISION PROVIDED REPLACEMENTS FOR THE FOLLOWING PAGES: 10, 24, 30, 31, 32, 40.

BIOS
COPY
INSPECTION

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	

A-1	

TABLE OF CONTENTS

	Page
Chapter 1	INTRODUCTION. 1
Chapter 2	SUGGESTIONS AND CAUTIONS IN CALCULATING TOXIC CORRIDORS 2
	Lack of Tables for a Particular Toxic Chemical. 2
	Wind Direction Variability. 2
	Types of Corridors. 2
	A Propellant Emission Corridor. 2
	A Potential Hazard Corridor 2
	An Operational Hazard Corridor. 2
	The Time Factor 3
	Potential Sources of Error. 3
Chapter 3	CALCULATING TOXIC CORRIDORS 5
	Further Considerations. 5
Chapter 4	METHOD 1: TOXIC CORRIDOR LENGTH TABLES 7
Chapter 5	METHOD 2: CHEMICAL AND DIFFUSION FACTORS 41
Chapter 6	METHOD 3: UNIVERSAL NOMOGRAM 49
Chapter 7	METHOD 4: PROGRAMMABLE CALCULATOR. 55
	TI-59 User Instructions 56
Chapter 8	SUMMARY 61
REFERENCES.	63
Appendix A	TOXIC CORRIDOR WORKSHEET. 65
Appendix B	PROCEDURES FOR DETERMINING METEOROLOGICAL ELEMENTS. 67
Appendix C	TOXIC CHEMICAL SOURCE STRENGTH DETERMINATION. 72
Appendix D	TOXIC CORRIDOR LENGTH AS A FUNCTION OF TEMPERATURE DIFFERENCE ERROR 75
Appendix E	EXAMPLE TOXIC CORRIDOR PROBLEMS 77
Appendix F	SPECIAL TOXIC CORRIDOR TABLES FOR TITAN II SITES. 79
Appendix G	TABLE OF THE ELEMENTS 88
GLOSSARY OF TERMS, ABBREVIATIONS, AND SYMBOLS	91

METHOD 1

METHOD 2

METHOD 3

METHOD 4

LIST OF ILLUSTRATIONS

Figure 1	Flow Chart for Method 1 9
Figure 2	Flow Chart for Method 2 44
Figure 3	Nomogram for Determining Chemical Factors 47
Figure 4	Nomogram for Determining Diffusion Factors. 48
Figure 5	Flow Chart for Method 3 51
Figure 6	Toxic Corridor Length Calculation Nomogram. 53
Figure 7	Flow Chart for Method 4 60
Figure A-1	Toxic Corridor Forecast Worksheet with Example Calculations 65
Figure A-2	Toxic Corridor Forecast Worksheet 66
Figure B-1	Sample Traces of Temperature Difference 68
Figure B-2	Sample Traces of Wind Direction and Speed 69
Figure C-1	Toxic Corridor Length Errors Resulting from Source Strength Estimation. 73
Figure D-1	Toxic Corridor Length Errors, Expressed in Percent, as Function of Temperature Difference Errors. 76

LIST OF TABLES

Table 1	Length Conversion Factors	5
Table 2	Aerozine 50 TCL	10
Table 3	Anhydrous Ammonia TCL	11
Table 4	Aniline TCL	12
Table 5	Bromine Pentafluoride TCL	13
Table 6	Carbon Disulfide TCL	14
Table 7	Carbon Monoxide TCL	15
Table 8	Chlorine TCL	16
Table 9	Chlorine Pentafluoride TCL	17
Table 10	Chlorine Trifluoride TCL	18
Table 11	Diborane TCL	19
Table 12	Ethylene Oxide TCL	20
Table 13	Flourine TCL	21
Table 14	FLOX TCL	22
Table 15	Fuming Nitric Acid TCL	23
Table 16	Hydrazine TCL	24
Table 17	Hydrogen Chloride TCL	25
Table 18	Hydrogen Fluoride TCL	26
Table 19	Hydrogen Sulfide TCL	27
Table 20	MAF 1, 3, and 4 TCL	28
Table 21	Methylene Chloride TCL	29
Table 22	Monomethylhydrazine TCL	30
Table 23	Nitrogen Dioxide TCL	31
Table 24	Nitrogen Tetroxide TCL	32
Table 25	Oxygen Difluoride TCL	33
Table 26	Perchloroethylene TCL	34
Table 27	Perchloryl Fluoride TCL	35
Table 28	Pentaborane TCL	36
Table 29	Sulfur Dioxide TCL	37
Table 30	Trichloroethylene TCL	38
Table 31	Trichlorotrifluoroethane TCL	39
Table 32	Unsymmetrical Dimethylhydrazine	40
Table 33	Chemical Factors	45
Table 34	Diffusion Factors	46
Table 35	Probability Factors	54
Table 36	Summary of Four Toxic Corridor Methods	62
Table B-1	Estimation of Temperature Difference, °F.	71
Table C-1	Source Strength, GMW, and Vapor Pressures for Selected Toxic Chemicals	74
Table F-1	Hydrazine (TITAN - Emergencies)	80
Table F-2	Nitrogen Tetroxide (TITAN - Operational)	82
Table F-3	Nitrogen Tetroxide (TITAN - Emergencies)	83
Table F-4	Unsymmetrical Dimethylhydrazine TCL (TITAN - Operational)	85
Table F-5	Unsymmetrical Dimethylhydrazine TCL (TITAN - Emergencies)	86

Chapter 1

INTRODUCTION

The duty forecaster answers the telephone and receives the following message: "A tank truck carrying liquid chlorine jack-knifed near the main gate. The tank ruptured and is spewing chlorine all over. A large chlorine gas cloud is moving across the base toward the housing area. We need to know what areas should be evacuated."

At this point, the duty forecaster must realize that a toxic corridor is required and must know how to prepare one. A large number of lives may depend upon this forecaster's response.

The potential for this type of accident exists virtually everywhere. It is not necessary that toxic chemicals routinely be moved, used, or stored on your installation. Any installation located near highways or railroads is a potential candidate for a toxic spill from trucks or trains that transport chemicals along these routes. The call for a toxic corridor forecast will likely come when least expected. Will you be ready to respond rapidly and accurately to such a request?

This report outlines specific procedures to swiftly provide toxic corridor information based upon atmospheric diffusion considerations at the time of an emergency. Several different approaches to calculating toxic corridors are presented. These techniques are based upon the observed and forecast wind, temperature difference between 54 feet and 6 feet (ΔT), and information pertaining to the toxic chemical that has been spilled or released to the atmosphere.

Toxic corridors represent emergency evacuation areas downwind of accidental spills of toxic chemicals. These spills can occur anywhere toxic chemicals are handled or transported such as missile sites, chemical storage areas, or along rail, water, and highway shipping routes. Specifically, a toxic corridor is the area within which the risk to people from excessive vapor concentrations exceeds an acceptable level.

Assuming correct input parameters are used, the toxic corridor calculated using the techniques presented in this report will result in an area within which the probability is 90 percent that concentrations above a specified limit will be contained. In many cases, this specified concentration will be an estimated or established Short-Term Public Emergency Limit (SPEL). The National Academy of Sciences Committee of Toxicology (1979) has established exposure limits for a large number of toxic chemicals.

The boundary of a toxic corridor does not represent a clearly defined line where one side represents a hazard and the other side complete safety. Remember, a 10-percent probability exists that an exposure limit can be exceeded outside of the specified corridor.

A toxic corridor calculated using this report represents a quick response approach to an emergency situation that should minimize the risks while not requiring excessive areas to be evacuated. The calculation procedures are simple, rapid, and suited to emergency situations.

SUGGESTIONS AND CAUTIONS IN CALCULATING TOXIC CORRIDORS

Lack of Tables for a Particular Toxic Chemical

Occasionally, a corridor table not included in this report may be required for use with Method 1. If assistance in obtaining this information is required, submit a request through channels to Headquarters Air Weather Service, DCS Aerospace Sciences.

If you wish to pursue the problem yourself, ask your local Bioenvironmental Engineer (BEE) for help. First determine the appropriate exposure limit. Normally, this will be the 30-minute Short-Term Public Emergency Limit (SPEL). Unfortunately, SPEL's have not been established for many toxic chemicals. A gram molecular weight for the toxic chemical is also needed. If a SPEL has not been established, work out an acceptable exposure limit for the toxic chemical with the BEE. It is not the intent of this report to provide a procedure for determining an exposure limit. Once an exposure limit and a gram molecular weight has been established, Method 2, 3, or 4 can be used to determine a toxic corridor. If you prefer, produce a toxic corridor table and use Method 1. Plan ahead for any credible emergency. Obviously, it would be impractical to begin developing new tables during an emergency.

Wind Direction Variability (R)

Instructions for determining wind direction variability, which is directly related to the lateral diffusion of the toxic chemical, are provided in the steps for calculating toxic corridors by each method. At locations where direct readouts of wind direction standard deviations (σ_θ) are available, wind direction variability (R) is approximately equal to $(16/3) \sigma_\theta$. This makes the corridor width (W), which is $1.5R$, equal to $8 \sigma_\theta$, i.e., $(3/2) \cdot (16/3) \sigma_\theta = 8 \sigma_\theta$ (Taylor, 1963).

Types of Corridors

Organizations that operate TITAN II sites are prime users of toxic corridor forecasts by Air Weather Service units. Strategic Air Command (SAC) Bioenvironmental personnel have worked closely with the 3rd Weather Wing Staff in carefully planning the use of these toxic corridor diffusion forecasts. SACR 355-5 defines different types of corridors based upon operational requirements. The definitions below are examples of the ways these diffusion forecasts are used.

a. A Propellant Emission Corridor is established when planned emission of propellants are to occur, e.g., tank venting or purging operations. The exposure limit used for calculating this type of toxic corridor is the 10-minute Short-Term Public Limit (STPL). Since this is a scheduled occurrence, a decision must be made as to whether the planned task can be performed without unacceptable exposures to the general public.

b. A Potential Hazard Corridor is established when no release of propellants to the environment is planned, but propellants will be in a nonstatic, e.g., propellant transfer, mode. The 10-, 30-, and 60-minute Short-Term Public Emergency Limits (SPEL) are used as exposure limits for calculating these toxic corridors.

c. An Operational Hazard Corridor is established and periodically updated if an actual propellant spill or mishap occurs. Immediate steps must be taken to evacuate unprotected personnel from the established potential hazard corridor until the exact size of the operational hazard corridor is established. The 10-, 30-, and 60-minute Short-Term Public Emergency Limits (SPEL) are used as the exposure limits for calculating these toxic corridors. Note: The primary difference between potential and operational hazard corridors is that the former is calculated in anticipation of a potential spill and the latter after a spill has occurred.

The Time Factor

A major consideration during emergencies created by accidental spills of toxic chemicals is the reaction time required to evacuate people from the hazardous area. Plans for emergency evacuation should be established so that evacuation is started without delay. Therefore, evacuation might have started before a toxic corridor calculation can be made. The following steps outline one possible sequence of events.

a. As soon as a toxic spill occurs, the Disaster Response Force (DRF) clears an area of a predetermined radius around the spill site. Base Weather is notified and provides wind information (direction and speed) representative of the spill location at that time. In some instances, e.g., at TITAN missile sites, wind and temperature difference information normally will be provided to Base Weather from the site of the spill.

b. The DRF begins evacuating areas downwind of the site staying as far ahead of the leading edge of the toxic cloud as possible. The leading edge, even if visible, may not be the toxic edge of the cloud.

c. Base Weather completes toxic corridor forecast calculations and relays the information to the DRF which completes the evacuation of the toxic corridor.

d. Base Weather continues close monitoring of weather conditions, updates the toxic corridor forecast as necessary, and relays any significant changes to the DRF.

Potential Sources of Error

Several potential sources of error might contribute to an erroneous estimate of toxic corridors. Errors can occur when measuring or estimating the temperature difference (ΔT) and when estimating source strength and trends in meteorological parameters. Other errors may stem from peculiarities of the toxic chemical, terrain effects that alter the wind and diffusion characteristics of the atmosphere, and the horizontal homogeneity assumption. Each of these potential error sources are briefly discussed in this section.

Toxic corridor lengths are extremely sensitive to the ΔT values used in making the calculations. For example, a 1 $^{\circ}$ F error in ΔT can result in an error as large as 40 percent in the corridor length. Appendix D provides additional information on this error.

Source strength errors are not as critical as ΔT errors; however, source strength is much more difficult to estimate than ΔT . Corridor lengths are approximately proportional to the square root of the source strength. Appendix C contains information on this error.

Past experience and research have shown that gases such as chlorine which are considerably denser than air do not initially disperse in the same way as gases with densities nearly the same as air. When a large amount of dense gas is released at one time, the spill will form a density front and initially spread in all directions at once. This can result in a situation where the upwind edge of a highly concentrated gas cloud travels against the wind and spreads upwind of the spill site. Whether or not the upwind edge of a dense gas cloud travels against the wind depends upon whether or not the velocity of the density front is greater than the wind velocity. The density front also causes the initial lateral spread of the cloud to be larger than normal. Vertical spread of the gas will be initially much less than normal and the gas cloud will tend to hug the ground, especially if there is no added buoyancy due to heating/combustion. The cloud will flow downhill and tend to follow terrain features such as rivers and valleys and, again, may somewhat "ignore" the direction of the wind. After the gas cloud has traveled a sufficient distance and entrained enough air, its density will be similar to that of air allowing it to diffuse in a more classical Gaussian manner (van Ulden, 1974 and Eidsvik, 1978).

The dense gas effect may cause toxic corridors to be longer than calculated, particularly when the ΔT is negative. Preliminary results of comparisons between a dense gas model and the Ocean Breeze and Dry Gulch model indicate that the differences between calculated corridor lengths tend to disappear under extremely stable (large, positive ΔT) atmospheric conditions. Research into the dense gas problem is on-going and should result in more definitive guidance in the future.

Terrain and surface roughness elements can affect not only the atmospheric dispersion but also the wind direction and speed. The procedure for estimating delta-T (Table B-1) calls for adding -10F to the estimated value if the toxic spill occurs in rough terrain. Atmospheric diffusion can be enhanced by the increase in turbulence caused by flow over rough terrain. Large buildings and terrain features such as hills and bodies of water can alter wind direction downwind of a spill. Since wind speed is used in terms of several categories in Table B-1 and does not appear in the Ocean Breeze and Dry Gulch equation, a precise value is not critical; however, the correct category is as important as the temperature difference (delta-T) value. These effects must be considered when defining a toxic corridor.

Toxic corridor forecasts should be updated when wind direction changes occur or are forecast to occur. These changes may be due to several causes including 1) passage of a front or trough, 2) the onset of drainage winds in mountainous regions and, 3) shore line wind direction reversals over coastal regions.

There are several reasons why the temperature difference values in Table B-1 should be modified when there is a toxic chemical release in or very near forested areas. Empirical data show that chemical plumes/clouds under forest canopies tend to expand to much larger volumes, at shorter travel distances, than those on generally open, relatively level terrain. Field data also show that wind speeds under canopies are much lower than wind speeds measured on open, level terrain at any given time. Thus, chemical plumes/clouds travel much farther in a given time over open, level terrains than they do in forests under any given weather situation. Although Johnson (1980) contains an extensive table of corrections applicable to a computer-based model developed for the Department of Defense (DOD), directly applying the corrections to the methods in this report is neither possible nor warranted. Rather, if a toxic chemical release occurs in a forest or is forecast to flow into a forest immediately after release, the forecaster should use the next lower wind speed category to that normally applicable if the out-of-canopy wind speed exceeds 3 knots. Then, add (-1) to the number in Table B-1 before entering the appropriate toxic corridor length table. This approximation does not justify using a number more negative than (-4) in calculating toxic corridor length, even if the spill is in rough terrain.

Any diffusion estimation technique that uses one set of meteorological parameters as inputs assumes the conditions described by these parameters are horizontally homogeneous; i.e., they do not change in the horizontal. Over relatively flat and uniform terrain this assumption is valid; however, the forecaster must insure that factors affecting the representativeness of the input data for a toxic corridor forecast have been considered.

The important aspect of considering potential sources of error is to know what they are and to watch for them in your particular situation. Remember that the procedures in this report are intended for emergency situations and must, therefore, be kept as simple as possible. Time does not permit, and sufficient meteorological data will not usually be available to run a fine-grid numerical model. Thus, a quick and simple technique, tempered by forecaster judgement, must be used to produce a best estimate of the hazard area.

CALCULATING TOXIC CORRIDORS

The following chapters contain step-by-step instructions for calculating toxic corridors using any of four methods. Since the results of toxic corridor calculations are virtually the same, regardless of the method used, the method of choice will likely depend on frequency of forecast request, experience of the forecaster in making this forecast, availability of a toxic corridor length table for the released chemical, and availability of a TI-59 programmable calculator. Method 1 will most likely be used if there is a toxic corridor length table for the chemical; Method 2 if there is no table. Method 3 requires more independent data and would be applicable for unusual combinations of toxic chemicals and exposure limits. Method 4 may be preferred by those skilled in using programmable calculators where specific situations can be handled by executing the general equations in this report. The separate sections for each method are self-contained except that the suggested worksheet is in Appendix A and procedures for determining meteorological elements are in Appendix B. In all four methods, the technique to determine the corridor is a quick, objective, persistence forecast. The forecaster should be alert to factors that could change the wind direction/variability and speed. Atmospheric stability, as reflected by delta-T, changes from hour to hour during the day. Calculations should be repeated if major variables such as source strength, delta-T, wind speed, wind direction, or wind variability change.

Further Consideration

The toxic area should be evacuated until the DRP determines that the hazard no longer exists. Disaster teams should approach from the upwind side and wear appropriate protective equipment. It is important to realize that the toxic material may diffuse in all directions in light and variable winds. Except for denser than air concentrated gas clouds discussed in the previous section of this report, the material will move downwind at approximately the speed of the wind. For instantaneous releases, a toxic cloud will form, while short-term releases will create a short plume. Once the source is terminated, the end of the plume will diffuse as it moves downwind. Therefore, the toxic corridor is active until the material has time to diffuse to an acceptable concentration.

Be prepared to transfer the worksheet sketch of the corridor to an appropriate map. Insure that the corridor is drawn to map scale. General requirements regarding maps and plotting requirements are contained in AFR 355-1. The local disaster preparedness plan should specify the scale and map to use. Table 1 provides conversion factors that can be used to convert feet to other length units. These factors may help you in making scale drawings.

Table 1. Length Conversion Factors.

Convert From	To	Conversion Factor
Feet	Meters	3.048×10^{-1}
Feet	Kilometers	3.048×10^{-4}
Feet	Statute Miles	1.894×10^{-4}
Feet	Nautical Miles	1.646×10^{-4}

METHOD 1: TOXIC CORRIDOR LENGTH TABLES

The steps to determine the dimensions of a toxic corridor using this method are presented below. Where applicable, preferred and alternate approaches are given. Toxic corridor length Tables 2 through 32 are required. Two copies of a suggested worksheet are provided in Appendix A, one with sample corridor calculations (Figure A-1) and one blank copy (Figure A-2). A flow chart for using Method 1 is depicted in Figure 1.

a. STEP 1: Determine source strength (lb/min).

(1) Preferred. Obtain a source strength from the disaster response force (DRF). NOTE: Although weather personnel are not responsible for determining source strength, a toxic corridor length calculation cannot be made without it. Appendix C provides an equation for calculating evaporative source strengths based on the surface area covered by the toxic chemical spill. Use this appendix to assist the agency responsible for estimating source strengths.

(2) Alternate. For small amounts of liquid or gas (less than 2000 lb), assume the worst case which is total release of the material in one minute. For large amounts of gas, assume total release over five minutes. For large amounts of liquid, assume a source strength of 2000 lb per minute.

(3) Alternate. For releases of a large amount of material where a source strength cannot be determined from the above procedures, go to alternate procedure in Step 3.

b. STEP 2: Determine temperature difference (ΔT ($^{\circ}F$)).

(1) Preferred. Use the mean ΔT based on at least a 10-minute record from a 54-6 foot ΔT instrument. (Available at TITAN II missile sites. Refer to Appendix B, Figure B-1.) NOTE: 54-6 foot ΔT measurements can be made by using a sling psychrometer at the 54- and 6-foot levels of a radar tower.

(2) Alternate. Use mean surface wind speed category, solar elevation angle, and sky condition to obtain an estimated temperature difference from Table B-1, Appendix B. Refer to the notes in this table concerning rough terrain and forested regions prior to estimating the temperature difference.

c. STEP 3: Determine toxic corridor length (TCL) in feet.

(1) Preferred. Turn to the appropriate toxic chemical corridor length table. Read across from the source strength determined in Step 1 and down from the temperature difference determined in Step 2. The intersected value is the toxic corridor length.

(2) Alternate. For releases of a large amount of material where no source strength is available, use the distance the wind would carry the material in one hour. This is an interim forecast which must be updated when particulars are known.

d. STEP 4: Determine mean wind direction and wind direction variability, R (degrees of azimuth). If the surface wind is equal to or less than 3 knots, go to Step 6.

(1) Preferred. Use the 10-minute recorded wind direction trace and eliminate the two furthest direction fluctuations on each side of the mean. Variability, R, is the difference in degrees between the third largest fluctuation on each side of the mean direction.

(2) Alternate. Note the wind fluctuations indicated by an anemometer dial over a 2-minute period. Variability, R, is the difference in degrees between the largest fluctuation on each side of the mean direction.

(3) Approximate. If wind direction fluctuation information is unavailable, assume R is 60° when the wind speed is between 4 and 10 knots; assume R is 30° when the wind speed is greater than 10 knots.

e. STEP 5: Determine corridor width (W) in degrees by multiplying the value obtained for R in Step 4 by 1.5.

f. STEP 6: Plot the toxic corridor.

(1) Wind speed greater than 3 knots. Draw the corridor center line from the source to the point on the wind direction circle corresponding to the direction the mean wind is blowing towards (i.e., 180 degrees from the recorded mean wind direction), as determined in Step 4. Place W/2, calculated in Step 5, on each side of the center line. Draw the lines which define each side of the corridor. See example worksheet, Figure A-1 in Appendix A.

(2) Wind speed equal to or less than 3 knots. The corridor is a circle of radius equal to the corridor length determined in Step 3.

g. STEP 7: Trend forecast. If significant changes in wind direction are expected within the next hour or two, include this information in the briefing. A change in direction that would affect evacuation is significant. Based on continued, close monitoring of weather conditions, relay any significant changes in the toxic corridor forecast to the DRF. Consider changes in winds that have occurred between the time of the spill and the time of the forecast. These changes could alter the shape and size of the toxic corridor.

**TOXIC CORRIDOR CALCULATIONS
USING METHOD 1**

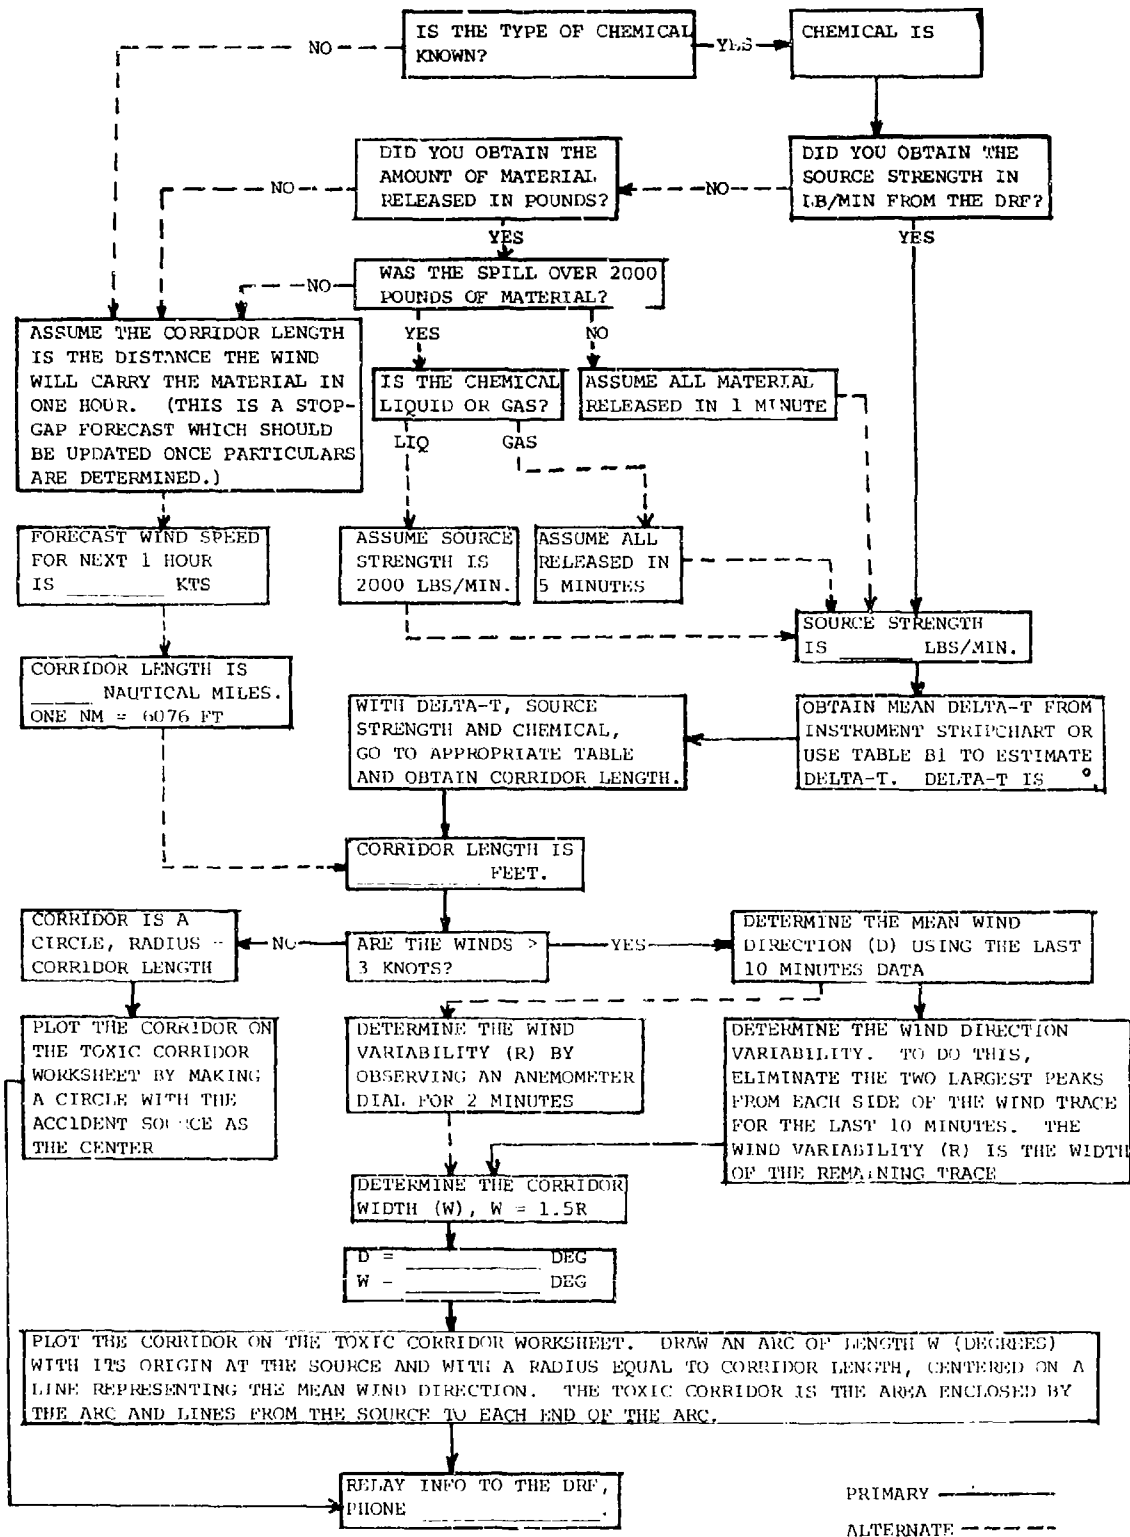


Figure 1. Flow Chart for Method 1. (NOTE: Lt Alan Shaffer of Det 7, 24WS, Mat. r AFB, CA developed the original version of this flow chart. Except for a few minor changes by SWW/DN and the authors of this TN, the flow chart remains as originally developed.)

TABLE 2. HAZARD CORRIDOR LENGTHS IN FEET FOR THE
30-MIN SHORT TERM PUBLIC EMERGENCY LIMIT, .48 PPM

AEROZINE-50 (A-50)
GMV: 4)

SOURCE STRENGTH LBS/MIN	DELTA-T (DEG F)											
	-4	-3	-2	-1	0	1	2	3	4	5	6	7
1.00	615	908	1273	1715	2239	2850	3552	4349	5246	6246	7354	8574
5.00	1804	2074	2907	3917	5113	6508	8110	9931	11978	14263	16793	19576
10.00	2004	2960	4149	5589	7297	9286	11573	14171	17093	20353	23963	27936
15.00	2467	3644	5108	6882	8984	11434	14249	17448	21046	25059	29504	34395
20.00	2859	4223	5921	7976	10412	13252	16515	20222	24393	29045	34196	39865
30.00	3521	5200	7290	9920	12820	16316	20334	24898	30033	35760	42103	49082
40.00	4080	6027	8449	11382	14859	18911	23557	28858	34809	41447	48798	56888
50.00	4575	6758	9474	12762	16661	21204	26426	32357	39030	46474	54717	63787
75.00	5333	8320	11684	15713	20513	26107	32536	39839	48055	57219	67368	78536
100.00	6329	9643	13519	18212	23775	30259	37710	46174	55697	66319	78082	91025
150.00	8039	11873	16845	22423	29273	37255	46429	56851	68575	81653	96135	112072
200.00	9317	13761	19292	25989	33928	43179	53812	65892	79490	94638	111424	129894
300.00	11471	16943	23732	31998	41772	53163	66295	81127	97857	116520	137187	159928
400.00	13296	19637	27530	37086	48415	61618	76791	94028	113419	135050	159003	185361
500.00	14908	22019	30868	41584	54287	69051	86104	105432	127175	151429	178287	207842
750.00	18355	27110	38006	51195	66839	85066	106013	129910	156580	186442	219511	255898
1000.00	21274	31421	44050	59342	77469	98594	122872	150453	181480	216091	254419	296593
2000.00	30358	44839	62860	84681	110349	140695	175341	214699	258975	308365	363059	423243
3000.00	37378	55206	77394	104261	136110	173226	215882	264341	318855	379664	447005	521104
4000.00	43322	63985	89702	120841	157755	200773	250213	306379	369561	440041	518091	603974
5000.00	48576	71746	100581	135497	176888	225123	280560	343537	414382	493410	580926	677225

AEROZINE-50 (A-50)

TABLE 3. ANHYDROUS AMMONIA TGA TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 75 PPM (30-MINUTE SPELL).

SS LB/MIN	DELTA-T (DEG F)													
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.		
1.0	72.	107.	150.	202.	263.	335.	418.	511.	617.	734.	865.	1008.		
5.0	165.	244.	342.	461.	601.	762.	954.	1168.	1408.	1777.	2274.	2902.		
10.0	236.	348.	488.	657.	856.	1092.	1361.	1666.	2010.	2393.	2817.	3284.		
15.0	290.	428.	601.	809.	1056.	1344.	1675.	2051.	2474.	2946.	3469.	4044.		
20.0	336.	497.	696.	938.	1224.	1558.	1942.	2378.	2868.	3415.	4020.	4687.		
30.0	414.	611.	857.	1155.	1507.	1918.	2391.	2927.	3531.	4204.	4950.	5771.		
40.0	480.	709.	993.	1338.	1747.	2223.	2771.	3393.	4092.	4873.	5737.	6688.		
50.0	538.	794.	1114.	1500.	1959.	2493.	3107.	3804.	4589.	5464.	6433.	7499.		
75.0	662.	978.	1371.	1847.	2412.	3069.	3825.	4684.	5650.	6727.	7921.	9233.		
100.0	845.	1296.	1957.	2636.	3442.	4300.	5259.	6284.	7362.	8500.	9703.	11076.		
200.0	1095.	1618.	2268.	3056.	3989.	5077.	6327.	7747.	9345.	11127.	13100.	15272.		
300.0	1349.	1992.	2793.	3762.	4911.	6250.	7790.	9538.	11505.	13695.	16125.	18903.		
400.0	1563.	2305.	3237.	4360.	5692.	7244.	9028.	11055.	13335.	15878.	18654.	21793.		
500.0	1753.	2589.	3625.	4889.	6383.	8123.	10123.	12396.	14952.	17804.	20961.	24436.		
750.0	2158.	3187.	4468.	6020.	7858.	10001.	12464.	15262.	18409.	21920.	25800.	30086.		
1000.0	2501.	3694.	5179.	6977.	9108.	11592.	14446.	17669.	21337.	25406.	29912.	34871.		
2000.0	3569.	5272.	7390.	9956.	12997.	16542.	20615.	25242.	30448.	36255.	42685.	49761.		
3000.0	4395.	6451.	9099.	12258.	16002.	20366.	25381.	31079.	37488.	44637.	52555.	61266.		
4000.0	5093.	7523.	10546.	14207.	18547.	23605.	29418.	36021.	43450.	51736.	60912.	71010.		
5000.0	5711.	8435.	11825.	15931.	20797.	26468.	32986.	40390.	48719.	58011.	68300.	79622.		

TABLE 4. ANILINE TOLUENE TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 20 PPM (1/5 OF 30-MINUTE FEL).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	60.	88.	123.	166.	217.	276.	344.	421.	508.	605.	713.	831.
5.0	136.	201.	282.	379.	495.	630.	786.	962.	1161.	1382.	1627.	1897.
10.0	194.	287.	402.	542.	707.	900.	1121.	1373.	1656.	1972.	2322.	2707.
15.0	239.	353.	495.	667.	870.	1108.	1381.	1690.	2039.	2428.	2859.	3332.
20.0	277.	405.	574.	773.	1009.	1284.	1600.	1959.	2363.	2814.	3313.	3862.
30.0	341.	504.	706.	951.	1242.	1581.	1970.	2412.	2910.	3465.	4075.	4755.
40.0	395.	564.	819.	1103.	1440.	1832.	2283.	2796.	3372.	4016.	4726.	5512.
50.0	443.	655.	918.	1236.	1614.	2054.	2560.	3135.	3781.	4503.	5301.	6180.
75.0	546.	806.	1130.	1522.	1987.	2529.	3152.	3860.	4656.	5544.	6527.	7609.
100.0	779.	1150.	1613.	2172.	2836.	3609.	4498.	5508.	6644.	7911.	9314.	10858.
200.0	903.	1333.	1869.	2518.	3287.	4188.	5214.	6384.	7701.	9165.	10795.	12585.
300.0	1111.	1642.	2301.	3100.	4047.	5151.	6419.	7860.	9481.	11285.	13252.	15495.
400.0	1288.	1873.	2667.	3593.	4691.	5970.	7440.	9110.	10989.	13084.	15405.	17959.
500.0	1444.	2133.	2991.	4029.	5260.	6694.	8342.	10215.	12322.	14671.	17274.	20137.
750.0	1778.	2627.	3682.	4961.	6476.	8242.	10271.	12577.	15170.	18064.	21266.	24793.
1000.0	2061.	3044.	4268.	5749.	7506.	9552.	11905.	14577.	17583.	20936.	24650.	28736.
2000.0	2941.	4344.	6090.	8204.	10711.	13651.	16988.	20801.	25051.	29776.	35176.	41006.
3000.0	3621.	5345.	7498.	10101.	13187.	16763.	20916.	25611.	30893.	36784.	43305.	50488.
4000.0	4197.	6195.	8651.	11708.	15284.	19452.	24242.	29684.	35805.	42634.	50156.	58517.
5000.0	4706.	6951.	9745.	13128.	17138.	21811.	27182.	33284.	40148.	47805.	56244.	65614.

TABLE 5. BROMINE PENTAFLUORIDE TUL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 0.3 PPM (1/5 OF 30-MINUTE EEL).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	372.	545.	770.	1037.	1354.	1723.	2148.	2630.	3172.	3777.	4447.	5184.
5.0	845.	1254.	1758.	2368.	3092.	3925.	4904.	6035.	7243.	8624.	10154.	11837.
10.0	1212.	1750.	2505.	3380.	4412.	5615.	6998.	8569.	10336.	12207.	14450.	16892.
15.0	1492.	2203.	3089.	4161.	5432.	6914.	8616.	10550.	12726.	15153.	17840.	20798.
20.0	1729.	2554.	3580.	4823.	6296.	8013.	9986.	12228.	14750.	17563.	20678.	24105.
30.0	2129.	3144.	4438.	5938.	7752.	9800.	12295.	15055.	18160.	21623.	25455.	29679.
40.0	2467.	3644.	5109.	6862.	8985.	11435.	14251.	17449.	21048.	25062.	29507.	34399.
50.0	2767.	4086.	5728.	7717.	10074.	12822.	15979.	19566.	23601.	28102.	33086.	38570.
75.0	3406.	5031.	7053.	9501.	12404.	15706.	19674.	24090.	29057.	34595.	40736.	47489.
150.0	4861.	7175.	10065.	13559.	17700.	22527.	28074.	34376.	41465.	49273.	58131.	67767.
200.0	5634.	8321.	11665.	15715.	20515.	25110.	32539.	39843.	48060.	57225.	67511.	78544.
300.0	6936.	10245.	14362.	19348.	25259.	32147.	40063.	49055.	59172.	70457.	82954.	96704.
400.0	8039.	11674.	16646.	22425.	29275.	37259.	46434.	56857.	68582.	81661.	96145.	112083.
500.0	9015.	13214.	18665.	25145.	32826.	41778.	52065.	63752.	76899.	91565.	107806.	125677.
750.0	11055.	16353.	22981.	30959.	40416.	51437.	64104.	78493.	94680.	112737.	132733.	154735.
1000.0	12864.	18000.	26636.	35882.	46843.	59617.	74298.	90976.	109737.	130665.	153841.	179343.
2000.0	18357.	27113.	38010.	51205.	66846.	85075.	106024.	129823.	156596.	186461.	219533.	255924.
3000.0	22601.	33382.	46798.	63044.	82302.	104745.	133539.	159841.	192803.	225573.	270253.	315098.
4000.0	26196.	38650.	54240.	73070.	95390.	121403.	151296.	185260.	223464.	266082.	313277.	365208.
5000.0	29373.	43383.	60819.	81932.	108959.	136127.	169648.	207729.	250567.	298353.	351272.	405501.

TABLE 6. CARBON DISULFIDE TOL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 20 PPM (1/5 OF 30-MINUTE EEL).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	66.	68.	137.	184.	241.	306.	382.	467.	564.	671.	750.	921.
5.0	151.	223.	312.	421.	549.	699.	871.	1067.	1287.	1532.	1804.	2103.
10.0	215.	318.	446.	600.	784.	998.	1243.	1522.	1836.	2187.	2574.	3001.
15.0	265.	391.	549.	739.	965.	1228.	1531.	1874.	2261.	2692.	3170.	3695.
20.0	307.	454.	636.	857.	1119.	1424.	1774.	2173.	2621.	3120.	3674.	4283.
30.0	378.	555.	783.	1055.	1377.	1753.	2185.	2675.	3226.	3842.	4523.	5273.
40.0	438.	647.	908.	1223.	1596.	2032.	2532.	3100.	3740.	4452.	5243.	6112.
50.0	492.	726.	1018.	1371.	1790.	2278.	2839.	3476.	4193.	4993.	5878.	6853.
75.0	605.	894.	1253.	1688.	2204.	2805.	3495.	4280.	5163.	6147.	7238.	8437.
100.0	864.	1276.	1788.	2409.	3145.	4002.	4988.	6108.	7367.	8772.	10328.	12040.
200.0	1001.	1478.	2073.	2792.	3645.	4639.	5781.	7079.	8539.	10167.	11971.	13955.
300.0	1232.	1820.	2552.	3438.	4486.	5712.	7118.	8716.	10513.	12518.	14738.	17182.
400.0	1428.	2110.	2898.	3984.	5201.	6620.	8250.	10102.	12185.	14505.	17082.	19914.
500.0	1602.	2366.	3316.	4468.	5832.	7423.	9250.	11327.	13663.	16268.	19154.	22329.
750.0	1972.	2813.	4083.	5501.	7181.	9139.	11389.	13746.	16822.	20030.	23563.	27492.
1000.0	2286.	3376.	4732.	6375.	8323.	10592.	13201.	16164.	19497.	23215.	27333.	31866.
2000.0	3261.	4817.	6753.	9098.	11877.	15115.	18837.	23066.	27823.	33125.	39005.	45470.
3000.0	4016.	5921.	8315.	11201.	14623.	18610.	23193.	28399.	34256.	40785.	48023.	55584.
4000.0	4654.	6874.	9637.	12982.	16948.	21570.	26881.	32915.	39703.	47275.	55660.	64887.
5000.0	5215.	7708.	10806.	14557.	19004.	24186.	30141.	36907.	44518.	52005.	62411.	72756.

TABLE 7. CARBON MONOXIDE TOLUENE TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN); DELTA-T (DEG F), AND 100 PPM (30-MINUTE SPELL).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	7.	
1.0	48.	71.	100.	135.	176.	224.	279.	342.	412.	491.	578.	674.
5.0	110.	163.	228.	308.	402.	511.	637.	780.	941.	1121.	1320.	1538.
10.0	157.	233.	326.	439.	573.	730.	910.	1114.	1343.	1600.	1883.	2195.
15.0	194.	286.	401.	541.	706.	899.	1120.	1371.	1654.	1969.	2316.	2703.
20.0	225.	332.	465.	627.	818.	1041.	1298.	1589.	1917.	2283.	2681.	3133.
30.0	277.	405.	573.	772.	1007.	1282.	1598.	1957.	2360.	2810.	3305.	3857.
40.0	321.	474.	664.	894.	1168.	1486.	1852.	2268.	2736.	3257.	3835.	4471.
50.0	360.	531.	745.	1003.	1309.	1660.	2077.	2543.	3067.	3652.	4300.	5013.
75.0	443.	654.	917.	1235.	1612.	2052.	2557.	3131.	3776.	4497.	5294.	6172.
100.0	532.	783.	1108.	1502.	1967.	2504.	3115.	3800.	4569.	5424.	6367.	7400.
150.0	632.	933.	1308.	1762.	2300.	2928.	3649.	4468.	5389.	6417.	7555.	8807.
200.0	732.	1081.	1516.	2042.	2600.	3253.	4029.	4918.	5930.	7074.	8356.	9788.
300.0	901.	1331.	1867.	2515.	3283.	4178.	5207.	6376.	7690.	9157.	10781.	12568.
400.0	1045.	1543.	2163.	2915.	3805.	4842.	6035.	7389.	8913.	10613.	12496.	14567.
500.0	1172.	1730.	2426.	3268.	4260.	5430.	6767.	8286.	9994.	11900.	14011.	16334.
750.0	1442.	2131.	2987.	4024.	5253.	6685.	8331.	10201.	12305.	14652.	17251.	20110.
1000.0	1672.	2465.	3462.	4663.	6088.	7748.	9656.	11824.	14262.	16982.	19954.	23308.
2000.0	2386.	3524.	4940.	6655.	8688.	11057.	13780.	16873.	20352.	24234.	28532.	33261.
3000.0	2937.	4338.	6082.	8194.	10696.	13613.	16906.	20774.	25058.	29837.	35125.	40952.
4000.0	3405.	5026.	7049.	9497.	12397.	15770.	19664.	24077.	29042.	34562.	40715.	47465.
5000.0	3817.	5638.	7904.	10648.	13901.	17682.	22048.	26998.	32565.	38776.	45653.	53221.

TABLE 8. CHLORINE TOL TABLE. TILIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 2 PPM (30-MINUTE SPELL).

SS LB/MIN	DELTA-T (DEG F)													
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.		
1.0	223.	330.	462.	623.	813.	1035.	1290.	1579.	1905.	2266.	2670.	3113.		
5.0	510.	753.	1056.	1422.	1857.	2303.	2945.	3606.	4349.	5179.	6097.	7108.		
10.0	728.	1075.	1506.	2029.	2649.	3372.	4202.	5145.	6206.	7390.	8701.	10149.		
15.0	896.	1323.	1855.	2499.	3262.	4151.	5174.	6335.	7641.	9099.	10712.	12488.		
20.0	1038.	1533.	2150.	2896.	3781.	4811.	5996.	7342.	8856.	10546.	12416.	14474.		
30.0	1278.	1888.	2647.	3566.	4655.	5924.	7383.	9040.	10904.	12984.	15287.	17821.		
40.0	1482.	2188.	3068.	4133.	5395.	6866.	8557.	10478.	12638.	15045.	17716.	20655.		
50.0	1661.	2454.	3440.	4634.	6045.	7699.	9595.	11748.	14171.	16874.	19867.	23160.		
75.0	2045.	3021.	4235.	5705.	7448.	9479.	11813.	14465.	17448.	20775.	24460.	28515.		
150.0	2515.	4311.	6043.	8141.	10626.	13527.	16857.	20641.	24898.	29647.	34905.	40691.		
200.0	3383.	4556.	7004.	9436.	12318.	15678.	19538.	23924.	28858.	34361.	40456.	47162.		
300.0	4165.	6152.	8624.	11618.	15167.	19303.	24056.	29456.	35530.	42306.	49816.	58067.		
400.0	4827.	7130.	9995.	13465.	17579.	22372.	27891.	34140.	41180.	49034.	57731.	67301.		
500.0	5413.	7555.	11208.	15098.	19711.	25066.	31263.	38280.	46175.	54981.	64732.	75463.		
750.0	6664.	9843.	13755.	18590.	24268.	30800.	38491.	47132.	56851.	67693.	79706.	92912.		
1000.0	7724.	11406.	15994.	21540.	28127.	35757.	44613.	54627.	65852.	78458.	92375.	107687.		
2000.0	11022.	16280.	22823.	30746.	40138.	50863.	63663.	77952.	94029.	111901.	131820.	153671.		
3000.0	13571.	20044.	28100.	37855.	49419.	62895.	78383.	95977.	115770.	137949.	162249.	189203.		
4000.0	15725.	23232.	32565.	43875.	57276.	72697.	90848.	111240.	134180.	159770.	188105.	218291.		
5000.0	17637.	26045.	36519.	49197.	64224.	81738.	101866.	124712.	150454.	179148.	210523.	245887.		

TABLE 9. CHLORINE PENTAFLOURIDE TOLL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND G.3 PPM (1/5 OF 30-MINUTE REL).

SS LB/MIN	DELTA-T (DEG F)													
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.		
1.0	432.	638.	895.	1206.	1574.	2003.	2496.	3057.	3687.	4390.	5165.	6026.		
5.0	587.	1458.	2043.	2793.	3594.	4574.	5700.	6980.	8419.	10024.	11803.	13759.		
10.0	1408.	2000.	2916.	3928.	5126.	6527.	8134.	9960.	12014.	14305.	16842.	19634.		
15.0	1734.	2561.	3590.	4837.	6314.	8036.	10015.	12263.	14792.	17613.	20757.	24174.		
20.0	2010.	2966.	4161.	5606.	7318.	9314.	11607.	14213.	17144.	20414.	24034.	28018.		
30.0	2474.	3655.	5123.	6902.	9010.	11467.	14291.	17499.	21108.	25134.	29592.	34497.		
40.0	2868.	4236.	5938.	8000.	10443.	13291.	16564.	20282.	24465.	29130.	34257.	39983.		
50.0	3216.	4750.	6658.	8970.	11710.	14903.	18573.	22742.	27432.	32663.	38457.	44832.		
75.0	3950.	5848.	8198.	11044.	14417.	18349.	22867.	28000.	33775.	40216.	47345.	55198.		
150.0	5650.	8345.	11699.	15700.	20574.	26164.	32632.	39957.	48197.	57365.	67568.	78760.		
200.0	6548.	9672.	13559.	18266.	23846.	30346.	37821.	46311.	55861.	66515.	78313.	91294.		
300.0	8062.	11908.	16694.	22409.	29359.	37505.	46566.	57019.	68778.	81894.	96420.	112403.		
400.0	9345.	13802.	19349.	26066.	34028.	43307.	53972.	66087.	79715.	94918.	111753.	130278.		
500.0	10478.	15476.	21695.	29227.	38155.	48500.	60517.	74102.	89383.	106430.	125307.	146079.		
750.0	12901.	18054.	25712.	35965.	46977.	59767.	74510.	91235.	110050.	131038.	154280.	179855.		
1000.0	14952.	22084.	30960.	41707.	54448.	69255.	86359.	105744.	127551.	151677.	178615.	208456.		
2000.0	21237.	31514.	44180.	59517.	77698.	99885.	123236.	150899.	182017.	216730.	255172.	297470.		
3000.0	26270.	38801.	54395.	73279.	95663.	121749.	151730.	185769.	224103.	266642.	314171.	366250.		
4000.0	30448.	44571.	63045.	84952.	110676.	141111.	175859.	215334.	259741.	309277.	364133.	424494.		
5000.0	34141.	50425.	70692.	95233.	124323.	158225.	197138.	241451.	291243.	346787.	408256.	475978.		

TABLE 10. CHLORINE TRIFLUORIDE TOL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND C.O.F.M (1/5 OF 30-MINUTE EEL).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	361.	534.	748.	1008.	1316.	1675.	2087.	2556.	3083.	3671.	4322.	5038.
5.0	625.	1215.	1759.	2302.	3035.	3624.	4766.	5836.	7039.	8382.	9865.	11504.
10.0	1178.	1735.	2438.	3285.	4200.	5457.	6801.	8328.	10045.	11561.	14083.	16417.
15.0	1450.	2141.	3002.	4044.	5280.	6719.	8374.	10253.	12368.	14727.	17355.	20213.
20.0	1680.	2462.	3475.	4667.	6119.	7788.	9705.	11884.	14335.	17069.	20056.	23427.
30.0	2065.	3056.	4284.	5771.	7534.	9508.	11950.	14652.	17649.	21015.	24743.	28844.
40.0	2358.	3542.	4965.	6689.	8732.	11113.	13850.	16959.	20456.	24357.	28677.	33431.
50.0	2689.	3971.	5507.	7500.	9791.	12401.	15530.	19016.	22937.	27311.	32156.	37486.
75.0	3310.	4665.	6355.	9234.	12055.	15342.	19120.	23412.	28240.	33626.	39550.	46153.
100.0	4724.	6577.	9762.	13177.	17205.	21894.	27285.	33410.	40259.	47885.	56456.	65861.
200.0	5475.	8087.	11337.	15273.	19938.	25375.	31624.	38723.	46708.	55616.	65481.	76335.
300.0	6741.	9957.	13959.	18804.	24548.	31243.	38936.	47676.	57508.	68475.	80621.	93985.
400.0	7813.	11540.	16178.	21795.	28452.	36211.	45128.	55238.	66653.	79365.	93442.	108931.
500.0	8761.	12540.	18140.	24438.	31903.	40600.	50601.	61900.	74737.	88950.	104775.	122143.
750.0	10787.	15532.	22335.	30388.	39280.	49551.	62301.	76286.	92018.	109566.	129000.	150384.
1000.0	12502.	18465.	25887.	34873.	45520.	57941.	72209.	88417.	106651.	126551.	148515.	174299.
2000.0	17841.	26350.	36941.	49765.	64960.	82602.	103043.	126173.	152152.	181217.	213300.	248729.
3000.0	21966.	32443.	45482.	61271.	79986.	101800.	126868.	155346.	187382.	223118.	262652.	306238.
4000.0	25459.	37602.	52715.	71015.	92708.	117569.	147043.	180050.	217181.	258599.	304467.	354938.
5000.0	28547.	42163.	59108.	79626.	103952.	132299.	164877.	201867.	243521.	295562.	341354.	397986.

TABLE 11. DIBURANE TOL TABLE. TOXIC CURRIODCK LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 0.7 PPM (1/7 OF 30-MINUTE EEL.

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	799.	1181.	1655.	2230.	2911.	3705.	4617.	5654.	6820.	8120.	9561.	11145.
5.0	1825.	2656.	3780.	5092.	6647.	8400.	10543.	12900.	15572.	18541.	21830.	25449.
10.0	2605.	3847.	5394.	7266.	9435.	12072.	15045.	18422.	22221.	26455.	31152.	36316.
15.0	3207.	4737.	6641.	8946.	11679.	14863.	18523.	22681.	27359.	32576.	38354.	44712.
20.0	3717.	5450.	7657.	10369.	13550.	17227.	21409.	26208.	31710.	37757.	44454.	51823.
30.0	4577.	6760.	9470.	12760.	16600.	21010.	26430.	32307.	39041.	46487.	54732.	63605.
40.0	5304.	7835.	10983.	14796.	19310.	24500.	30637.	37514.	45250.	53880.	63456.	73952.
50.0	5548.	8785.	12315.	16591.	21656.	27505.	34352.	42063.	50726.	60414.	71130.	82921.
75.0	7323.	10816.	15163.	20427.	26600.	33508.	42295.	51789.	62469.	74383.	87576.	102094.
100.0	10450.	15434.	21638.	29149.	38053.	48430.	60350.	73904.	89145.	106140.	124573.	145689.
200.0	12112.	17885.	25079.	33785.	44105.	56152.	69954.	85557.	103321.	123026.	144041.	168858.
300.0	14912.	22025.	30877.	41596.	54303.	69110.	86129.	105402.	127211.	151472.	178338.	207901.
400.0	17284.	25528.	35787.	48211.	62938.	80101.	99826.	122234.	147441.	175560.	206095.	240962.
500.0	19380.	28624.	40128.	54058.	70571.	89816.	111933.	137058.	165323.	196852.	231768.	270187.
750.0	23861.	35242.	49406.	66558.	86889.	110503.	137814.	168749.	203540.	242268.	285356.	332659.
1000.0	27655.	40847.	57263.	77142.	100706.	128108.	159730.	195584.	235918.	280511.	330736.	385561.
2000.0	35465.	52285.	71715.	110083.	143709.	182890.	227937.	279102.	336659.	400883.	471565.	550201.
3000.0	48590.	71766.	100609.	135536.	176937.	225107.	280640.	343635.	414500.	493550.	581051.	674116.
4000.0	56317.	83179.	116605.	157090.	205075.	260990.	325269.	398282.	480416.	572038.	673500.	785144.
5000.0	63147.	93267.	130751.	176142.	229947.	292653.	364718.	446507.	538683.	641410.	755164.	883068.

TABLE 12. ETHYLENE OXIDE TOL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (CEC F), AND EC PPM (30-MINUTE SFEET).

SS LB/MIN	DELTA-T (CEC F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	42.	63.	69.	120.	156.	199.	248.	304.	366.	436.	514.	599.
5.0	98.	145.	203.	274.	357.	455.	567.	694.	837.	996.	1173.	1367.
10.0	140.	207.	290.	390.	510.	649.	808.	990.	1194.	1422.	1674.	1951.
15.0	172.	255.	357.	481.	628.	799.	995.	1219.	1470.	1750.	2061.	2403.
20.0	200.	295.	414.	557.	727.	920.	1154.	1412.	1704.	2025.	2385.	2785.
30.0	246.	363.	509.	686.	890.	1140.	1420.	1739.	2098.	2498.	2941.	3429.
40.0	285.	421.	590.	795.	1038.	1321.	1646.	2016.	2431.	2895.	3405.	3974.
50.0	320.	472.	662.	891.	1164.	1461.	1846.	2260.	2726.	3246.	3822.	4456.
75.0	393.	561.	815.	1098.	1433.	1824.	2273.	2763.	3357.	3997.	4706.	5486.
100.0	562.	825.	1163.	1566.	2045.	2602.	3243.	3971.	4790.	5704.	6715.	7828.
200.0	651.	961.	1348.	1815.	2370.	3010.	3759.	4602.	5552.	6611.	7783.	9073.
300.0	801.	1184.	1655.	2235.	2916.	3714.	4628.	5667.	6836.	8135.	9563.	11171.
400.0	929.	1372.	1923.	2591.	3382.	4304.	5364.	6568.	7923.	9434.	11107.	12948.
500.0	1041.	1538.	2156.	2905.	3792.	4820.	6015.	7365.	8883.	10576.	12454.	14518.
750.0	1282.	1854.	2655.	3576.	4604.	5842.	7295.	8968.	10838.	12923.	15332.	17875.
1000.0	1486.	2155.	3077.	4145.	5411.	6867.	8583.	10510.	12677.	15055.	17712.	20718.
2000.0	2121.	3132.	4391.	5915.	7722.	9828.	12248.	14997.	18090.	21540.	25361.	29565.
3000.0	2611.	3856.	5406.	7283.	9508.	12100.	15080.	18465.	22273.	26521.	31224.	36400.
4000.0	3026.	4470.	6266.	8441.	11020.	14025.	17478.	21401.	25815.	30736.	36156.	42189.
5000.0	3393.	5012.	7026.	9465.	12356.	15725.	19598.	23997.	28946.	34466.	40575.	47306.

TABLE 13. FLUORINE TCL TABLE, TOXIC CORRICTION LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/PIN), DELTA-T (DEG F), AND 2 PPM (1/5 OF 30-MINUTE EEL)

SS LD/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	307.	454.	637.	858.	1120.	1425.	1776.	2175.	2623.	3123.	3677.	4287.
5.0	702.	1027.	1454.	1958.	2557.	3254.	4055.	4966.	5950.	7132.	8397.	9789.
10.0	1002.	1480.	2075.	2795.	3649.	4643.	5787.	7086.	8547.	10177.	11982.	13969.
15.0	1234.	1822.	2554.	3441.	4492.	5717.	7125.	8724.	10523.	12530.	14752.	17198.
20.0	1430.	2112.	2960.	3988.	5206.	6626.	8258.	10112.	12197.	14522.	17055.	19933.
30.0	1760.	2600.	3645.	4910.	6410.	8158.	10167.	12450.	15017.	17881.	21052.	24542.
40.0	2040.	3014.	4225.	5691.	7430.	9456.	11784.	14429.	17405.	20725.	24400.	28445.
50.0	2288.	3379.	4737.	6381.	8331.	10603.	13213.	16179.	19516.	23238.	27360.	31895.
75.0	2817.	4180.	5832.	7857.	10257.	13054.	16269.	19920.	24029.	28611.	33666.	39270.
150.0	4020.	5937.	8323.	11212.	14637.	18668.	23216.	28427.	34289.	40828.	48070.	56039.
200.0	4659.	6881.	9646.	12995.	16965.	21591.	26908.	32947.	39742.	47321.	55715.	64950.
300.0	5736.	8472.	11877.	16000.	20807.	26503.	33129.	40566.	48951.	58285.	68557.	79968.
400.0	6648.	9815.	13765.	18544.	24209.	30810.	38397.	47017.	56712.	67528.	79506.	92685.
500.0	7454.	11010.	15435.	20793.	27145.	34547.	43054.	52719.	63591.	75718.	89148.	103926.
750.0	9178.	13556.	19004.	25601.	33421.	42555.	53009.	64908.	78294.	93225.	109761.	127956.
1000.0	10828.	15711.	22026.	29672.	38736.	49259.	61439.	75231.	90745.	108051.	127216.	148304.
2000.0	15180.	22420.	31431.	42343.	55277.	70351.	87675.	107355.	129454.	154150.	181359.	211632.
3000.0	18690.	27604.	38659.	52133.	68058.	86617.	107947.	132177.	159435.	189841.	223514.	260565.
4000.0	21662.	31554.	44853.	60424.	78861.	100392.	125113.	153197.	184750.	220031.	259058.	302002.
5000.0	24289.	35875.	50253.	67752.	88448.	112507.	140287.	171777.	207202.	246717.	290478.	338629.

TABLE 14. FLOX TOL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 2 PPM (1/5 OF 30-MINUTE FLUORINE BEL).

SS LB/MIN	DELTA-T (DEG. F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	307.	454.	637.	858.	1120.	1425.	1776.	2175.	2623.	3123.	3677.	4287.
5.0	702.	1037.	1454.	1958.	2557.	3254.	4055.	4966.	5990.	7132.	8357.	9789.
10.0	1002.	1480.	2075.	2795.	3649.	4643.	5787.	7086.	8547.	10177.	11982.	13969.
15.0	1234.	1822.	2554.	3441.	4492.	5717.	7125.	8724.	10523.	12530.	14753.	17198.
20.0	1430.	2112.	2960.	3988.	5206.	6626.	8258.	10112.	12197.	14523.	17055.	19933.
30.0	1760.	2600.	3645.	4910.	6410.	8158.	10167.	12450.	15017.	17881.	21053.	24542.
40.0	2040.	3014.	4225.	5691.	7430.	9450.	11784.	14429.	17405.	20725.	24400.	28445.
50.0	2288.	3375.	4737.	6381.	8331.	10603.	13213.	16179.	19516.	23238.	27380.	31895.
75.0	2817.	4160.	5832.	7857.	10257.	13054.	16269.	19920.	24029.	28611.	33666.	39270.
100.0	4020.	5937.	8323.	11212.	14637.	18628.	23216.	28427.	34289.	40828.	48076.	56039.
200.0	6659.	6881.	9646.	12995.	16965.	21500.	26908.	32947.	39742.	47321.	55715.	64950.
300.0	9736.	6472.	11877.	16000.	20887.	26563.	33129.	40506.	48931.	58263.	68557.	79968.
400.0	6648.	6815.	13765.	18544.	24209.	30810.	38397.	47017.	56712.	67528.	79506.	92685.
500.0	7454.	11010.	15435.	20793.	27145.	34247.	43054.	52719.	63591.	75718.	89146.	103926.
750.0	9178.	13556.	19004.	25601.	33421.	42555.	53009.	64908.	78254.	93225.	109761.	127956.
1000.0	10638.	15711.	22026.	29672.	38736.	49299.	61439.	75231.	90745.	108051.	127216.	148504.
2000.0	15180.	22420.	31431.	42343.	55277.	70351.	87675.	107355.	129494.	154190.	181535.	211632.
3000.0	18690.	27604.	38659.	52133.	68058.	86617.	107947.	132177.	159435.	189841.	223514.	260565.
4000.0	21662.	31554.	44853.	60424.	78881.	100392.	125113.	153197.	184790.	220031.	259056.	302002.
5000.0	24265.	35875.	50293.	67752.	88448.	112567.	140287.	171777.	207202.	246717.	290478.	336629.

TABLE 15. FUMING NITRIC ACID TCL TABLE. TOXIC CORRIDR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 3 PPM (30-MINUTE SPEL FOR NITROGEN DIOXIDE).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	226.	334.	509.	632.	824.	1049.	1308.	1601.	1931.	2300.	2708.	3156.
5.0	517.	764.	1070.	1442.	1883.	2398.	2986.	3656.	4410.	5251.	6183.	7207.
10.0	738.	1050.	1528.	2058.	2686.	3419.	4261.	5217.	6293.	7493.	8823.	10285.
15.0	900.	1342.	1881.	2534.	3308.	4209.	5246.	6424.	7748.	9226.	10862.	12663.
20.0	1053.	1555.	2180.	2937.	3834.	4879.	6080.	7445.	8981.	10693.	12590.	14677.
30.0	1296.	1914.	2684.	3615.	4720.	6007.	7496.	9167.	11057.	13166.	15501.	18070.
40.0	1502.	2215.	3111.	4190.	5470.	6962.	8677.	10624.	12815.	15255.	17966.	20944.
50.0	1684.	2486.	3488.	4699.	6134.	7807.	9729.	11913.	14370.	17110.	20145.	23484.
75.0	2074.	3063.	4294.	5785.	7552.	9612.	11979.	14667.	17692.	21066.	24803.	28914.
150.0	2960.	4371.	6126.	8255.	10777.	13716.	17094.	20931.	25247.	30062.	35354.	41261.
200.0	3430.	5066.	7103.	9568.	12491.	15897.	19812.	24259.	29262.	34842.	41023.	47823.
300.0	4223.	6238.	8745.	11781.	15379.	19573.	24393.	29868.	36028.	42855.	50368.	58830.
400.0	4895.	7230.	10135.	13654.	17825.	22600.	28272.	34618.	41757.	49721.	58540.	68244.
500.0	5489.	8107.	11365.	15310.	19487.	25457.	31701.	38817.	46822.	55751.	65640.	76520.
750.0	6758.	9881.	13982.	18850.	24608.	31318.	39031.	47792.	57647.	68642.	80817.	94213.
1000.0	7832.	11566.	16218.	21848.	28521.	36299.	45238.	55392.	66815.	79557.	93666.	109196.
2000.0	11177.	16508.	23143.	31177.	40700.	51799.	64555.	79045.	95246.	113530.	133666.	155824.
3000.0	13761.	20325.	28454.	38385.	50111.	63776.	79481.	97322.	117392.	135780.	164572.	191853.
4000.0	15550.	23557.	33025.	44490.	58080.	73916.	92120.	112799.	136060.	162008.	190744.	222363.
5000.0	17884.	26414.	37030.	49886.	65124.	82863.	103293.	126479.	152562.	181657.	213878.	245332.

TABLE 16. HAZARD CORRIDOR LENGTHS IN FEET FOR THE
30-MIN SHORT TERM PUBLIC EMERGENCY LIMIT, .24 PPM

SOURCE STRENGTH LBS/MIN	HYDRAZINE GMW: 32											
	DELTA-T (DEG F)											
	-4	-3	-2	-1	0	1	2	3	4	5	6	7
1.00	997	1472	2063	2780	3629	4618	5756	7048	8501	10122	11918	13893
5.00	2275	3361	4712	6347	8286	10545	13142	16092	19411	23113	27212	31723
10.00	3247	4796	6723	9057	11824	15049	18754	22964	27700	32982	38832	45270
15.00	3998	5905	8278	11152	14558	18528	23090	28274	34104	40608	47811	55737
20.00	4634	6844	9594	12925	16873	21474	26763	32770	39528	47066	55444	64600
30.00	5705	8426	11813	15914	20775	26440	32950	40347	48667	57949	68227	79537
40.00	6612	9766	13691	18444	24078	30644	38190	46763	56407	67164	79077	92185
50.00	7414	10951	15352	20681	26999	34361	42822	52455	63248	75310	88668	103366
75.00	9128	13483	18901	25463	33241	42306	52724	64558	77872	92723	109169	127266
100.00	10580	15627	21907	29512	38527	49034	61108	74825	90256	107468	126530	147505
150.00	13026	19240	26973	36336	47436	60371	75237	92126	111124	132317	155786	181610
200.00	15098	22300	31262	42115	54979	69972	87202	106776	128796	153359	180560	210491
300.00	18589	27456	38490	51852	67691	86150	107365	131465	158576	188818	222309	259161
400.00	21545	31822	44611	60098	78456	99851	124439	152371	183794	218846	257662	300374
500.00	24158	35681	50022	67387	87971	111961	139531	170851	206085	245388	288912	336804
750.00	29744	43931	61588	82568	108312	137848	171793	210355	253735	302125	355713	414679
1000.00	34474	50918	71382	96162	125537	159769	199113	243607	294066	350172	412281	480624
2000.00	49195	72660	101863	137225	179142	227993	284136	347917	419665	499700	589331	689858
3000.00	60570	89460	125415	168953	220563	280709	349834	428361	516696	615239	724364	844440
4000.00	70202	103687	145360	195822	255639	325350	405467	496482	598868	713079	839457	978479
5000.00	78716	116263	162959	219571	286643	364809	454443	556696	671499	799563	941381	1097432

TABLE 17. HYDROGEN CHLORIDE TLL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND S PPM (30-MINUTE SFEL).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	255.	377.	528.	712.	929.	1162.	1473.	1804.	2176.	2591.	3051.	3556.
5.0	582.	860.	1206.	1625.	2121.	2699.	3364.	4119.	4969.	5916.	6966.	8121.
10.0	831.	1226.	1721.	2319.	3027.	3852.	4801.	5878.	7091.	8443.	9940.	11588.
15.0	1023.	1511.	2119.	2855.	3727.	4743.	5911.	7247.	8730.	10355.	12235.	14267.
20.0	1186.	1752.	2450.	3309.	4319.	5497.	6851.	8388.	10118.	12048.	14185.	16536.
30.0	1460.	2157.	3024.	4074.	5318.	6768.	8435.	10328.	12458.	14834.	17465.	20360.
40.0	1653.	2550.	3505.	4721.	6164.	7844.	9776.	11970.	14429.	17193.	20242.	23598.
50.0	1898.	2805.	3930.	5294.	6911.	8750.	10902.	13422.	16190.	19278.	22657.	26460.
75.0	2337.	3451.	4838.	6518.	8509.	10829.	13490.	16526.	19934.	23735.	27945.	32577.
150.0	3335.	4925.	6904.	9301.	12143.	15454.	19259.	23582.	28446.	33870.	39876.	46489.
200.0	3865.	5706.	8002.	10780.	14074.	17911.	22322.	27333.	32969.	39257.	46226.	53881.
300.0	4758.	7028.	9853.	13273.	17328.	22053.	27483.	33652.	40552.	48334.	56907.	66340.
400.0	5515.	8146.	11420.	15384.	20083.	25500.	31654.	39004.	47047.	56020.	65956.	76890.
500.0	6184.	9134.	12805.	17250.	22519.	28600.	35717.	43734.	52753.	62814.	73956.	86215.
750.0	7614.	11246.	15765.	21238.	27720.	35200.	43975.	53847.	64951.	77338.	91055.	106149.
1000.0	8825.	13034.	18272.	24016.	32135.	40650.	50969.	62410.	75280.	89637.	105936.	123030.
2000.0	12593.	18600.	26075.	35127.	45857.	58362.	72733.	89000.	107426.	127913.	150661.	175566.
3000.0	15505.	22900.	32104.	43249.	56460.	71050.	89550.	109052.	132264.	157489.	185422.	216159.
4000.0	17970.	26542.	37209.	50126.	65438.	83203.	103791.	127089.	153298.	182534.	214910.	250535.
5000.0	20150.	29761.	41722.	56206.	73375.	93584.	116379.	142503.	171890.	204672.	240575.	280920.

TABLE 18. HYDROGEN FLUORIDE TOL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 5 PPM (30-MINUTE SPEL).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	267.	354.	553.	745.	973.	1258.	1542.	1889.	2278.	2713.	3154.	3723.
5.0	610.	901.	1265.	1701.	2221.	2826.	3522.	4313.	5202.	6154.	7253.	8502.
10.0	870.	1285.	1902.	2427.	3169.	4055.	5026.	6154.	7423.	8839.	10407.	12132.
15.0	1071.	1582.	2218.	2989.	3901.	4965.	6188.	7577.	9140.	10883.	12813.	14937.
20.0	1242.	1834.	2571.	3464.	4522.	5755.	7172.	8782.	10593.	12612.	14851.	17312.
30.0	1525.	2258.	3166.	4265.	5567.	7066.	8830.	10813.	13042.	15530.	18264.	21315.
40.0	1772.	2617.	3609.	4943.	6453.	8212.	10235.	12532.	15116.	17959.	21152.	24705.
50.0	1987.	2935.	4114.	5542.	7235.	9208.	11476.	14052.	16950.	20182.	23762.	27701.
75.0	2446.	3613.	5065.	6824.	8908.	11350.	14129.	17301.	20869.	24645.	28726.	34106.
100.0	3491.	5150.	7228.	9738.	12712.	16179.	20163.	24689.	29780.	35460.	41745.	48670.
200.0	4046.	5576.	8378.	11286.	14734.	18752.	23369.	28615.	34516.	41095.	48369.	56410.
300.0	4982.	7358.	10315.	13896.	18141.	23008.	28773.	35231.	42497.	50602.	59577.	69453.
400.0	5774.	8528.	11955.	16106.	21026.	26759.	33348.	40834.	49255.	58645.	69051.	80498.
500.0	6474.	9542.	13405.	18059.	23576.	30004.	37393.	45787.	55229.	65782.	77426.	90260.
750.0	7571.	11773.	16505.	22235.	29027.	36942.	46039.	56373.	67999.	80567.	94328.	111130.
1000.0	9239.	12645.	19130.	25771.	33643.	42817.	53360.	65338.	78812.	93843.	110488.	128803.
2000.0	13184.	19472.	27298.	36775.	48009.	61100.	76146.	93239.	112466.	133915.	157668.	183804.
3000.0	16232.	23575.	33610.	45278.	59109.	75248.	93752.	114797.	138471.	164879.	194123.	226302.
4000.0	18814.	27187.	38955.	52478.	68509.	87191.	108662.	133053.	160451.	191095.	224554.	262290.
5000.0	21055.	31157.	43680.	58843.	76618.	97766.	121640.	149190.	179956.	214276.	252282.	294102.

TABLE 19. HYDROGEN SULFIDE TOLUENE TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND ZC PPM (1/5 LF 30-MINUTE EEL).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	7.	
1.0	100.	147.	207.	278.	363.	462.	576.	706.	851.	1014.	1193.	1391.
5.0	226.	337.	472.	636.	830.	1050.	1316.	1611.	1944.	2314.	2725.	3177.
10.0	325.	460.	633.	907.	1184.	1567.	1878.	2279.	2774.	3303.	3886.	4533.
15.0	400.	591.	829.	1117.	1456.	1855.	2312.	2831.	3415.	4066.	4788.	5581.
20.0	464.	685.	961.	1294.	1690.	2150.	2680.	3281.	3958.	4713.	5545.	6469.
30.0	571.	844.	1183.	1594.	2080.	2648.	3300.	4040.	4873.	5803.	6832.	7964.
40.0	622.	978.	1371.	1847.	2411.	3069.	3824.	4683.	5648.	6725.	7918.	9231.
50.0	742.	1057.	1537.	2071.	2704.	3441.	4288.	5251.	6333.	7541.	8875.	10351.
75.0	914.	1350.	1893.	2550.	3329.	4236.	5279.	6465.	7798.	9285.	10933.	12744.
100.0	1304.	1927.	2701.	3659.	4750.	6045.	7534.	9225.	11127.	13250.	15600.	18186.
200.0	1512.	2233.	3130.	4217.	5505.	7007.	8732.	10692.	12897.	15351.	18060.	21078.
300.0	1861.	2745.	3854.	5192.	6778.	8627.	10751.	13164.	15879.	18907.	22261.	25951.
400.0	2157.	3186.	4467.	6018.	7856.	9999.	12461.	15258.	18404.	21914.	25801.	30078.
500.0	2415.	3573.	5005.	6748.	8809.	11211.	13972.	17108.	20636.	24572.	28930.	33726.
750.0	2978.	4355.	6167.	8308.	10846.	13803.	17203.	21064.	25408.	30252.	35615.	41524.
1000.0	3452.	5055.	7148.	9629.	12571.	15999.	19938.	24414.	29448.	35064.	41284.	48127.
2000.0	4926.	7276.	10200.	13741.	17936.	22830.	28452.	34839.	42023.	50036.	58913.	68678.
3000.0	6065.	8556.	12558.	16918.	22086.	28109.	35031.	42894.	51740.	61607.	72534.	84558.
4000.0	7030.	10383.	14556.	19609.	25598.	32579.	40601.	49715.	59968.	71404.	84065.	98005.
5000.0	7882.	11642.	16321.	21987.	28703.	36530.	45526.	55745.	67241.	80064.	94265.	109891.

TABLE 20. MAP-1, 3, AND 4 TOL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN.), DELTA-T (DEG F), AND 50 PPM (30-MINUTE SPEL FOR UDMH).

LB/MIN	DELTA-T (DEG F)													
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.		
1.0	47.	65.	97.	130.	170.	210.	269.	330.	398.	474.	558.	650.		
5.0	106.	157.	220.	297.	380.	493.	615.	753.	908.	1081.	1272.	1484.		
10.0	152.	224.	315.	424.	553.	704.	877.	1074.	1296.	1543.	1817.	2118.		
15.0	187.	276.	387.	522.	681.	867.	1080.	1323.	1595.	1900.	2237.	2607.		
20.0	217.	320.	445.	605.	789.	1005.	1252.	1533.	1849.	2202.	2592.	3022.		
30.0	267.	394.	553.	744.	972.	1237.	1541.	1887.	2277.	2711.	3192.	3721.		
40.0	305.	457.	640.	863.	1120.	1424.	1787.	2188.	2629.	3122.	3655.	4312.		
50.0	347.	512.	718.	967.	1263.	1607.	2003.	2453.	2959.	3522.	4148.	4835.		
75.0	427.	631.	884.	1191.	1555.	1979.	2466.	3020.	3643.	4336.	5107.	5953.		
100.0	605.	900.	1262.	1700.	2219.	2824.	3520.	4310.	5198.	6190.	7288.	8496.		
200.0	706.	1043.	1462.	1970.	2572.	3273.	4079.	4995.	6025.	7174.	8441.	9847.		
300.0	870.	1284.	1801.	2426.	3167.	4000.	5022.	6150.	7418.	8833.	10410.	12123.		
400.0	1008.	1485.	2087.	2811.	3670.	4671.	5821.	7128.	8598.	10238.	12053.	14051.		
500.0	1150.	1665.	2340.	3152.	4115.	5257.	6527.	7992.	9641.	11475.	13515.	15756.		
750.0	1391.	2055.	2831.	3881.	5067.	6448.	8036.	9840.	11870.	14122.	16640.	19399.		
1000.0	1613.	2332.	3239.	4498.	5973.	7674.	9314.	11405.	13757.	16381.	19286.	22483.		
2000.0	2301.	3355.	4765.	6419.	8380.	10660.	13292.	16275.	19622.	23376.	27522.	32084.		
3000.0	2833.	4185.	5867.	7904.	10318.	13151.	16365.	20039.	24171.	28781.	33865.	39503.		
4000.0	3284.	4850.	6800.	9160.	11959.	15220.	18968.	23225.	28015.	33358.	39274.	45785.		
5000.0	3682.	5435.	7625.	10271.	13409.	17000.	21263.	26042.	31412.	37403.	44037.	51337.		

TABLE 21. METHYLENE CHLORIDE TOLUENE TOXIC CURRENT LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 40C PPM (1/5 OF 30-MINUTE EEL).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	13.	20.	28.	37.	49.	62.	73.	95.	115.	136.	161.	187.
5.0	31.	45.	63.	86.	112.	142.	177.	217.	262.	311.	367.	427.
10.0	44.	65.	91.	122.	159.	203.	253.	309.	373.	444.	523.	610.
15.0	54.	80.	112.	150.	196.	250.	311.	381.	460.	547.	644.	751.
20.0	62.	92.	129.	174.	227.	289.	361.	442.	533.	634.	747.	871.
30.0	77.	114.	159.	214.	280.	356.	444.	544.	656.	781.	919.	1072.
40.0	89.	132.	185.	249.	324.	410.	515.	630.	760.	905.	1066.	1242.
50.0	100.	148.	207.	279.	364.	463.	577.	707.	852.	1015.	1195.	1393.
75.0	123.	182.	255.	343.	448.	570.	710.	870.	1049.	1250.	1471.	1715.
100.0	176.	255.	363.	490.	639.	814.	1014.	1241.	1497.	1783.	2095.	2447.
200.0	203.	301.	421.	568.	741.	943.	1175.	1439.	1736.	2067.	2433.	2837.
300.0	251.	370.	519.	699.	912.	1161.	1447.	1772.	2137.	2544.	2996.	3492.
400.0	290.	429.	601.	810.	1057.	1345.	1677.	2053.	2477.	2949.	3472.	4048.
500.0	326.	481.	674.	908.	1185.	1509.	1883.	2302.	2777.	3307.	3893.	4539.
750.0	401.	582.	830.	1118.	1460.	1850.	2315.	2825.	3419.	4071.	4784.	5588.
1000.0	465.	686.	962.	1296.	1692.	2153.	2683.	3286.	3963.	4715.	5556.	6477.
2000.0	663.	975.	1373.	1849.	2414.	3072.	3829.	4688.	5655.	6734.	7928.	9243.
3000.0	816.	1206.	1650.	2277.	2972.	3703.	4514.	5473.	6563.	7791.	9161.	10680.
4000.0	946.	1357.	1959.	2639.	3445.	4384.	5464.	6691.	8070.	9605.	11314.	13189.
5000.0	1061.	1567.	2196.	2959.	3863.	4916.	6127.	7502.	9049.	10775.	12686.	14789.

TABLE 22. HAZARD CORRIDOR LENGTHS IN FEET FOR THE
30-MIN SHORT TERM PUBLIC EMERGENCY LIMIT, .48 PPM

SOURCE STRENGTH LBS/MIN	MONOMETHYL HYDRAZINE (MMH) GMW: 46											
	DELTA-T (DEG F)											
	-4	-3	-2	-1	0	1	2	3	4	5	6	7
1.00	580	856	1200	1617	2111	2687	3348	4100	4945	5888	6933	8082
5.00	1324	1955	2741	3692	4820	6135	7645	9361	11292	13445	15830	18454
10.00	1889	2790	3911	5269	6878	8754	10910	13359	16114	19187	22590	26334
15.00	2326	3435	4815	6487	8469	10778	13432	16448	19839	23623	27813	32423
20.00	2696	3981	5581	7519	9816	12492	15568	19063	22994	27380	32236	37580
30.00	3319	4902	6872	9257	12085	15381	19168	23471	28311	33710	39689	46269
40.00	3847	5631	7965	10729	14007	17827	22216	27203	32813	39071	46001	53627
50.00	4313	6379	8931	12031	15706	19989	24911	30503	36793	43810	51580	60131
75.00	5310	7843	10995	14813	19337	24610	30671	37555	45300	53939	63507	74034
100.00	6155	9090	12744	17168	22412	28524	35548	43528	52504	62517	73606	85807
150.00	7578	11192	15691	21138	27595	35119	43768	53592	64644	76972	90625	105648
200.00	8783	12972	18186	24499	31983	40704	50728	62115	74924	89213	105037	122448
300.00	10814	15972	22391	30164	39378	50116	62457	76477	92248	109841	129323	150761
400.00	12533	18512	25952	34961	45640	58085	72389	88638	106915	127308	149889	174736
500.00	14053	20757	29094	39201	51175	65130	81169	99389	119885	142748	168058	195928
750.00	17303	25556	35827	48265	63008	80190	99936	122369	147604	175754	206928	241230
1000.00	20054	29620	41525	55940	73028	92942	115829	141829	171077	203704	239835	279592
2000.00	28618	42268	59256	79827	104212	132630	165290	202392	244130	290669	342248	398982
3000.00	35235	52042	72957	98285	128307	163286	203508	249189	300577	357901	421382	491233
4000.00	40838	60318	84560	113915	148712	189264	235871	288817	348377	414817	488393	569353
5000.00	45791	67633	94815	127730	166748	212219	264478	323845	390629	465127	547626	638405

MONOMETHYL HYDRAZINE (MMH)

TABLE 21. METHYLENE CHLORIDE TLV TABLE. TOXIC CURRENT LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 400 PPM (1/5 OF 30-MINUTE EEL).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	13.	20.	28.	37.	49.	62.	78.	95.	115.	136.	161.	187.
5.0	31.	45.	63.	86.	112.	142.	177.	217.	262.	311.	367.	427.
10.0	44.	65.	91.	122.	159.	204.	253.	309.	373.	444.	523.	610.
15.0	54.	80.	112.	150.	196.	250.	311.	381.	460.	547.	644.	751.
20.0	62.	92.	129.	174.	227.	289.	361.	442.	533.	634.	747.	871.
30.0	77.	114.	159.	214.	280.	358.	444.	544.	656.	781.	919.	1072.
40.0	89.	132.	185.	249.	324.	410.	515.	630.	760.	905.	1066.	1242.
50.0	100.	148.	207.	279.	364.	463.	577.	707.	852.	1015.	1195.	1393.
75.0	123.	182.	255.	343.	448.	570.	710.	870.	1049.	1250.	1471.	1715.
100.0	176.	255.	363.	490.	639.	814.	1014.	1241.	1497.	1783.	2095.	2447.
200.0	203.	301.	421.	568.	741.	943.	1175.	1439.	1736.	2067.	2433.	2837.
300.0	251.	370.	519.	699.	912.	1161.	1447.	1772.	2137.	2544.	2996.	3492.
400.0	290.	425.	601.	810.	1057.	1345.	1677.	2053.	2477.	2945.	3472.	4048.
500.0	326.	481.	674.	908.	1185.	1509.	1880.	2302.	2777.	3307.	3892.	4539.
750.0	401.	552.	830.	1118.	1460.	1856.	2315.	2835.	3419.	4071.	4794.	5588.
1000.0	465.	686.	962.	1296.	1692.	2153.	2683.	3286.	3963.	4715.	5556.	6477.
2000.0	663.	975.	1373.	1849.	2414.	3072.	3829.	4688.	5655.	6734.	7928.	9243.
3000.0	816.	1206.	1650.	2277.	2972.	3703.	4574.	5491.	6563.	7791.	9180.	10730.
4000.0	946.	1357.	1959.	2639.	3440.	4384.	5464.	6691.	8070.	9605.	11314.	13189.
5000.0	1061.	1567.	2196.	2959.	3863.	4916.	6127.	7502.	9049.	10775.	12664.	14789.

TABLE 22. HAZARD CORRIDOR LENGTHS IN FEET FOR THE
30-MIN SHORT TERM PUBLIC EMERGENCY LIMIT, .48 PPM

MONOMETHYL HYDRAZINE (MMH)
GMV: 46

SOURCE STRENGTH LBS/MIN	DELTA-T (DEG F)											
	-4	-3	-2	-1	0	1	2	3	4	5	6	7
1.00	560	856	1200	1617	2111	2687	3348	4100	4945	5888	6933	8082
5.00	1324	1955	2741	3692	4820	6135	7645	9361	11292	13445	15830	18454
10.00	1889	2790	3911	5269	6878	8754	10910	13359	16114	19187	22590	26334
15.00	2326	3435	4815	6487	8469	10778	13432	16448	19839	23623	27813	32423
20.00	2696	3981	5581	7519	9816	12492	15568	19063	22994	27380	32236	37580
30.00	3319	4902	6872	9257	12085	15381	19168	23471	28311	33710	39689	46269
40.00	3847	5681	7965	10729	14007	17827	22216	27203	32813	39071	46001	53627
50.00	4313	6370	8931	12031	15706	19989	24911	30503	36793	43810	51580	60131
75.00	5310	7843	10995	14813	19337	24610	30671	37555	45300	53939	63507	74034
100.00	6155	9090	12744	17168	22412	28524	35548	43528	52504	62517	73606	85807
150.00	7578	11192	15691	21138	27595	35119	43768	53592	64644	76972	90625	105648
200.00	8783	12972	18186	24499	31983	40704	50728	62115	74924	89213	105037	122448
300.00	10814	15972	22391	30164	39378	50116	62457	76477	92248	109841	129323	150761
400.00	12533	18512	25952	34961	45640	58086	72389	88638	106918	127308	149889	174736
500.00	14053	20757	29099	39201	51175	65130	81169	99389	119885	142748	168068	195928
750.00	17303	25556	35827	48265	63008	80190	99936	122369	147604	175754	206928	241230
1000.00	20054	29620	41525	55940	73028	92942	115829	141829	171077	203704	239835	279592
2000.00	28618	42268	59256	79827	104212	132630	165290	202392	244130	290689	342248	398982
3000.00	35235	52042	72957	98285	128307	162296	203508	249189	300577	357901	421382	491233
4000.00	40838	60318	84560	113015	148712	189264	235871	288817	348377	414817	488393	569353
5000.00	45791	67633	94815	127730	166748	212219	264476	323845	390629	465127	547626	638405

MONOMETHYL HYDRAZINE (MMH)

TABLE 23. HAZARD CORRIDOR LENGTHS IN FEET FOR THE
30-MIN SHORT TERM PUBLIC EMERGENCY LIMIT, 2 PPM

SOURCE STRENGTH LBS/MIN	NITROGEN DIOXIDE GMW: 46											
	DELTA-T (DEG F)											
	-4	-3	-2	-1	0	1	2	3	4	5	6	7
1.00	279	412	577	778	1015	1292	1610	1972	2378	2832	3334	3887
5.00	637	940	1318	1776	2318	2950	3677	4502	5430	6466	7613	8875
10.00	908	1342	1881	2534	3308	4210	5246	6424	7749	9227	10863	12664
15.00	1118	1652	2316	3120	4073	5183	6460	7909	9541	11360	13375	15592
20.00	1296	1915	2684	3616	4720	6007	7487	9167	11058	13167	15502	18072
30.00	1596	2357	3305	4452	5812	7396	9218	11287	13615	16211	19086	22250
40.00	1850	2732	3830	5160	6736	8573	10684	13082	15780	18789	22122	25789
50.00	2074	3063	4295	5786	7553	9612	11979	14668	17693	21068	24805	28916
75.00	2554	3772	5288	7123	9299	11835	14749	18060	21784	25939	30540	35602
100.00	2960	4372	6129	8256	10778	13717	17095	20932	25249	30064	35397	41264
150.00	3644	5382	7546	10165	13270	16889	21047	25772	31087	37015	43581	50805
200.00	4224	6238	8745	11781	15380	19574	24395	29870	36030	42902	50511	58885
300.00	5200	7681	10768	14506	18937	24100	30035	36777	44301	52822	62190	72500
400.00	6027	8902	12480	16812	21948	27933	34811	42626	51416	61222	72080	84029
500.00	6758	9982	13994	18851	24610	31321	39033	47795	57652	68647	80822	94220
750.00	8321	12290	17229	23210	30300	38563	48059	58846	70982	84519	99510	116006
1000.00	9644	14244	19959	26901	35119	44695	55701	68205	82270	97960	115335	134454
2000.00	13762	20327	28496	38388	50115	63781	79487	97329	117400	139790	164585	191867
3000.00	16944	25026	35085	47264	61702	78528	97865	119833	144545	172112	202639	236231
4000.00	19639	29006	40664	54781	71514	91016	113429	138890	167532	199482	234865	273798
5000.00	22021	32524	45596	61425	80188	102055	127185	155735	187851	223676	263349	307004

NITROGEN DIOXIDE

TABLE 24. HAZARD CORRIDOR LENGTHS IN FEET FOR THE
30-MIN SHORT TERM PUBLIC EMERGENCY LIMIT, 2 FPM

SOURCE STRENGTH LBS/IN	NITROGEN TETROXIDE GMW: 46											
	DELTA-T (DEG F)											
	-4	-3	-2	-1	0	1	2	3	4	5	6	7
1.00	279	412	577	778	1015	1292	1610	1972	2378	2832	3334	3887
5.00	637	940	1318	1776	2318	2950	3677	4502	5430	6466	7613	8875
10.00	908	1342	1881	2534	3308	4210	5246	6424	7749	9227	10863	12664
15.00	1118	1652	2316	3120	4073	5183	6460	7909	9541	11360	13375	15592
20.00	1296	1915	2684	3616	4720	6007	7487	9167	11058	13167	15502	18072
30.00	1596	2357	3305	4452	5812	7396	9218	11287	13615	16211	19086	22250
40.00	1850	2732	3830	5160	6736	8573	10684	13082	15780	18789	22122	25789
50.00	2074	3063	4295	5786	7553	9612	11979	14668	17693	21058	24805	28916
75.00	2554	3772	5288	7123	9299	11835	14749	18060	21784	25939	30540	35602
100.00	2960	4372	6129	8256	10778	13717	17095	20932	25249	30064	35397	41264
150.00	3644	5382	7546	10165	13270	16889	21047	25772	31087	37015	43581	50805
200.00	4224	6238	8745	11781	15380	19574	24395	29870	36030	42902	50511	58855
300.00	5200	7681	10768	14506	18937	24100	30035	36777	44361	52822	62190	72500
400.00	6027	8902	12480	16812	21948	27933	34811	42626	51416	61222	72080	84029
500.00	6758	9982	13994	18851	24610	31321	39033	47795	57652	68647	80822	94220
750.00	8321	12290	17229	23210	30300	38543	48059	58846	70982	84519	99510	116006
1000.00	9644	14244	19969	26901	35119	44695	55701	68205	82270	97960	115335	134454
2000.00	13762	20327	28496	38388	50115	63781	79487	97329	117400	139790	164585	191807
3000.00	16944	25026	35085	47244	61702	78528	97865	119833	144545	172112	202639	236231
4000.00	19639	29006	40664	54781	71514	91016	113429	138890	167532	199482	234865	273798
5000.00	22021	32524	45596	61425	80188	102055	127185	155735	187851	223676	263349	307024

NITROGEN TETROXIDE

TABLE 25. OXYGEN DIFLUORIDE ICE TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SCURLE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND .1 PPM (1/2 OF 30-MINUTE EEL).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	1194.	1763.	2472.	3330.	4348.	5533.	6896.	8444.	10185.	12127.	14278.	16645.
5.0	2126.	4026.	5645.	7604.	9927.	12654.	15745.	19280.	23256.	27651.	32603.	38007.
10.0	3890.	5746.	8055.	10851.	14160.	18029.	22489.	27513.	33186.	39515.	46524.	54236.
15.0	4790.	7077.	9918.	13361.	17442.	22158.	27664.	33874.	40860.	48652.	57261.	66777.
20.0	5851.	8155.	11495.	15465.	20215.	25728.	32064.	39261.	47357.	56285.	66091.	77396.
30.0	6835.	10095.	14153.	19066.	24890.	31677.	39477.	48339.	58207.	69270.	81742.	95291.
40.0	7922.	11701.	16403.	22098.	28848.	36714.	45755.	56026.	67580.	80448.	94741.	110445.
50.0	8882.	13126.	18393.	24778.	32346.	41167.	51304.	62821.	75776.	90227.	106231.	123840.
75.0	10937.	16153.	22645.	30507.	39826.	50600.	63167.	77346.	93297.	111089.	130752.	152474.
150.0	15607.	23051.	32315.	43534.	56832.	72259.	90140.	110374.	133136.	158526.	186644.	217583.
200.0	18085.	26717.	37454.	50457.	65869.	83851.	104475.	127926.	154308.	183736.	216325.	252185.
300.0	22271.	32854.	46114.	62123.	81100.	103215.	128631.	157505.	189986.	226215.	266344.	310495.
400.0	25813.	38125.	53448.	72002.	93997.	119629.	149087.	182553.	220159.	262194.	308700.	359872.
500.0	28543.	42745.	59530.	80735.	105397.	134458.	167159.	204693.	246906.	293554.	344445.	403518.
750.0	35636.	52633.	73787.	99402.	129766.	165153.	205821.	252022.	303995.	361570.	426173.	496818.
1000.0	41303.	61003.	8521.	115210.	150403.	191416.	238553.	292101.	352336.	415533.	483946.	575826.
2000.0	58540.	87053.	122040.	164406.	214627.	273154.	340418.	416832.	502791.	598660.	704666.	821711.
3000.0	72567.	107161.	150257.	202420.	264252.	335312.	419128.	513210.	619045.	737105.	867645.	1011705.
4000.0	84108.	124225.	174152.	234610.	306275.	387755.	485781.	594825.	717451.	854324.	1005856.	1172593.
5000.0	94308.	135252.	185274.	263064.	343421.	437070.	546698.	666566.	804510.	957535.	1127645.	1314808.

TABLE 26. PERCHLOROETHYLENE TCL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR
 VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND GC PPM (1/5
 OF 30-MINUTE EEL).

SS LB/MIN	DELTA-T (DEG F)													
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.		
1.0	22.	32.	45.	61.	79.	101.	126.	154.	186.	222.	261.	304.		
5.0	50.	74.	103.	139.	181.	231.	288.	352.	425.	506.	596.	695.		
10.0	71.	105.	147.	198.	259.	330.	411.	503.	607.	722.	850.	991.		
15.0	98.	129.	181.	244.	319.	406.	506.	619.	747.	885.	1047.	1221.		
20.0	101.	150.	210.	283.	370.	470.	586.	718.	866.	1031.	1214.	1415.		
30.0	125.	185.	259.	349.	455.	579.	722.	884.	1066.	1265.	1454.	1742.		
40.0	145.	214.	300.	404.	527.	671.	836.	1024.	1235.	1471.	1732.	2019.		
50.0	162.	240.	336.	453.	591.	753.	938.	1148.	1385.	1645.	1942.	2264.		
75.0	200.	295.	414.	558.	728.	927.	1155.	1414.	1705.	2031.	2351.	2787.		
100.0	285.	421.	591.	796.	1039.	1322.	1648.	2018.	2434.	2898.	3412.	3977.		
200.0	331.	488.	685.	922.	1204.	1532.	1910.	2339.	2821.	3355.	3954.	4610.		
300.0	407.	601.	843.	1136.	1483.	1887.	2351.	2879.	3473.	4125.	4865.	5676.		
400.0	472.	697.	977.	1316.	1718.	2187.	2725.	3317.	4025.	4793.	5643.	6579.		
500.0	529.	781.	1096.	1476.	1927.	2452.	3056.	3742.	4513.	5374.	6321.	7376.		
750.0	651.	962.	1349.	1817.	2372.	3019.	3762.	4607.	5557.	6617.	7751.	9082.		
1000.0	755.	1115.	1563.	2106.	2749.	3495.	4361.	5340.	6441.	7665.	9025.	10526.		
2000.0	1077.	1551.	2231.	3005.	3925.	4993.	6223.	7620.	9191.	10944.	12885.	15021.		
3000.0	1327.	1955.	2747.	3700.	4831.	6148.	7662.	9382.	11316.	13474.	15864.	18494.		
4000.0	1537.	2271.	3184.	4289.	5599.	7125.	8880.	10873.	13116.	15617.	18367.	21435.		
5000.0	1724.	2546.	3570.	4809.	6278.	7990.	9957.	12192.	14707.	17511.	20611.	24035.		

TABLE 27. PERCHLORYL FLUORIDE TLL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 4 PPM (1/5 OF 30-MINUTE EEL).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	130.	191.	268.	361.	472.	600.	748.	916.	1105.	1316.	1545.	1806.
5.0	296.	437.	612.	825.	1077.	1371.	1708.	2092.	2523.	3005.	3536.	4124.
10.0	422.	623.	874.	1177.	1537.	1956.	2438.	2985.	3601.	4288.	5045.	5885.
15.0	520.	768.	1076.	1450.	1893.	2409.	3002.	3676.	4433.	5275.	6215.	7246.
20.0	602.	850.	1247.	1680.	2193.	2792.	3479.	4260.	5129.	6115.	7254.	8398.
30.0	742.	1055.	1536.	2059.	2701.	3437.	4284.	5245.	6327.	7533.	8865.	10340.
40.0	860.	1270.	1780.	2390.	3130.	3984.	4965.	6079.	7333.	8731.	10260.	11984.
50.0	964.	1424.	1996.	2689.	3510.	4467.	5567.	6816.	8222.	9750.	11527.	13437.
75.0	1187.	1753.	2457.	3310.	4321.	5500.	6854.	8392.	10123.	12054.	14152.	16544.
150.0	1693.	2501.	3506.	4724.	6167.	7840.	9781.	11976.	14446.	17201.	20252.	23609.
200.0	1963.	2855.	4064.	5475.	7147.	9096.	11336.	13881.	16743.	19536.	23412.	27363.
300.0	2417.	3565.	5004.	6741.	8800.	11199.	13957.	17090.	20615.	24540.	28900.	33690.
400.0	2801.	4137.	5755.	7813.	10199.	12980.	16177.	19808.	23893.	28450.	33496.	39048.
500.0	3141.	4638.	6503.	8760.	11456.	14555.	18139.	22210.	26791.	31900.	37555.	43784.
750.0	3867.	5711.	8006.	10786.	14080.	17920.	22333.	27346.	32985.	39276.	46242.	53908.
1000.0	4482.	6615.	9280.	12501.	16520.	20770.	25884.	31695.	38231.	45522.	53556.	62480.
2000.0	6355.	9446.	13242.	17939.	23288.	29659.	36937.	45229.	54556.	64960.	76482.	89160.
3000.0	7874.	11630.	16504.	21964.	28673.	36452.	45478.	55686.	67170.	79980.	94166.	109776.
4000.0	9126.	13475.	18897.	25456.	35233.	42295.	52710.	64542.	77852.	92695.	109141.	127235.
5000.0	10233.	15114.	21188.	28544.	37263.	47425.	59103.	72370.	87254.	103542.	122378.	142664.

TABLE 28. PENTABORANE TCL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN.), DELTA-T (DEG F), AND C.G. PPM (1/7 OF 30-MINUTE EEL).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	440.	645.	910.	1226.	1600.	2057.	2539.	3108.	3749.	4464.	5256.	6128.
5.0	1004.	1482.	2078.	2799.	3654.	4651.	5796.	7097.	8561.	10154.	12002.	13991.
10.0	1432.	2115.	2965.	3995.	5215.	6657.	8271.	10128.	12217.	14547.	17141.	19966.
15.0	1763.	2604.	3651.	4918.	6421.	8172.	10184.	12470.	15042.	17910.	21067.	24582.
20.0	2044.	3018.	4232.	5701.	7442.	9471.	11804.	14453.	17434.	20758.	24440.	28492.
30.0	2516.	3716.	5210.	7019.	9163.	11601.	14533.	17795.	21465.	25556.	30051.	35080.
40.0	2916.	4307.	6039.	8135.	10620.	13516.	16844.	20625.	24878.	29622.	34877.	40658.
50.0	3270.	4830.	6771.	9121.	11908.	15155.	18887.	23126.	27855.	33215.	39107.	45589.
75.0	4026.	5946.	8336.	11230.	14661.	18659.	23254.	28472.	34345.	40855.	48145.	56130.
100.0	5745.	8486.	11896.	16026.	20921.	26626.	33183.	40632.	49011.	58358.	68705.	80099.
200.0	6659.	9835.	13788.	18575.	24248.	30801.	38460.	47093.	56805.	67639.	79636.	92837.
300.0	8195.	12105.	16976.	22869.	29855.	37990.	47353.	57982.	69939.	83278.	98045.	114302.
400.0	9502.	14035.	19676.	26506.	34603.	44059.	54883.	67203.	81062.	96521.	113641.	132479.
500.0	10655.	15737.	22062.	29721.	38800.	49360.	61540.	75354.	90853.	108227.	127424.	148546.
750.0	13115.	19376.	27163.	36593.	47771.	60757.	75769.	92777.	111509.	133252.	156867.	182893.
1000.0	15205.	22457.	31483.	42412.	55368.	70466.	87818.	107531.	129706.	154442.	181836.	211978.
2000.0	21657.	32047.	44926.	60523.	79010.	100550.	125318.	153446.	185092.	220391.	259482.	302496.
3000.0	26714.	39456.	55314.	74516.	97279.	123800.	154293.	188527.	227886.	271350.	315475.	372438.
4000.0	30962.	45731.	64111.	86367.	112749.	143495.	178830.	218972.	264125.	314501.	370285.	431666.
5000.0	34718.	51277.	71886.	96841.	126423.	163898.	200519.	245530.	296163.	352645.	415154.	484019.

TABLE 29. SULFUR DIOXIDE TCL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 4 PPM (1/5 LF 30-MINUTE BEI).

SS LB/MIN	DELTA-T (DEG F)											
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	165.	243.	341.	460.	600.	764.	952.	1166.	1406.	1674.	1971.	2298.
5.0	376.	556.	775.	1050.	1371.	1744.	2174.	2662.	3211.	3823.	4501.	5247.
10.0	537.	753.	1112.	1498.	1956.	2469.	3102.	3798.	4562.	5455.	6423.	7488.
15.0	661.	877.	1369.	1845.	2408.	3065.	3819.	4677.	5641.	6717.	7906.	9219.
20.0	766.	1132.	1587.	2138.	2791.	3552.	4427.	5420.	6538.	7785.	9166.	10685.
30.0	944.	1354.	1954.	2632.	3436.	4373.	5451.	6672.	8050.	9585.	11285.	13156.
40.0	1094.	1615.	2265.	3051.	3983.	5069.	6317.	7735.	9330.	11105.	13075.	15248.
50.0	1226.	1811.	2539.	3421.	4466.	5683.	7083.	8673.	10461.	12446.	14666.	17097.
75.0	1510.	2230.	3126.	4212.	5498.	6997.	8721.	10678.	12880.	15337.	18057.	21050.
100.0	2155.	3182.	4461.	6010.	7846.	9969.	12444.	15238.	18380.	21886.	25767.	30039.
200.0	2497.	3688.	5171.	6966.	9094.	11573.	14423.	17661.	21303.	25366.	29865.	34816.
300.0	3075.	4541.	6366.	8576.	11196.	14249.	17758.	21745.	26229.	31231.	36770.	42866.
400.0	3564.	5263.	7379.	9940.	12977.	16513.	20582.	25203.	30400.	36157.	42618.	49882.
500.0	3956.	5802.	8274.	11146.	14551.	18518.	23079.	28259.	34087.	40588.	47767.	55708.
750.0	4920.	7266.	10187.	13723.	17915.	22800.	28415.	34793.	41968.	49972.	58636.	68589.
1000.0	5702.	8422.	11807.	15905.	20764.	26466.	32934.	40326.	48642.	57915.	68152.	79496.
2000.0	8137.	12018.	16848.	22697.	29530.	37711.	46997.	57546.	69413.	82651.	97311.	113442.
3000.0	10018.	14797.	20744.	27945.	36482.	46450.	57865.	70852.	85463.	101762.	119811.	139672.
4000.0	11612.	17150.	24043.	32389.	42283.	53813.	67065.	82119.	99054.	117545.	138864.	161854.
5000.0	13020.	19230.	26959.	36318.	47411.	60340.	75199.	92079.	111067.	132245.	155706.	181517.

TABLE 30. TRICHLORETHYLENE TCL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND SC PPM (1/5 CF 30-MINUTE EEL).

DELTA-T (DEG F)

SS LB/MIN	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.
1.0	25.	36.	51.	68.	89.	114.	142.	173.	209.	245.	283.	342.
5.0	56.	83.	116.	156.	204.	260.	323.	396.	478.	565.	670.	781.
10.0	80.	118.	165.	223.	291.	370.	462.	565.	682.	812.	956.	1114.
15.0	98.	145.	204.	274.	358.	456.	568.	696.	839.	995.	1177.	1372.
20.0	114.	168.	236.	318.	415.	528.	659.	806.	973.	1156.	1364.	1590.
30.0	140.	207.	291.	392.	511.	651.	811.	992.	1198.	1426.	1675.	1957.
40.0	163.	240.	337.	454.	593.	754.	940.	1151.	1388.	1653.	1946.	2269.
50.0	182.	265.	378.	509.	664.	846.	1054.	1290.	1556.	1853.	2182.	2544.
75.0	225.	332.	465.	627.	818.	1041.	1297.	1589.	1916.	2282.	2686.	3132.
150.0	321.	473.	664.	894.	1167.	1486.	1851.	2267.	2735.	3256.	3834.	4469.
200.0	372.	545.	769.	1036.	1353.	1722.	2146.	2628.	3169.	3774.	4443.	5180.
300.0	457.	676.	947.	1276.	1666.	2120.	2642.	3235.	3902.	4646.	5471.	6377.
400.0	530.	783.	1098.	1479.	1931.	2457.	3062.	3750.	4523.	5285.	6141.	7092.
500.0	594.	878.	1231.	1658.	2165.	2755.	3434.	4204.	5071.	6035.	7116.	8288.
750.0	732.	1081.	1516.	2042.	2665.	3392.	4228.	5176.	6244.	7435.	8754.	10205.
1000.0	848.	1253.	1757.	2366.	3084.	3932.	4900.	6000.	7237.	8617.	10146.	11827.
2000.0	1211.	1788.	2507.	3377.	4408.	5611.	6992.	8562.	10327.	12257.	14476.	16878.
3000.0	1491.	2201.	3086.	4158.	5426.	6908.	8609.	10541.	12715.	15140.	17825.	20780.
4000.0	1728.	2552.	3577.	4819.	6291.	8006.	9978.	12218.	14737.	17546.	20666.	24085.
5000.0	1937.	2861.	4011.	5403.	7054.	8977.	11188.	13699.	16524.	19676.	23166.	27006.

TABLE 31. TRICHLOROTRIFLUOROMETHANE TCL TABLE. TOXIC CORRIDOR LENGTHS (FEET) FOR VARIOUS SOURCE STRENGTHS (LB/MIN), DELTA-T (DEG F), AND 2000 PPM (1/5 CF 30-MINUTE EEL).

SS LB/MIN	DELTA-T (DEG F)														
	-4.	-3.	-2.	-1.	0.	1.	2.	3.	4.	5.	6.	7.			
1.0	4.	6.	8.	11.	14.	18.	23.	28.	33.	40.	47.	55.			
5.0	5.	13.	19.	25.	33.	41.	52.	63.	76.	91.	107.	125.			
10.0	13.	19.	26.	36.	47.	59.	74.	90.	109.	130.	153.	178.			
15.0	16.	23.	33.	44.	57.	73.	91.	111.	134.	160.	188.	219.			
20.0	18.	27.	38.	51.	66.	84.	105.	129.	156.	185.	216.	254.			
30.0	22.	33.	46.	63.	82.	104.	130.	159.	191.	228.	268.	313.			
40.0	26.	38.	54.	73.	95.	121.	150.	184.	222.	264.	311.	363.			
50.0	29.	43.	60.	81.	106.	135.	168.	206.	249.	296.	345.	407.			
75.0	36.	53.	74.	100.	131.	166.	207.	254.	306.	365.	425.	501.			
150.0	51.	76.	106.	143.	187.	238.	296.	362.	437.	521.	613.	714.			
200.0	59.	88.	123.	166.	216.	275.	343.	420.	507.	603.	710.	828.			
300.0	73.	108.	151.	204.	266.	339.	422.	517.	624.	743.	875.	1020.			
400.0	85.	125.	176.	236.	304.	393.	490.	599.	723.	861.	1014.	1182.			
500.0	95.	140.	197.	265.	346.	440.	549.	672.	811.	965.	1137.	1325.			
750.0	117.	173.	242.	326.	426.	542.	676.	828.	998.	1189.	1395.	1631.			
1000.0	136.	200.	281.	378.	494.	629.	783.	959.	1157.	1376.	1622.	1891.			
2000.0	194.	286.	401.	540.	705.	897.	1118.	1369.	1651.	1966.	2315.	2698.			
3000.0	238.	352.	493.	665.	868.	1104.	1375.	1685.	2033.	2420.	2850.	3322.			
4000.0	276.	406.	572.	770.	1006.	1280.	1595.	1953.	2356.	2805.	3303.	3851.			
5000.0	310.	457.	641.	864.	1128.	1433.	1789.	2190.	2647.	3146.	3704.	4318.			

TABLE 32. HAZARD CORRIDOR LENGTHS IN FEET FOR THE
30-MIN SHORT TERM PUBLIC EMERGENCY LIMIT, .48 PPM

UNSYMMETRICAL DIMETHYL HYDRAZINE (UDMH)
GMV: 60

SOURCE STRENGTH LBS/MI	DELTA-T (DEG F)											
	-4	-3	-2	-1	0	1	2	3	4	5	6	7
1.00	506	747	1047	1411	1842	2344	2922	3577	4315	5138	6049	7052
5.00	1155	1706	2392	3222	4206	5353	6671	8188	9853	11732	13813	16103
10.00	1648	2434	3413	4598	6002	7639	9520	11657	14060	16742	19711	22979
15.00	2029	2997	4202	5661	7390	9405	11721	14352	17311	20613	24269	28292
20.00	2352	3474	4870	6561	8565	10900	13585	16634	20064	23891	28128	32791
30.00	2896	4277	5996	8078	10545	13421	16726	20480	24704	29415	34632	40373
40.00	3356	4957	6950	9362	12222	15555	19385	23737	28632	34093	40140	46793
50.00	3763	5559	7792	10498	13705	17442	21737	26616	32105	38227	45008	52469
75.00	4634	6844	9594	12925	16873	21474	26763	32770	39528	47066	55414	64600
100.00	5370	7932	11120	14940	19557	24869	31018	37981	45814	54551	64227	74873
150.00	6612	9765	13691	18444	24078	30644	38190	46763	56407	67164	79077	92185
200.00	7664	11319	15869	21377	27907	35518	44264	54200	65377	77845	91652	106845
300.00	9436	13936	19538	26320	34360	43730	54498	66732	80493	95844	112844	131550
400.00	10936	16153	22645	30506	39824	50684	63165	77344	93294	111066	130789	152470
500.00	12263	18112	25391	34206	44654	56831	70826	86724	104609	124559	146652	170962
750.00	15098	22300	31262	42115	54979	69972	87202	106776	128746	153359	180560	210491
1000.00	17499	25846	36233	48812	63722	81099	101070	123757	149278	177747	209274	243965
2000.00	24971	36882	51706	69655	90933	115729	144228	176603	213022	253646	298637	348142
3000.00	30745	45410	63661	85761	111958	142488	177576	217435	262276	312296	367687	428638
4000.00	35635	52632	73785	99399	129762	165148	205815	252014	303985	351959	406160	466803
5000.00	39956	59015	82733	111454	145500	185177	230777	282579	340853	405858	477845	557057

UNSYMMETRICAL DIMETHYL HYDRAZINE (UDMH)

METHOD 2: CHEMICAL AND DIFFUSION FACTORS

The steps to determine the dimensions of a toxic corridor using this method are presented below. Where applicable, preferred and alternate approaches are given. The Table of Chemical Factors (Table 33) and the Table of Diffusion Factors (Table 34) are required. Two copies of a suggested worksheet are provided in Appendix A; one with a sample corridor calculation (Figure A-1) and one blank copy (Figure A-2). A flow chart for Method 2 is depicted in Figure 2.

a. STEP 1: Determine source strength (lb/min).

(1) Preferred. Obtain a source strength from the disaster response force (DRF). NOTE: Although weather personnel are not responsible for determining source strength, a toxic corridor length calculation cannot be made without it. Appendix C provides an equation for calculating evaporative source strengths based on the surface area covered by the toxic chemical spill. Use this Appendix to assist the agency responsible for estimating source strengths.

(2) Alternate. For small amounts of liquid or gaseous material (less than 2000 lb), assume the worst case which is total release of the material in 1 minute. For large amounts of a gas (2000 lb or more), assume total release over 5 minutes. For large amounts of liquid, assume a source strength of 2000 lb per minute.

(3) Alternate. For releases of a large amount of material where a source strength cannot be determined from the above procedures, go to alternate procedure in Step 5.

b. STEP 2: Determine temperature difference (ΔT ($^{\circ}F$)).

(1) Preferred. Use the mean ΔT based on at least a 10-minute record from a 54-6 foot ΔT instrument. (Available at TITAN II missile sites. Refer to Appendix B, Figure B-1.) NOTE: 54-6 foot ΔT measurements can be made by using a sling psychrometer at the 54- and 6-foot levels of a radar tower.

(2) Alternate. Use mean surface wind speed, solar elevation angle, and sky condition to obtain an estimated temperature difference from Table B-1, Appendix B. Refer to the notes in this table concerning rough terrain and forested regions prior to estimating the temperature difference.

c. STEP 3: Determine the Chemical Factor (CF).

(1) Preferred. Turn to Table of Chemical Factors (Table 33). Find the CF for the particular toxic chemical of concern and the appropriate exposure limit. This will normally be the Short-Term Public Emergency Limit (SPEL). The limit must be expressed in parts per million by volume.

(2) First alternate. If Table 33 does not contain a CF for the particular toxic chemical of concern, the CF may be obtained from Figure 3. Enter the ordinate of Figure 3 with the gram molecular weight (GMW) and project a line across the graph until the line extending from the exposure limit in parts per million is intersected. The value on the diagonal line at the point of intersection is the CF. The Bioenvironmental Engineer (BEE) may be able to provide the GMW and exposure limit for the chemical of concern.

(3) Second alternate. If Table 33 does not contain a CF for the particular toxic chemical of concern, the CF may be calculated directly using the equation below. The BEE may be able to provide the GMW and exposure limit for the chemical of concern.

$$CF = 30.476 (Cp \cdot GMW)^{-0.513}$$

where Cp = exposure limit in parts per million by volume, and
 GMW = gram molecular weight.

d. STEP 4: Determine the Diffusion Factor (DF).

(1) Preferred. Turn to the Table of Diffusion Factors (DF) (Table 34). Read across from the source strength (Q) determined in Step 1 and down from the temperature difference determined in Step 2. The intersected value is the Diffusion Factor (DF).

(2) First alternate. If Table 34 does not list a DF for the particular chemical of concern, the DF may be obtained from Figure 4. Enter the ordinate of Figure 4 with the source strength from Step 1 and project a line across the graph until the appropriate line representing the temperature difference from Step 2 is intersected. The value of the curved-diagonal line at the point of intersection is the DF.

(3) Second alternate. If Table 34 does not list a DF for the particular chemical of concern, the DF may be calculated directly from the source strength determined in Step 1 and the temperature difference determined in Step 2. Calculate DF using the following equation:

$$DF = Q^{0.513} (\Delta T + 10)^{2.53}$$

where Q = the source strength in pounds per minute, and

ΔT = the 54-6 foot temperature difference in degrees F.

e. STEP 5: Determine Toxic Corridor Length (TCL).

(1) Preferred. Toxic corridor length is the product of the chemical factor from Step 3 and the Diffusion Factor from Step 4, i.e., $TCL = CF \cdot DF$.

(2) Alternate. For releases of a large amount of material where no source strength is available, use the distance the wind would carry the material in one hour. This is an interim forecast which must be updated when particulars are known.

f. STEP 6: Determine wind direction and wind direction variability, R (degrees of azimuth). If the surface wind is equal to or less than 3 knots, go to Step 8.

(1) Preferred. Use the 10-minute recorded wind direction trace and eliminate the two furthest direction fluctuations on each side of the mean. Variability, R, is the difference in degrees between the third largest fluctuation on each side of the mean direction.

(2) Alternate. Note the wind fluctuations indicated by an anemometer dial over a 2-minute period. Variability, R, is the difference in degrees between the largest fluctuation on each side of the mean direction.

(3) Approximate. If wind direction fluctuation information is unavailable, assume R is 60° when the wind speed is between 4 and 10 knots; assume R is 30° when the wind speed is greater than 10 knots.

g. STEP 7: Determine corridor width (W) in degrees by multiplying the value obtained for R in Step 6 by 1.5.

h. STEP 8: Plot the toxic corridor.

(1) Wind speed greater than 3 knots. Draw the corridor center line from the source to the point on the wind direction circle corresponding to the direction the mean wind is blowing towards (i.e., 180 degrees from the recorded mean wind direction), as determined in Step 6. Place W/2, calculated in Step 7, on each side of the center line. Draw the lines which define each side of the corridor. See example worksheet, Figure A-1 in Appendix A.

(2) Wind speed equal to or less than 3 knots. The corridor is a circle of radius equal to the corridor length determined in Step 5.

i. STEP 9: Trend forecast. If significant changes in wind direction are expected within the next hour or two, include this information in your briefing. A change in direction that would affect evacuation is significant. Based on continued close monitoring of weather conditions, relay any significant changes in the toxic corridor forecast to the DRF. Consider changes in winds that have occurred between the time of the spill and the time of the forecast. These changes could alter the shape and size of the toxic corridor.

**TOXIC CORRIDOR CALCULATIONS
USING METHOD 2**

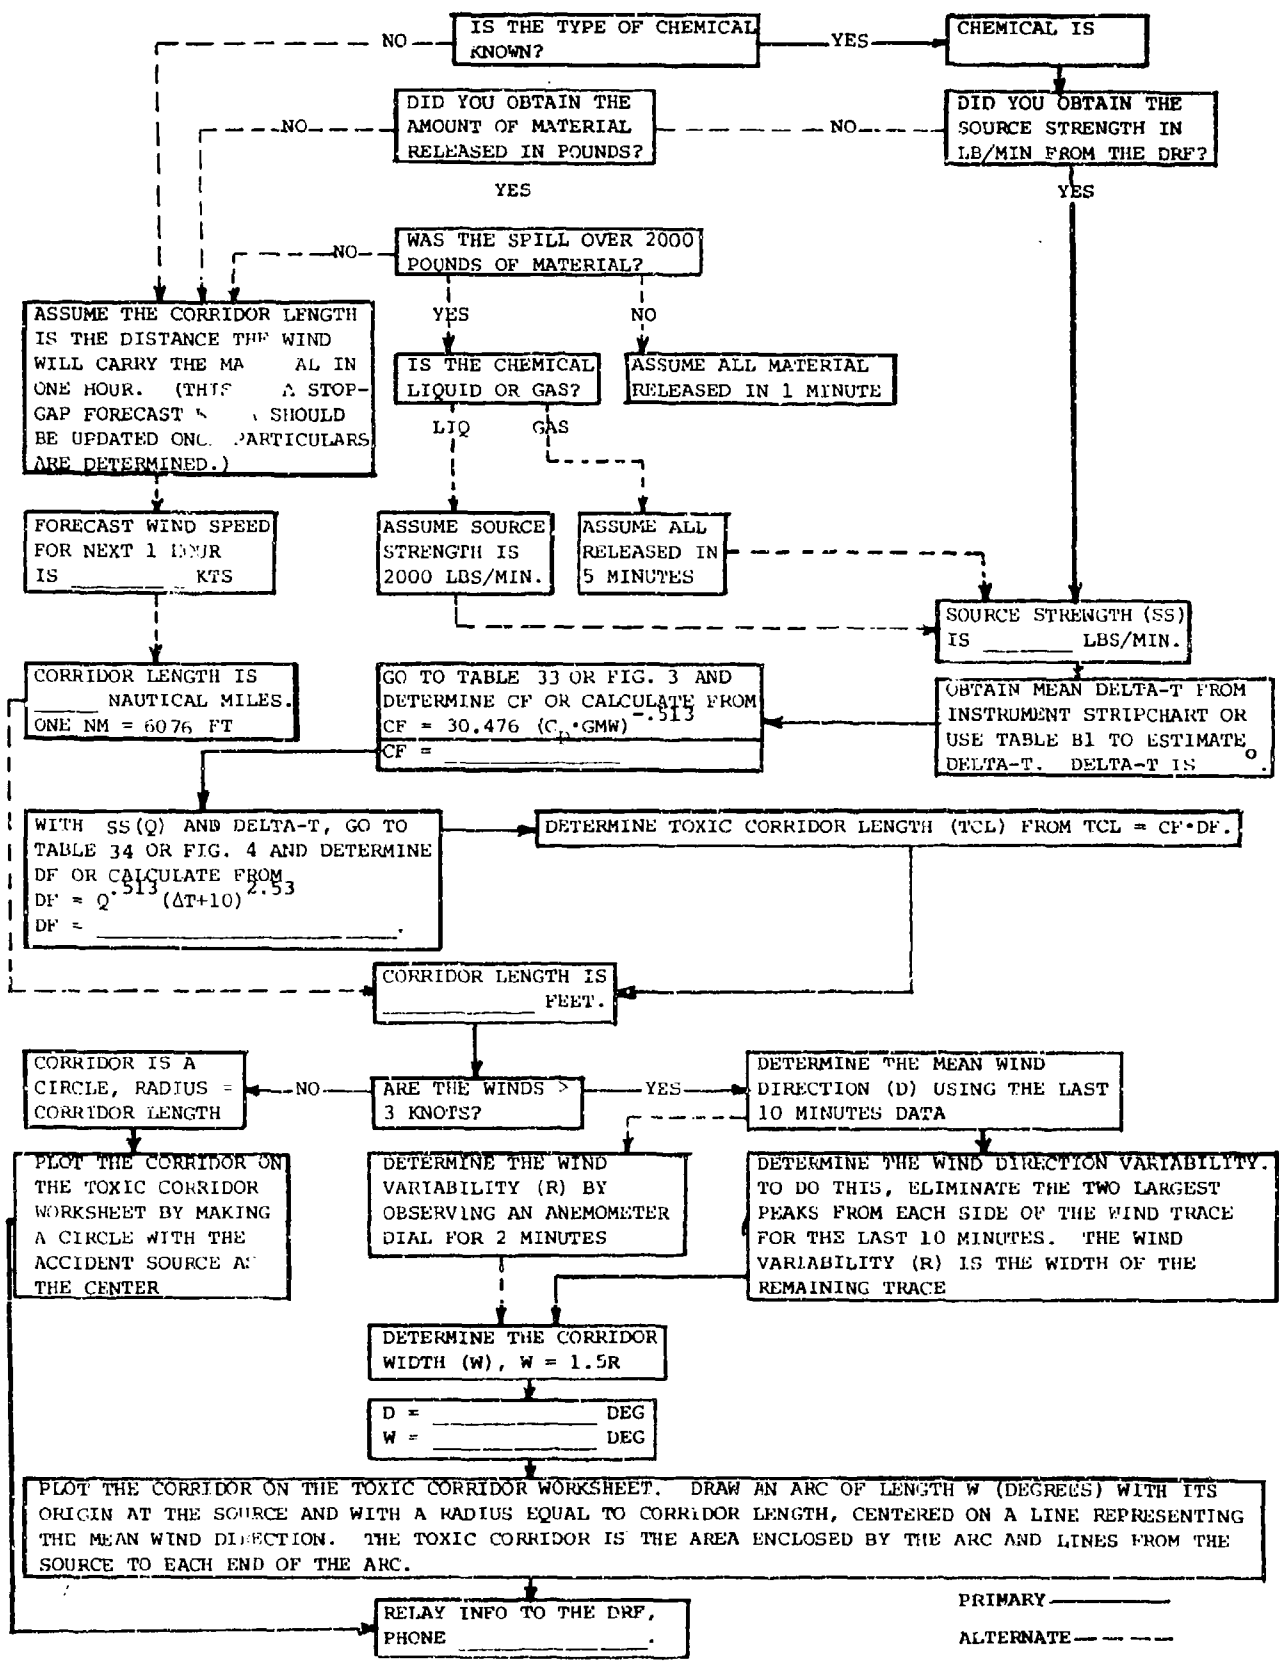


Figure 2. Flow Chart for Method 2.

Table 33. Table of Chemical Factors.

CHEMICAL FACTORS (CF)								REMARKS
TOXIC CHEMICAL	GMW	30-min SPEL (PPM)	CF	30-min EEL (PPM)	CF	10-min STFL (PPM)	CF	
Aerozine 5G (50% Hydrazine/50% UDMH)	N/A	*	*	*	*	*	*	*Use CF for hydrazine
Anhydrous Ammonia	17.031	75.0 ¹	0.78	300.0 ¹	0.38	20.0 ¹	1.53	
Aniline	93.129	20.0 ³	0.64	100.0 ²	0.28	None	-	
Bromine Pentafluoride	174.896	0.3 ³	4.0	1.5 ¹ (T)	1.75	None	-	(T) - Tentative
Carbon Disulfide	76.139	20.0 ³	0.71	100.0 ¹	0.31	None	-	
Carbon Monoxide	28.011	100.0 ¹	0.52	500.0 ¹	0.23	90.0 ¹	0.55	
Chlorine	70.906	2.0 ¹	2.40	see Remarks	1.94*	1.0	3.42	*60-min EEL: 3.0 ppm
Chlorine Pentafluoride	130.445	0.3 ³	4.64	1.5 ¹ (T)	2.03	None	-	(T) - Tentative
Chlorine Trifluoride	92.448	0.6 ³	3.88	3.0 ¹	1.70	None	-	
Diborane	16.859	0.7 ⁴	8.59	5.0 ¹	3.76	None	-	
Ethylene Oxide	44.054	80.0 ³	0.46	400.0 ¹	0.20	None	-	
Fluorine	37.997	2.0 ³	3.30	10.0 ¹	1.45	None	-	
FLOX (Fluorine/Oxygen Mixture)	N/A	*	*	*	*	None	-	*Use CF for Fluorine
Fuming Nitric Acid	N/A	*	*	*	*	*	*	*Use CF for Nitrogen Dioxide
H-70 (70% Hydrazine/ 30% Water)	N/A	*	*	*	*	*	*	*Use CF for Hydrazine
Hydrazine	32.045	20.0 ¹	1.11	20.0 ¹	1.11	15.0 ¹	1.28	Tentative limits 1/10 of existing
Hydrogen Chloride	35.461	3.0 ¹	2.74	50.0 ¹	0.65	4.0 ¹	2.43	
Hydrogen Fluoride	20.006	5.0 ¹	2.87	10.0 ¹	2.01	4.0 ¹	3.22	
Hydrogen Sulfide	34.080	20.0 ³	1.07	100.0 ¹	0.47	None	-	
MAF 1, 3, and 4 (Mixed Amine Fuels)	N/A	*	*	*	*	*	*	*Use CF for UDMH
Methylene chloride	84.933	400.0 ³	0.14	2000.0 ²	0.06	None	-	
Monomethylhydrazine (MMD)	46.072	30.0 ¹	0.75	30.0 ¹	0.75	9.0 ¹	1.38	
Nitrogen Dioxide	46.006	3.0 ¹	2.43	20.0 ¹	0.92	1.0 ¹	4.27	
Nitrogen Tetroxide	N/A	*	*	*	*	*	*	*Use CF for Nitrogen Dioxide
Nitrogen Trifluoride	71.002	150.0 ³	0.26	750.0 ¹	0.11	None	-	
Oxygen Difluoride	53.996	0.1 ⁵	12.83	0.2 ¹	8.99	None	-	
Perchloroethylene	164.902	80.0 ³	0.23	400.0 ²	0.10	None	-	
Perchloryl Fluoride	102.450	4.0 ³	1.39	20.0 ¹	0.61	None	-	
Pentaborane	63.127	0.6 ⁴	4.72	4.0 ²	1.78	None	-	
Sulfur Dioxide	64.063	4.0 ³	1.77	20.0 ¹	0.78	None	-	
Trichlorethylene	131.389	80.0 ³	0.26	400.0 ²	0.12	None	-	
Trichlorotrifluoro- ethane	187.377	2000.0 ³	0.042	10,000.0 ²	0.018	None	-	
Unsymmetrical Di- methylhydrazine	60.099	50.0 ¹	0.50	50.0 ¹	0.50	50.0 ¹	0.50	

Notes: 1. From Committee on Toxicology (EELs from Nov 79 listing; SPELs/STPLs from Jul 80 listing.)
2. From AFM 161-30, Vol II, "Liquid Propellants," 10 Apr 73.
3. 1/5 of 30-minute EEL.
4. 1/7 of 30-minute EEL.
5. 1/2 of 30-minute EEL.

Table 34. Table of Diffusion Factors (DF). The DF is a function of Temperature Difference (ΔT) and Source Strength (Q).
 $DF = Q^{0.51} (\Delta T + 10)^{2.53}$

SOURCE STRENGTH LB/MIN	DELTA T (DEG F)														
	-4	-3	-2	-1	0	1	2	3	4	5	6	7			
0.01	9	13	19	25	32	41	51	62	75	90	105	123			
0.05	21	30	42	56	73	93	116	142	171	240	240	280			
0.10	29	43	60	80	104	133	165	202	244	291	342	399			
0.50	66	97	136	182	238	303	377	462	557	663	780	910			
1.0	94	138	193	260	339	432	538	659	794	946	1113	1298			
5.0	213	314	440	593	774	985	1228	1503	1813	2159	2541	2963			
10.0	304	448	628	846	1105	1406	1752	2145	2587	3080	3626	4228			
15.0	374	552	773	1042	1350	1731	2157	2641	3185	3792	4465	5205			
20.0	433	640	896	1207	1576	2006	2499	3060	3691	4395	5175	6033			
30.0	533	787	1104	1486	1940	2469	3077	3768	4545	5411	6371	7427			
40.0	618	912	1279	1723	2249	2862	3567	4367	5267	6272	7384	8608			
50.0	693	1023	1434	1932	2521	3209	3999	4897	5906	7033	8280	9652			
75.0	853	1259	1765	2378	3104	3931	4924	6029	7272	8658	10194	11884			
100.0	988	1460	2046	2756	3598	4579	5706	6987	8428	10035	11815	13774			
160.0	1258	1857	2604	3508	4579	5827	7262	8892	10726	12771	15037	17529			
300.0	1736	2564	3595	4842	6321	8045	10026	12276	14808	17631	20759	24200			
400.0	2012	2972	4166	5612	7326	9324	11620	14228	17162	20435	24060	28048			
500.0	2256	3332	4671	6293	8215	10455	13029	15954	19244	22914	26978	31450			
750.0	2778	4103	5751	7748	10114	12872	16042	19642	23693	28211	33215	38721			
1000.0	3220	4755	6666	8980	11722	14919	18593	22766	27461	32698	38497	44879			
2000.0	4594	6785	9512	12814	16728	21289	26532	32487	39187	46660	54936	64042			
3000.0	5656	8354	11711	15776	20596	26212	32666	39999	48247	57448	67638	78850			
5000.0	7351	10856	15219	20502	26766	34064	42453	51982	62702	74660	87902	102473			
7500.0	9050	13367	18739	25242	32953	41941	52268	64000	77199	91922	108226	126166			
10,000.0	10489	15492	21718	29258	38195	48610	60580	74179	89475	106540	125436	146230			
20,000.0	14968	22107	30992	41751	54505	69367	86449	105854	127683	152034	178900	208672			
30,000.0	18429	27219	38158	51404	67107	85406	106437	130329	157206	187187	220388	256920			
50,000.0	23950	32373	49590	66805	87212	110993	138325	169375	204304	243267	286415	333894			
75,000.0	29487	43552	61056	82251	107376	136657	170308	208537	251742	295515	352639	411096			
100,000.0	34177	50478	70765	95331	124452	158389	197392	241701	291544	347145	408718	476471			

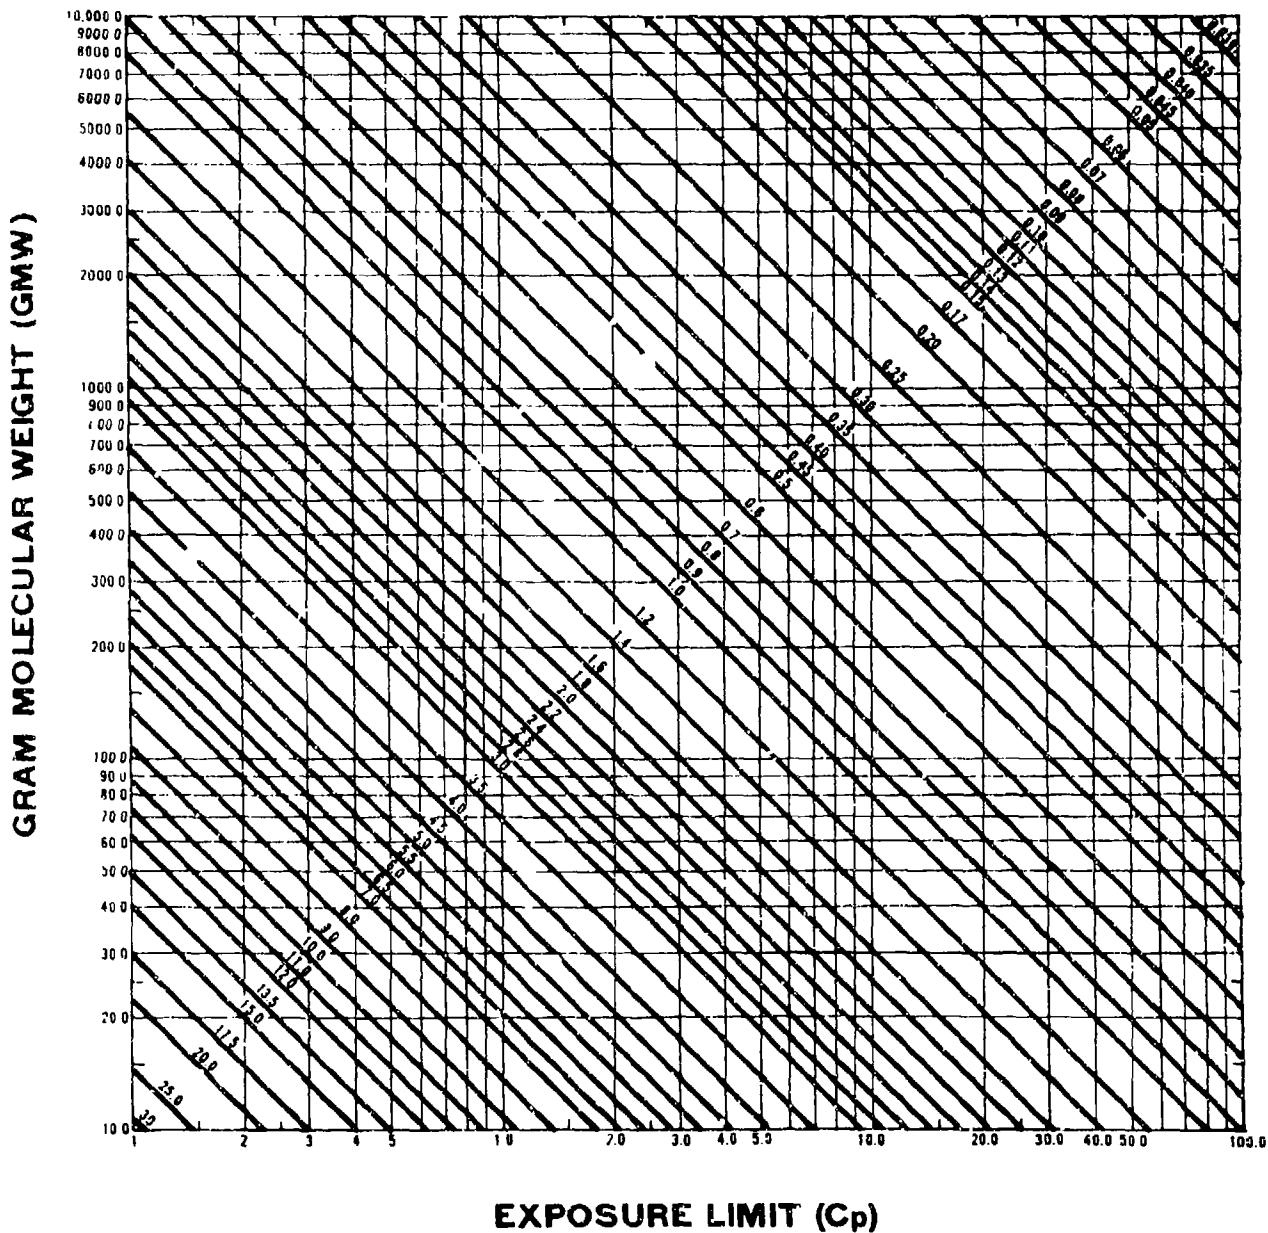


Figure 3. Nomogram for Determining Chemical Factors (CF).

$CF = 30.476(Cp \cdot GMW)^{-0.513}$. The CF values are indicated by the diagonal lines as labeled.

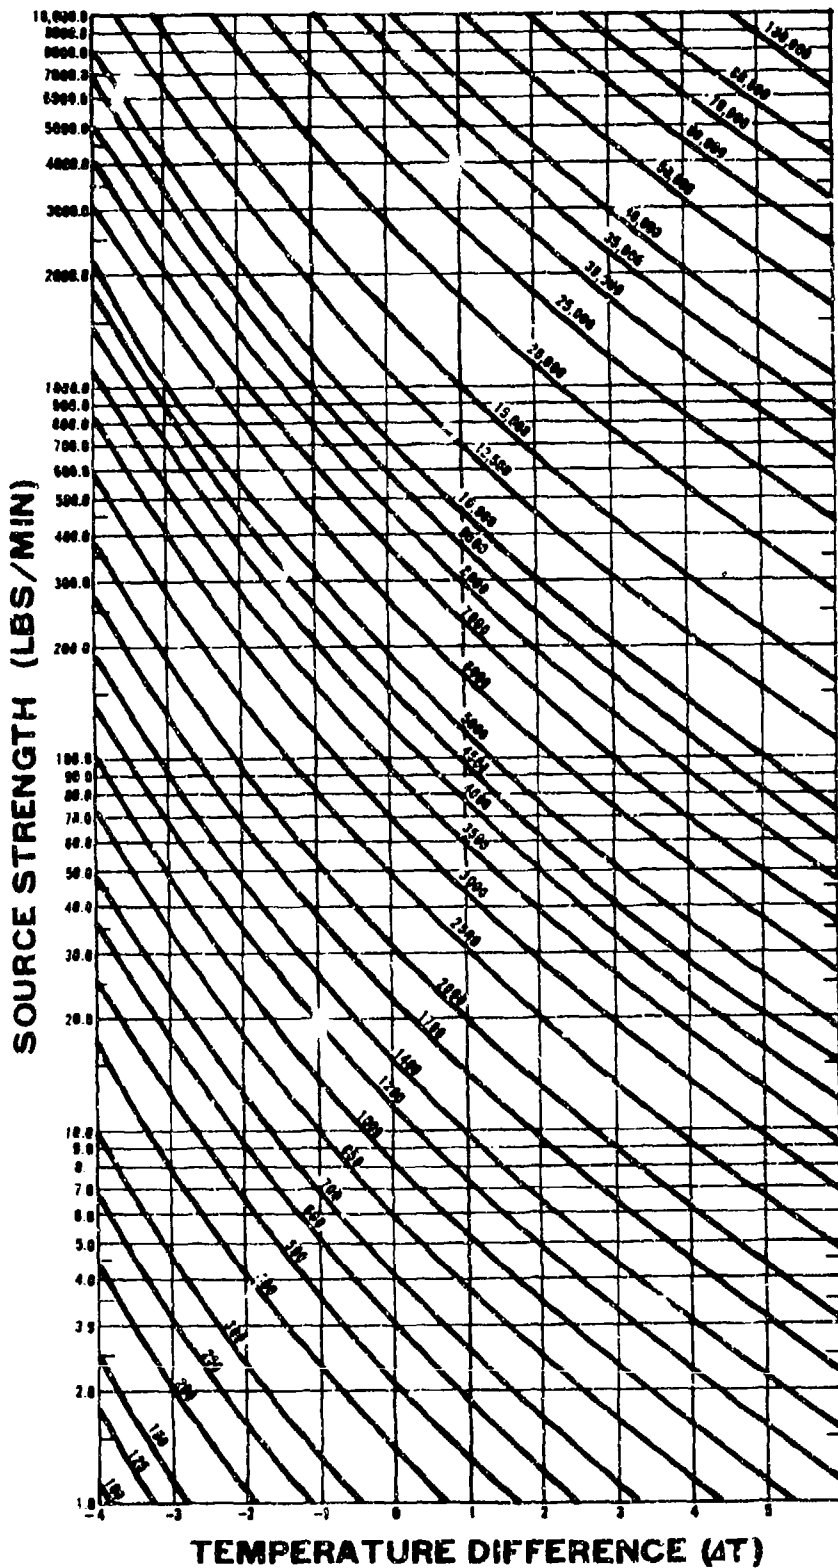


Figure 4. Nomogram for Determining Diffusion Factors (DF).
 $DF = Q^{0.513} (\Delta T + 10)^{2.53}$. The DF values are indicated by the curved diagonal lines as labeled.

Chapter 6

METHOD 3: UNIVERSAL NOMOGRAM

The steps to determine the dimensions of a toxic corridor using this method are presented below. A flow chart for using Method 3 is depicted in Figure 5. Where applicable, preferred and alternate approaches are given. The toxic corridor length nomogram, Figure 6, is required. Two copies of a suggested worksheet are provided in Appendix A; one with sample corridor calculations (Figure A-1) and one blank copy (Figure A-2).

a. STEP 1: Determine source strength (lb/min).

(1) Preferred. Obtain a source strength from the disaster response force (DRF). NOTE: Although weather personnel are not responsible for determining source strength, a toxic corridor length calculation cannot be made without it. Appendix C provides an equation for calculating evaporative source strengths based on the surface area covered by the toxic chemical spill. Use this Appendix to assist the agency responsible for estimating source strengths.

(2) Alternate. For small amounts of liquid or gas (less than 2000 lb), assume the worst case which is total release of the material in 1 minute. For large amounts of a gas (2000 lb or more), assume total release over 5 minutes. For large amounts of liquid, assume a source strength of 2000 lb per minute.

(3) Alternate. For releases of large amounts of material where a source strength cannot be determined from the above procedures, go to alternate procedure in Step 3.

b. STEP 2: Determine temperature difference (ΔT (°F)).

(1) Preferred. Use the mean ΔT based on at least a 10-minute record from a 54-6 foot ΔT instrument. (Available at TITAN II missile sites. Refer to Appendix B, Figure B-1.) NOTE: 54-6 foot ΔT measurements can be made by using a sling psychrometer at the 54- and 6-foot levels of a radar tower.

(2) Alternate. Use mean surface wind speed category, solar elevation angle, and sky condition to obtain an estimated temperature difference from Table B-1, Appendix B. Refer to the notes in this table concerning rough terrain and forested regions prior to estimating the temperature difference.

c. STEP 3: Determine Toxic Corridor Length (TCL) in feet.

(1) Preferred

(a) Enter Part A of Figure 6 with source strength determined in Step 1 and project along the constant source strength line until the diagonal line representing the temperature difference value determined in Step 2 is intersected. From this point of intersection extend a line horizontally into Part B.

(b) Enter Part C with the appropriate exposure limit (C_p) provided by the Bioenvironmental Engineer (BEE), or taken from Table 33. Extend a horizontal line from this exposure limit until the diagonal line labeled with the appropriate gram molecular weight (GMW) is intersected. The GMW for the toxic chemical of concern can be found in Table 33 or obtained from the BEE. From this intersection, project a line vertically into Part B.

(c) Read the toxic corridor length from the diagonal line at the point where the projections from Part A and Part C intersect in Part B.

(2) Alternate. For releases of a large amount of material where no source strength is available, use the distance the wind would carry the material in one hour. This is an interim forecast which must be updated when particulars are known.

d. STEP 4: Determine mean wind direction and wind direction variability, R (degrees of azimuth). If the surface wind is equal to or less than 3 knots, go to Step 6.

(1) Preferred. Use the 10-minute recorded wind direction trace and eliminate the two furthest direction fluctuations on each side of the mean. Variability, R, is the difference in degrees between the third largest fluctuation on each side of the mean direction.

(2) Alternate. Note the wind fluctuations indicated by an anemometer dial over a 2-minute period. Variability, R, is the difference in degrees between the largest fluctuation on each side of the mean direction.

(3) Approximate. If wind direction fluctuation information is unavailable, assume R is 60° when the wind speed is between 4 and 10 knots; assume R is 30° when the wind speed is greater than 10 knots.

e. STEP 5: Determine corridor width (W) in degrees by multiplying the value obtained for R in Step 4 by 1.5.

f. STEP 6: Plot the toxic corridor.

(1) Wind speed greater than 3 knots. Draw the corridor center line from the source to the point on the wind direction circle corresponding to the direction the mean wind is blowing towards (i.e., 180 degrees from the recorded mean wind direction), as determined in Step 4. Place $W/2$, calculated in Step 5, on each side of the center line. Draw the lines which define each side of the corridor. See example worksheet, Figure A-1 in Appendix A.

(2) Wind speed equal to or less than 3 knots. The corridor is a circle of radius equal to the corridor length determined in Step 3.

g. STEP 7: Trend forecast. If significant changes in wind direction are expected within the next hour or two, include this information in your briefing. A change in direction that would affect evacuation is considered significant. Based on continued close monitoring of weather conditions, relay any significant changes in the toxic corridor forecast to the DRF. Consider changes in winds that have occurred between the time of the spill and the time of the forecast. These changes could alter the shape and size of the toxic corridor.

**TOXIC CORRIDOR CALCULATIONS
USING METHOD 3**

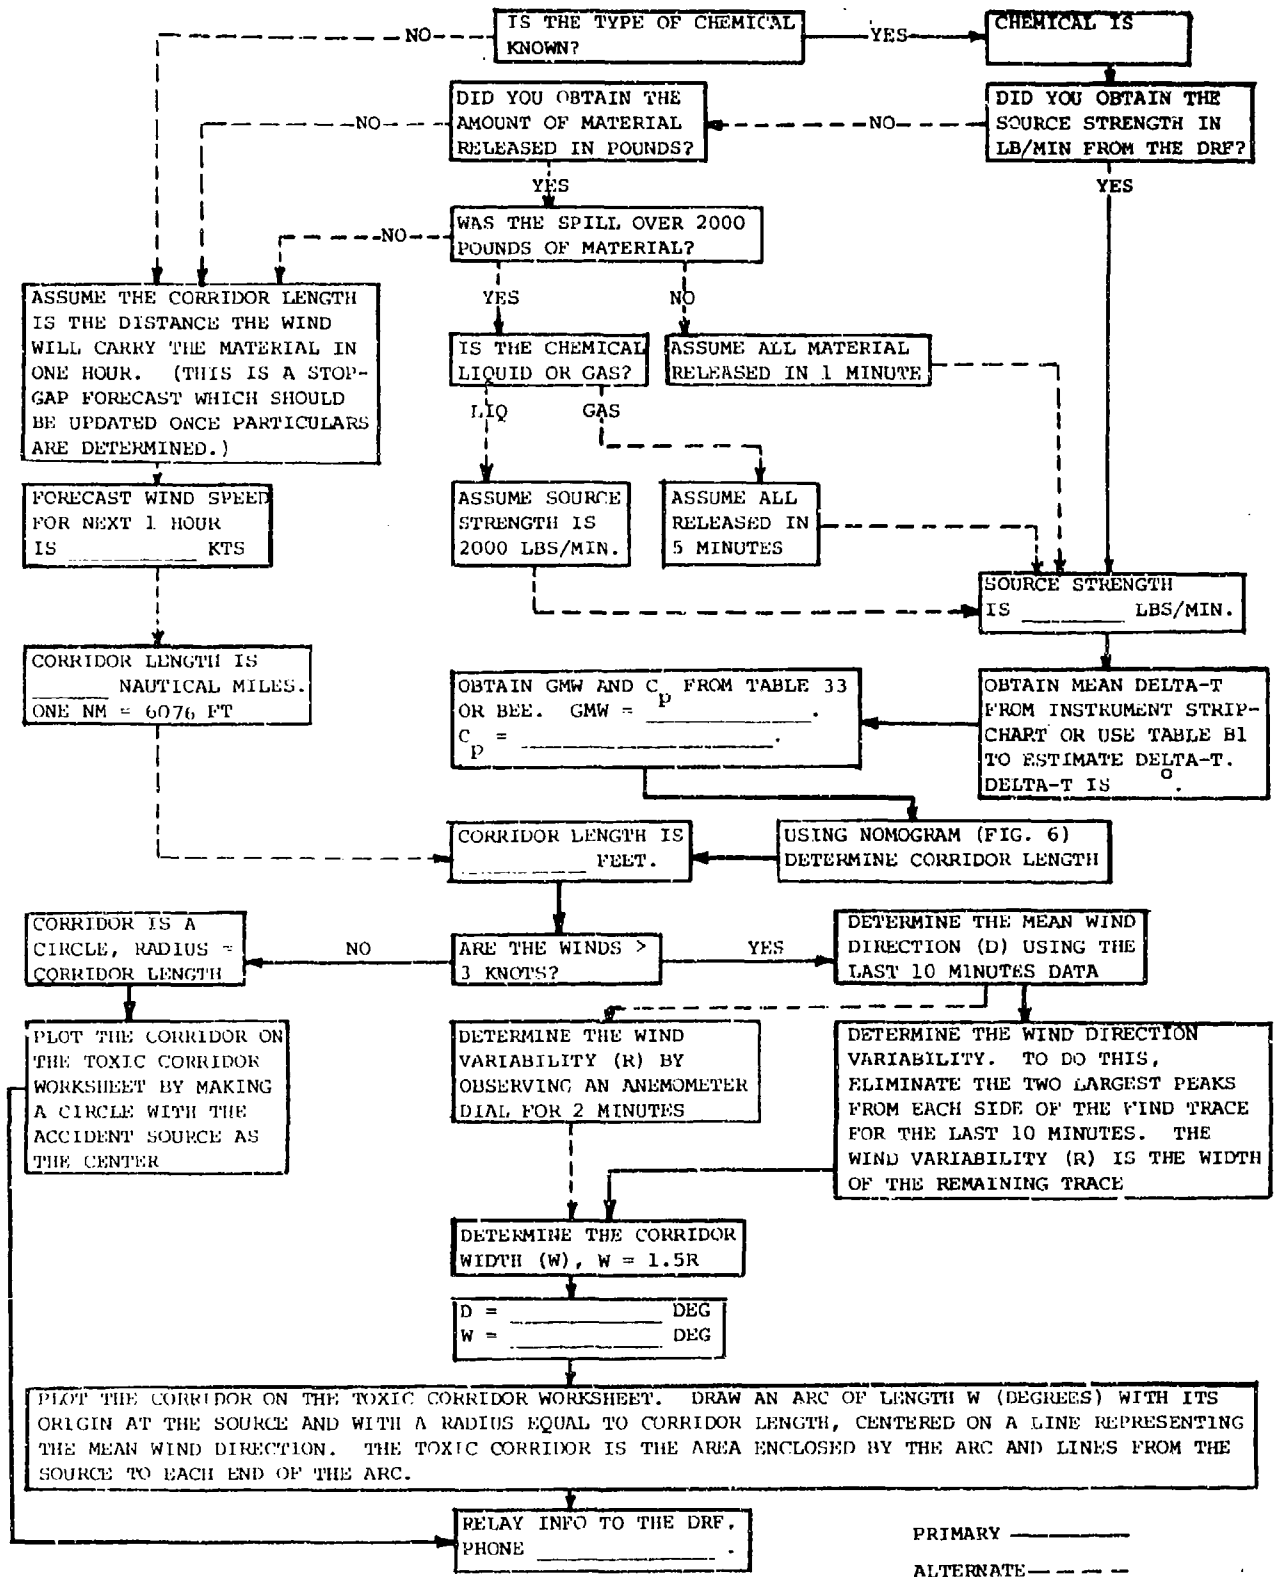


Figure 5. Flow Chart for Method 3.

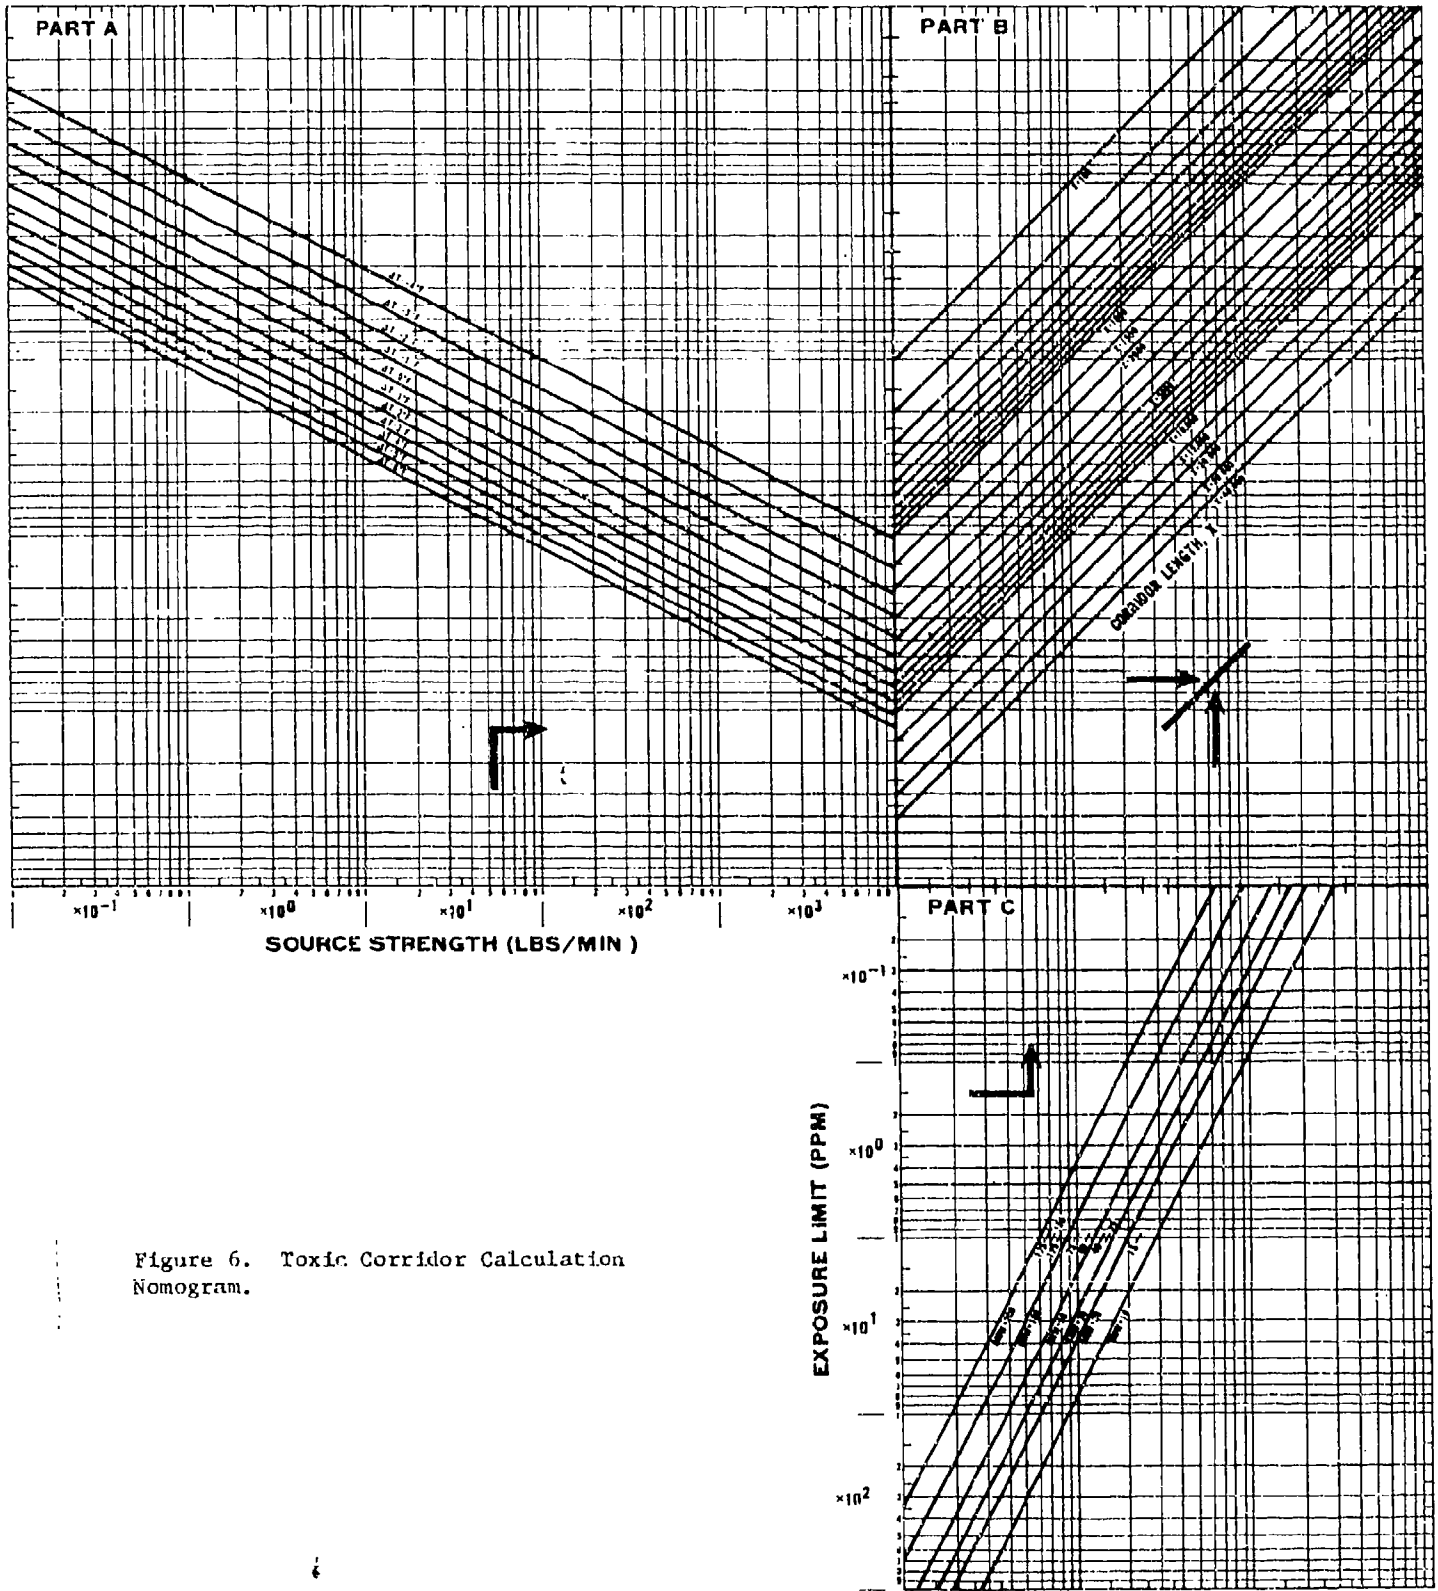


Figure 6. Toxic Corridor Calculation Nomogram.

Chapter 7

METHOD 4: PROGRAMMABLE CALCULATOR

The steps to determine the dimensions of a toxic corridor using this method are presented below. Where applicable, preferred and alternate approaches are given. Input values pertaining to the toxic chemical of concern may be either found in Table 33 or requested from your local Bioenvironmental Engineer (BEE). Following the list of steps is a listing of a TI-59 Calculator Program*, sample input/output, and procedures for making the toxic corridor length calculation. Two copies of a suggested worksheet are provided in Appendix A; one with sample corridor calculations (Figure A-1) and one blank copy (Figure A-2). A flow chart for using Method 4 is depicted in Figure 7.

a. STEP 1: Determine source strength (lb/min).

(1) Preferred. Obtain a source strength from the disaster response force (DRF). NOTE: Although weather personnel are not responsible for determining source strength, a toxic corridor length calculation cannot be made without it. Appendix C provides an equation for calculating evaporative source strengths based on the surface area covered by the toxic chemical spill. Use this Appendix to assist the agency responsible for estimating source strengths.

(2) Alternate. For small amounts of liquid or gaseous material (less than 2000 lb), assume the worst case which is total release of the material in 1 minute. For large amounts of a gas (2000 lb or more), assume total release over 5 minutes. For large amounts of liquid, assume a source strength of 2000 lb per minute.

(3) Alternate. For releases of a large amount of material where a source strength cannot be determined from the above procedures, go to the alternate procedure in Step 4.

b. STEP 2: Determine temperature difference (ΔT ($^{\circ}F$)).

(1) Preferred. Use the mean ΔT based on at least a 10-minute record from a 54-6 foot ΔT instrument. (Available at TITAN II missile sites. Refer to Appendix B, Figure B-1.) NOTE: 54-6 foot ΔT measurements can be made by using a sling psychrometer at the 54- and 6-foot levels of a radar tower.

(2) Alternate. Use mean surface wind speed category, solar elevation angle, and sky condition to obtain an estimated temperature difference from Table B-1, Appendix B. Refer to the notes in this table concerning rough terrain and forested regions prior to estimating the temperature difference.

c. STEP 3: Determine the gram molecular weight (GMW) and the appropriate exposure limit (normally a 30-minute SPEL) for the particular toxic chemical of concern.

(1) Preferred. Use Table 33 for these data.

(2) Alternate. If the exposure limit or GMW for the toxic chemical is not listed in Table 33, request this information from your local BEE.

d. STEP 4: Determine toxic corridor length (TCL) in feet.

(1) Preferred. Follow the "TI-59 User Instructions" for calculating the toxic corridor length.

(2) Alternate. For releases of a large amount of material where no source strength is available, use the distance the wind would carry the material in one hour. This is an interim forecast which must be updated when particulars are known.

*NOTE: The TI-59 program presented in this report was provided by Maj Lomax, a Staffmet at Det 10, 2WS, Eglin AFB FL. A more specialized TI-59 program was provided to Air Weather Service/Aerospace Sciences by another Staffmet, Capt Dargitz from Det 30, 2WS, Vandenberg AFB CA. Although Capt Dargitz's program is tailored for liquid missile fuels and may be somewhat site-specific, his approach is unique and may be of interest to others with similar interests or concerns.

e. STEP 5: Determine mean wind direction and wind direction variability, R (degrees of azimuth). If the surface wind is equal to or less than 3 knots, go to Step 7.

(1) Preferred. Use the 10-minute recorded wind direction trace and eliminate the two furthest direction fluctuations on each side of the mean. Variability, R, is the difference in degrees between the third largest fluctuation on each side of the mean direction.

(2) Alternate. Note the wind fluctuations indicated by an anemometer dial over a 2-minute period. Variability, R, is the difference in degrees between the largest fluctuation on each side of the mean direction.

(3) Approximate. If wind direction fluctuation information is unavailable assume R is 60° when the wind speed is between 4 and 10 knots; assume R is 30° when the wind speed is greater than 10 knots.

f. STEP 6: Determine corridor width (W) in degrees by multiplying the value obtained for R in Step 5 by 1.5.

g. STEP 7: Plot the toxic corridor.

(1) Wind speed greater than 3 knots. Draw the corridor center line from the source to the point on the wind direction circle corresponding to the direction the mean wind is blowing towards (i.e., 180 degrees from the recorded mean wind direction), as determined in Step 5. Place $W/2$, calculated in Step 6, on each side of the center line. Draw the lines which define each side of the corridor. See example worksheet, Figure A-1 in Appendix A.

(2) Wind speed equal to or less than 3 knots. The corridor is a circle of radius equal to the corridor length determined in Step 4.

h. STEP 8: Trend forecast. If significant changes in wind direction are expected within the next hour or two, include this information in your briefing. A change in direction that would affect evacuation is considered significant. Based on continued close monitoring of weather conditions, relay any significant changes in the toxic corridor forecast to the DRF. Consider changes in winds that have occurred between the time of the spill and the time of the forecast. These changes could alter the shape and size of the toxic corridor.

TI-59 User Instructions

This program may be used with or without the printer. (TI-59 Master Library Module must be installed.) It defaults to the 90-percent corridor length nonexceedance probability (Pr). This is the probability that the specified exposure limit will not be exceeded beyond the calculated corridor distance. This probability may be changed by changing the Percent Parameter (PPAR) which is the same as the probability factor (P) in the Ocean Breeze and Dry Gulch equation (see Glossary). The probability factors for specified nonexceedance probabilities are listed in Table 35. Once the PPAR is changed, it will remain at the new value until it is changed again or the program is reentered.

Table 35. Probability Factors (Miller and Miller, 1964).

<u>Probability of Not Being Exceeded</u>	<u>Distance Probability Factor (P)</u>
0.97	2.04
0.95	1.87
0.90	1.63
0.85	1.48
0.80	1.38
0.75	1.30
0.50	1.00
0.25	0.770
0.20	0.726
0.15	0.674
0.10	0.614
0.05	0.535

The procedures for entering the calculator program and calculating corridor lengths are listed below:

<u>STEP</u>	<u>PROCEDURE</u>	<u>ENTER</u>	<u>PRESS</u>	<u>DISPLAY</u>
1.	Turn on calculator (and printer)		CLR	
2.	Slide side one (1) into the lower slot			1.
3.			CLR	
4.	Turn card around and enter side three (3)			3.
5.	(Optional) Enter new PPAR	PPAR	A'	PPAR
6.	Enter gram molecular weight of chemical	GMW	A	GMW
7.	Enter exposure limit in PPM	PPM	B	PPM
8.	Enter source strength in lbs/min (Q)	Q	C	Q
9.	Enter delta-T value	DL-T	D	DL-T
10.	Compute corridor length (L)	No Entry	E	L in feet

Any of the entered parameters may be changed by reentering the new value, pressing the appropriate key (A-D), and then pressing E for the new corridor length.

The following sample input/output is useful for checking the program after it has been entered into the calculator memory.

```

32.05 GMW
20.   PPM
40.   Q
-2.   DL-T

```

```

CORRIDOR LENGTH
1414.869997 FEET
.2679678025 S. MI
.2328576534 N. MI
431.2523751 M
.4312523751 KM.

```

Sample Input/output

Default value of P=1.63 for probability of 90 percent that the calculated toxic corridor length will not be exceeded.

```

2.04 PPAR
CORRIDOR LENGTH
1770.757542 FEET
.3353707466 S. MI
.2914292104 N. MI
539.7268989 M.
.5397268989 KM.

```

Sample Input/output

Value of P altered from default value to 2.04 giving a probability of 97 percent that corridor length will not be exceeded.

The TI-59 program for calculating toxic corridor length is listed below.

TI-59 PROGRAM LISTING
BANK 1

STEP NO.	KEY PRESSED	KEY SYMBOL	STEP NO.	KEY PRESSED	KEY SYMBOL	STEP NO.	KEY PRESSED	KEY SYMBOL
000	76	LBL	052	42	STO	104	43	RCL
001	10	E'	053	39	39	105	23	23
002	69	OP	054	05	5	106	55	÷
003	00	00	055	09	9	107	43	RCL
004	92	RTN	056	71	SBR	108	21	21
005	76	LBL	057	23	LNx	109	55	÷
006	19	D'	058	91	R/S	110	43	RCL
007	42	STO	059	76	LBL	111	22	22
008	09	09	060	11	A	112	54)
009	73	RC*	061	42	STO	113	45	Y*
010	09	09	062	21	21	114	43	RCL
011	76	LBL	063	04	4	115	35	35
012	18	C'	064	01	1	116	65	X
013	69	OP	065	71	SBR	117	53	(
014	04	04	066	23	LNx	118	43	RCL
015	92	RTN	067	91	R/S	119	24	24
016	76	LBL	068	76	LBL	120	85	+
017	17	B'	069	12	B	121	01	1
018	42	STO	070	42	STO	122	00	0
019	08	08	071	22	22	123	54)
020	04	4	072	04	4	124	45	Y*
021	42	STO	073	02	2	125	43	RCL
022	09	09	074	61	GTO	126	37	37
023	76	LBL	075	23	LNx	127	95	=
024	22	INV	076	76	LBL	128	42	STO
025	73	RC*	077	13	C	129	25	25
026	08	08	078	42	STO	130	36	PGM
027	84	OP*	079	23	23	131	24	24
028	09	09	080	04	4	132	12	B
029	69	OP	081	03	3	133	42	STO
030	38	38	082	61	GTO	134	28	28
031	97	DSZ	083	23	LNx	135	55	÷
032	09	09	084	76	LBL	136	43	RCL
033	22	INV	085	14	D	137	50	50
034	69	OP	086	42	STO	138	95	=
035	05	05	087	24	24	139	42	STO
036	92	RTN	088	04	4	140	29	29
037	76	LBL	089	04	4	141	36	PGM
038	23	LNx	090	61	GTO	142	24	24
039	19	D'	091	23	LNx	143	19	D'
040	02	2	092	76	LBL	144	42	STO
041	00	0	093	15	E	145	26	26
042	22	INV	094	43	RCL	146	36	PGM
043	44	SUM	095	39	39	147	24	24
044	09	09	096	65	X	148	15	E
045	73	RC*	097	43	RCL	149	42	STO
046	09	09	098	34	34	150	27	27
047	69	OP	099	65	X	151	05	5
048	06	06	100	53	(152	04	4
049	92	RTN	101	43	RCL	153	17	B'
050	76	LBL	102	36	36	154	05	5
051	16	A'	103	65	X	155	42	STO

Bank 2

<u>STEP NO.</u>	<u>KEY PRESSED</u>	<u>KEY SYMBOL</u>	<u>STEP NO.</u>	<u>KEY PRESSED</u>	<u>KEY SYMBOL</u>
156	07	07	166	02	2
157	04	4	167	01	1
158	05	5	168	95	=
159	76	LBL	169	97	DSZ
160	24	CE	170	07	07
161	71	SBR	171	24	CE
162	23	LNK	172	98	ADV
163	43	RCL	173	43	RCL
164	09	09	174	25	25
165	85	+	175	91	R/S

BANK 3

<u>STORED VALUE</u>	<u>LOCATION</u>	<u>STEP NO.</u>	<u>KEY PRESSED</u>	<u>KEY SYMBOL</u>
0.	30	001	10	E'
0.	31	006	19	D'
0.	32	012	18	C'
0.	33	017	17	B'
3.28	34	024	22	INV
0.513	35	038	23	LNK
29.75	36	051	16	A'
2.53	37	060	11	A
0.	38	069	12	B
1.63	39	077	13	C
0.	40	085	14	D
22304300.	41	093	15	E
33333000.	42	160	24	CE
34000000.	43			
16272037	44			
21171737.	45			
36403024.	46			
31403024.	47			
30400000.	48			
26304000.	49			
1000.	50			
153235.	51			
3524163235.	52			
27173122.	53			
3723000000.	54			
1532312124.	55			
1617311517.	56			
24313717.	57			
3542132740	58			
33331335.	59			

**TOXIC CORRIDOR CALCULATIONS
USING METHOD 4**

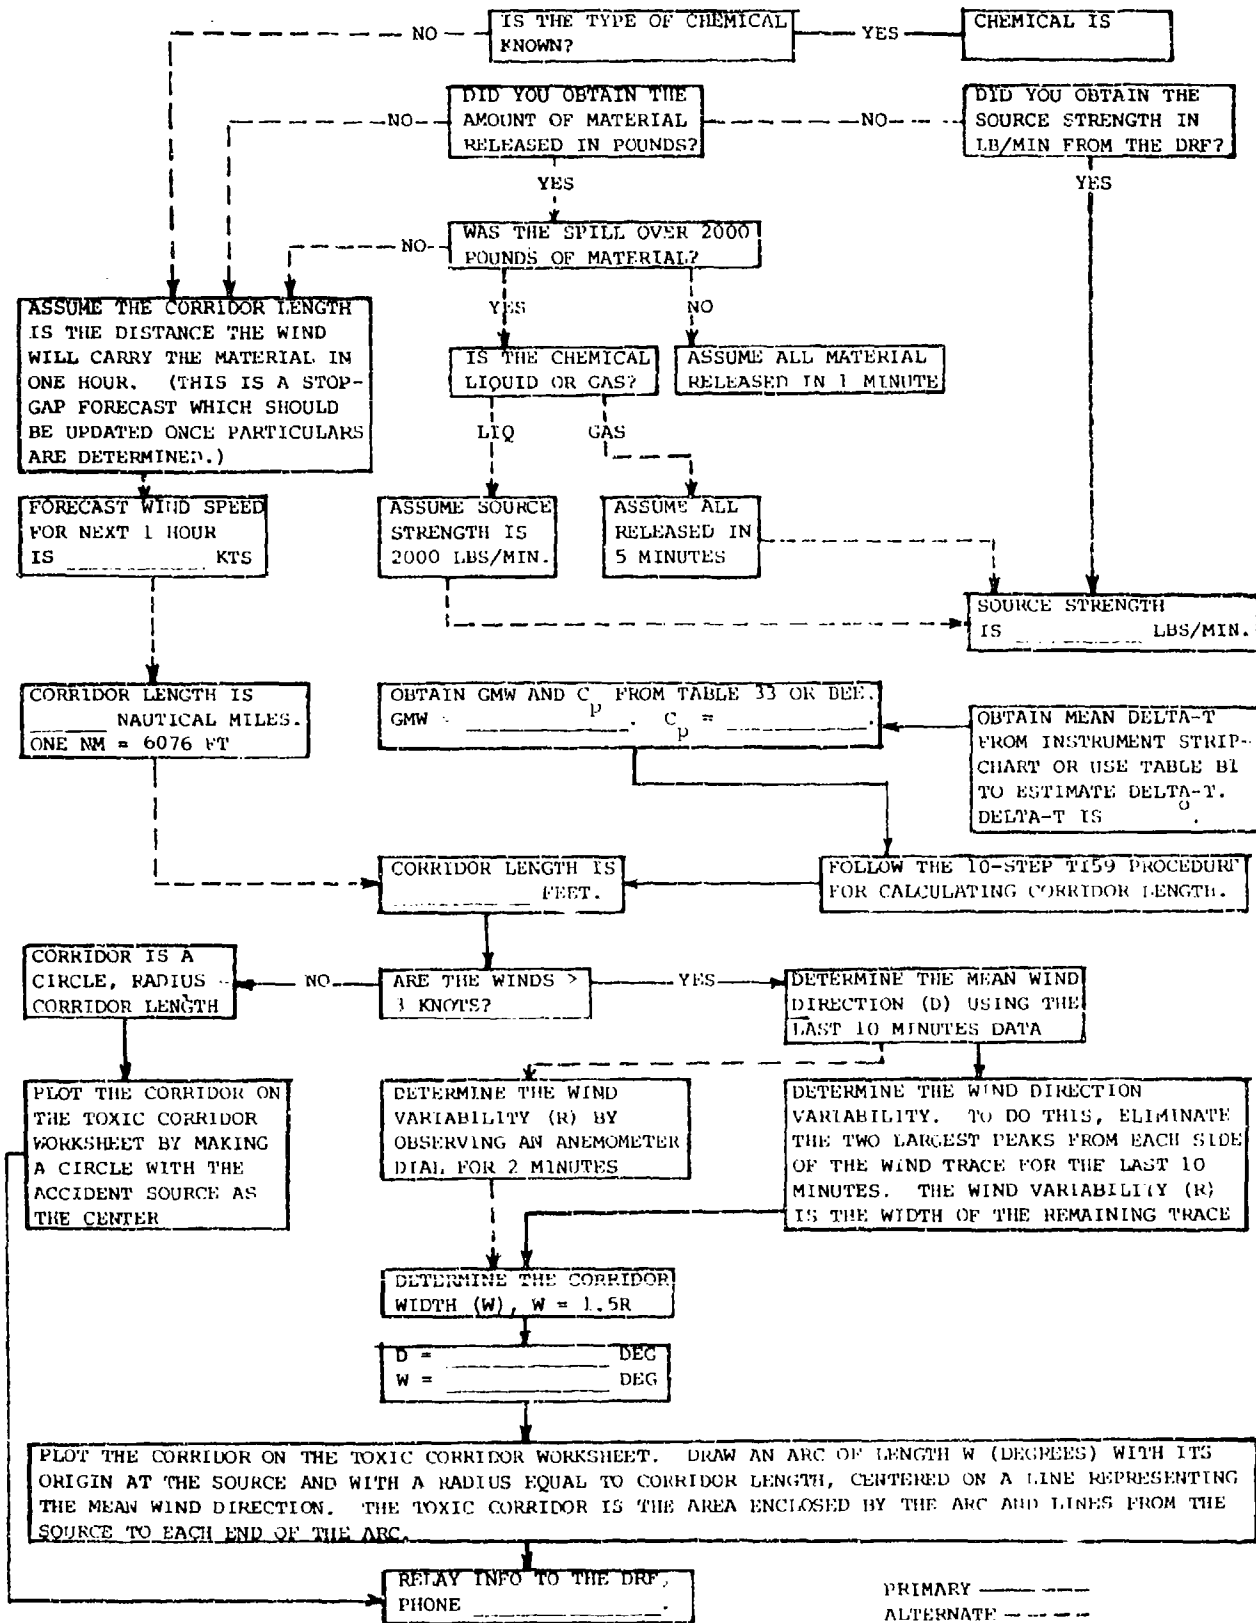


Figure 7. Flow Chart for Method 4.

Bank 2

<u>STEP NO.</u>	<u>KEY PRESSED</u>	<u>KEY SYMBOL</u>	<u>STEP NO.</u>	<u>KEY PRESSED</u>	<u>KEY SYMBOL</u>
156	07	07	166	02	2
157	04	4	167	01	1
158	05	5	168	95	=
159	76	LBL	169	97	DSZ
160	24	CE	170	07	07
161	71	SBR	171	24	CE
162	23	LNK	172	98	ADV
163	43	RCL	173	43	RCL
164	09	09	174	25	25
165	85	+	175	91	R/S

BANK 3

LABELS

<u>STORED VALUE</u>	<u>LOCATION</u>	<u>STEP NO.</u>	<u>KEY PRESSED</u>	<u>KEY SYMBOL</u>
0.	30	001	10	E'
0.	31	006	19	D'
0.	32	012	18	C'
0.	33	017	17	B'
3.28	34	024	22	INV
0.513	35	038	23	LNK
29.75	36	051	16	A'
2.53	37	060	11	A
0.	38	069	12	B
1.63	39	077	13	C
0.	40	085	14	D
22304300.	41	093	15	E
33333000.	42	160	24	CE
34000000.	43			
16272037	44			
21171737.	45			
36403024.	46			
31403024.	47			
30400000.	48			
26304000.	49			
1000.	50			
153235.	51			
3524163235.	52			
27173122.	53			
3723000000.	54			
1532312124.	55			
1617311517.	56			
24313717.	57			
3542132740	58			
33331335.	59			

**TOXIC CORRIDOR CALCULATIONS
USING METHOD 4**

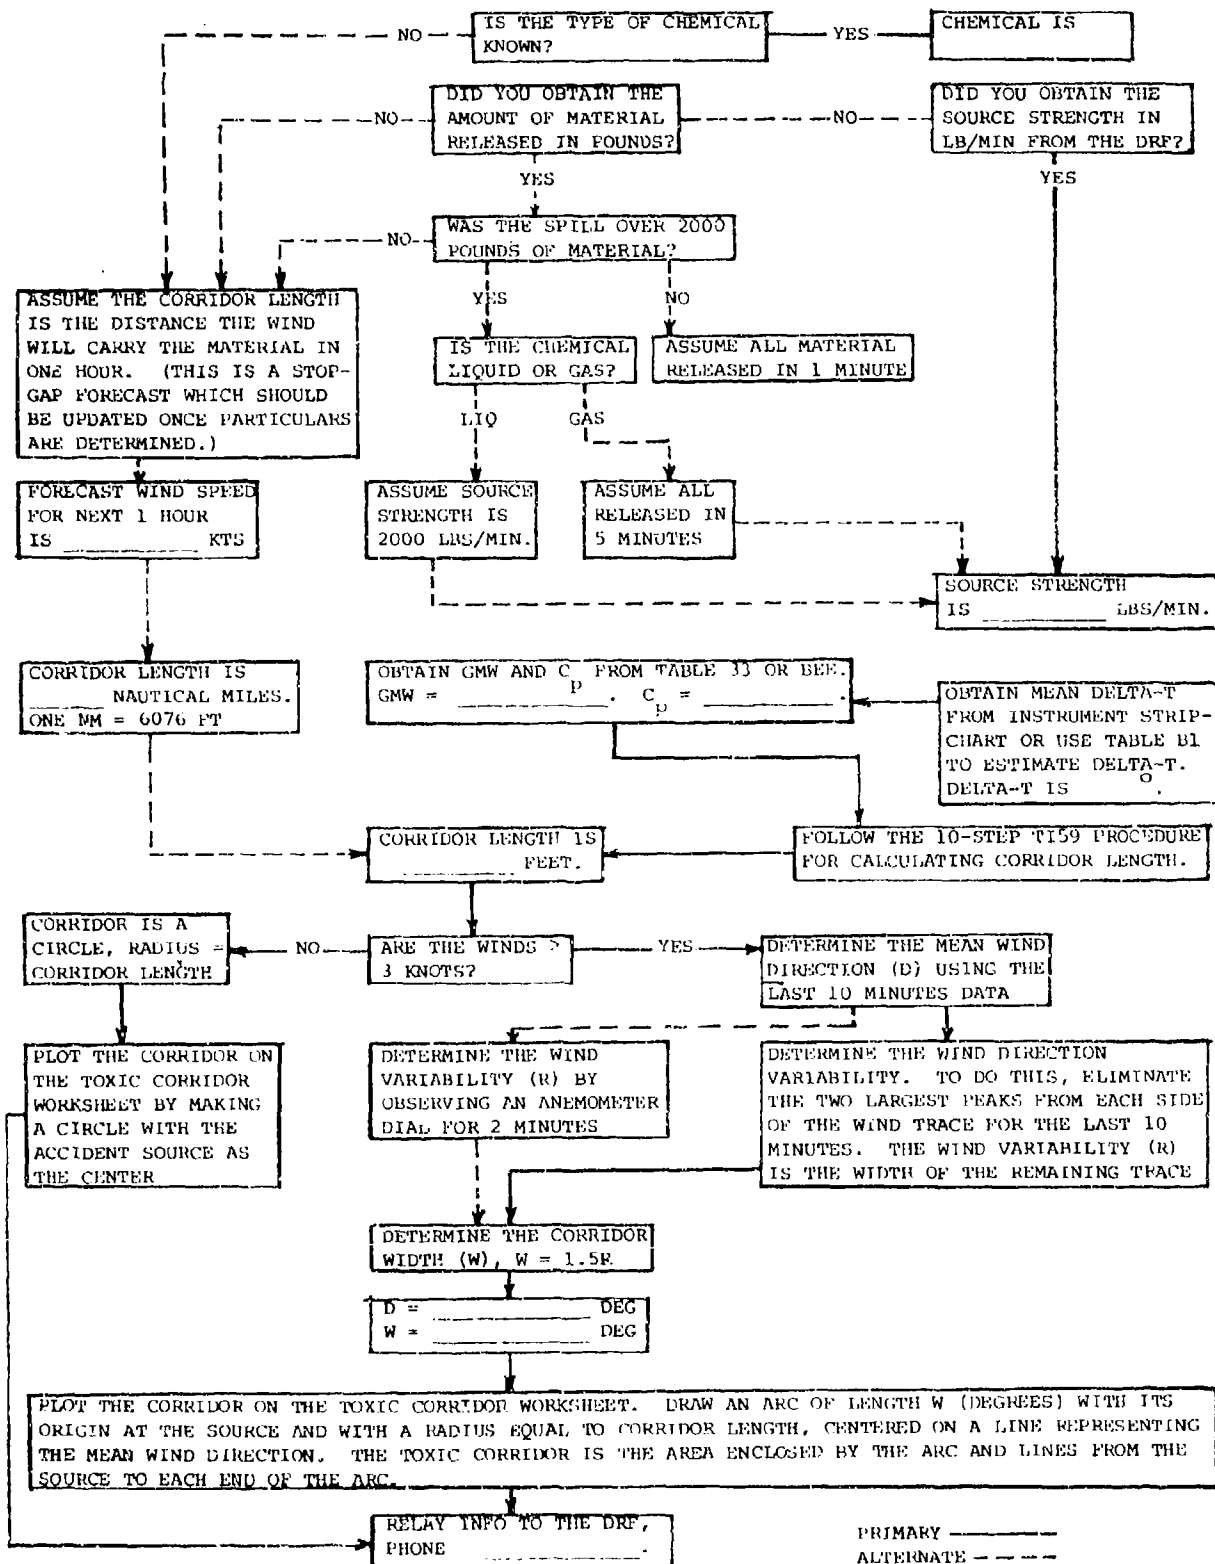


Figure 7. Flow Chart for Method 4.

Chapter 8

SUMMARY

Toxic chemicals are routinely shipped by rail, barge, and truck within and near populated areas. They are stored at Department of Defense (DOD) installations and in the surrounding civilian communities and are used in many tasks. Movement, use, and storage of these chemicals creates the risk of accidental spills or releases of these chemicals to the atmosphere. When this happens, they could rapidly become a health hazard.

This report has presented four methods based upon the Ocean Breeze and Dry Gulch equation that can be used by weather forecasters in producing rapid estimates of the diffusion of these toxic chemicals. The end product is a toxic corridor forecast for which there is a 90-percent probability that toxic chemical concentrations exceeding a specified value will be contained within the corridor. This concentration level will normally be a Short-Term Public Emergency Limit established by the Committee on Toxicology of the National Academy of Sciences (1979).

The four approaches for producing toxic corridor length forecasts are:

- a. Use toxic corridor tables to estimate the corridor length based on a delta-T value and a source strength. Each chemical requires a separate table.
- b. Use a table and graph to separate the diffusion equation into a diffusion factor and a chemical factor. The corridor length is the product of this pair of factors.
- c. Use a nomogram to calculate corridor length based on the gram molecular weight of the chemical, source strength, exposure limit, and delta-T.
- d. Use a programmable calculator to calculate corridor length.

The procedure for estimating the corridor width is the same in each approach. Step-by-step instructions direct the forecaster in producing the forecasts. A complete, separate set of instructions for each of the four approaches (called methods 1, 2, 3, and 4) is included. Table 36 summarizes the four methods. Additional information is provided in the appendixes to this report.

The toxic corridor forecast produced by each of these techniques is an approximate solution subject to several errors. These errors include:

- a. Errors caused by an error in the measurement of delta-T.
- b. Errors caused by an error in estimating source strength.
- c. Terrain-induced errors that alter the diffusion characteristics of the atmosphere.

In general, this report is intended to aid the forecaster by allowing flexibility in producing toxic corridor diffusion forecasts.

Table 36. Summary of Four Toxic Corridor Methods.

METHOD	PROCEDURE	MATERIALS REQUIRED	DATA REQUIRED	LIMITATIONS
1	<ol style="list-style-type: none"> 1. Estimate toxic corridor length (TCL) from toxic corridor length tables. 2. Calculate toxic corridor width (W) from wind direction variability (R). 3. Plot toxic corridor. 	<ol style="list-style-type: none"> 1. Toxic corridor length tables (Tables 2-32). 2. Toxic corridor worksheet (optional). 	<ol style="list-style-type: none"> 1. Source strength (Q, lb/min) from Disaster Response Force (DRF) and Appendix C 2. 54-6 foot temperature difference (delta-T, °F) 3. Mean wind direction (°) 4. Wind direction variability (R, degrees) 5. Wind speed (knots) 	<ol style="list-style-type: none"> 1. A 10% error in delta-T can cause an error in toxic corridor length (TCL) as large as 40 percent (see Appendix D). 2. Errors in Q of ±20 percent can cause errors of ±10 percent in TCL (see Appendix C). 3. Terrain and surface roughness can affect atmospheric dispersion and wind direction and speed (see Table B-1). 4. Meteorological elements are assumed to be homogeneous in horizontal.
2	<ol style="list-style-type: none"> 1. Separate diffusion equation into diffusion factor (DF) and chemical factor (CF) using tables and graphs. 2. Calculate toxic corridor length (TCL) from product of DF and CF. 3. Calculate toxic corridor width (W) from wind direction variability (R). 4. Plot toxic corridor. 	<ol style="list-style-type: none"> 1. Table of Chemical Factors (Table 33), or Nomogram for Determining Chemical Factors (Figure 3). 2. Table of Diffusion Factors (Table 34) or Nomogram for Determining Diffusion Factors (Figure 4). 3. Toxic corridor worksheet (optional). 	<ol style="list-style-type: none"> 1. Source strength (Q, lb/min) 2. 54-6 foot temperature difference (delta-T, °F) 3. Exposure limit (C_p) 4. Gram molecular weight (GMW) of chemical 5. Mean wind direction (°) 6. Wind direction variability (R, degrees) 7. Wind speed (knots) 	
3	<ol style="list-style-type: none"> 1. Obtain toxic corridor length (TCL) from universal nomogram. 2. Calculate toxic corridor width (W) from wind direction variability (R). 3. Plot toxic corridor. 	<ol style="list-style-type: none"> 1. Universal nomogram (Figure 6). 2. Toxic corridor worksheet (optional). 	<ol style="list-style-type: none"> 1. Source strength (Q, lb/min) 2. 54-6 foot temperature difference (delta-T, °F) 3. Exposure limit (C_p) 4. Gram molecular weight (GMW) of chemical 5. Mean wind direction (°) 6. Wind direction variability (R, degrees) 7. Wind speed (knots) 	
4	<ol style="list-style-type: none"> 1. Calculate toxic corridor length (TCL) using TI-59 programmable calculator with TCL program. 2. Calculate toxic corridor width (W) from wind direction variability (R). 3. Plot toxic corridor. 	<ol style="list-style-type: none"> 1. TI-59 programmable calculator. 2. Toxic corridor length program card. 3. Toxic corridor worksheet (optional). 	<ol style="list-style-type: none"> 1. Source strength (Q, lb/min) 2. 54-6 foot temperature difference (delta-T, °F) 3. Exposure limit (C_p) 4. Gram molecular weight (GMW) of chemical 5. Mean wind direction (°) 6. Wind direction variability (R, degrees) 7. Wind speed (knots) 	

REFERENCES

- Beals, Gordon A., 1971: Guide to Local Diffusion of Air Pollutants. AWS TR 214, May 1971, 85 p.
- Committee on Toxicology, 1979: Criteria for Short-Term Exposure to Air Pollutants. NAS/ACT/P-885 under Contract No. 0014-79-C-0049, Board on Toxicology and Environmental Health Hazards, Assembly of Life Science, National Research Council, National Academy of Sciences, Washington DC, November 1979, 22 p. (AD-A087853).
- Eidsvik, K. J., 1978: Dispersion of Heavy Gas Clouds in the Atmosphere. OR NR. 32/78, Norwegian Institute for Air Research, PO Box 130, 2001 Lillestrom, Norway (September 1978).
- Haugen, D. A. and J. J. Fuquay, eds., 1963: The Ocean Breeze and Dry Gulch Diffusion Programs, Vol. I. AFCRL Research Report, AFCRL, Bedford, Massachusetts, 1963.
- Haugen, D. A. and J. H. Taylor, eds., 1963: The Ocean Breeze and Dry Gulch Diffusion Programs, Vol. I. AFCRL Research Report, AFCRL, Bedford, Massachusetts, 1963.
- Johnson, Morris C. (Editor), 1980: Methodology for Chemical Hazard Prediction. Technical Paper No. 10, Change 3, Department of Defense Explosives Safety Board, Alexandria, Virginia, June 1980, 78 p. (AD-A086820).
- Miller, R. L. and F. H. Miller, 1964: Diffusion Forecasting for TITAN II Operations. AWS TR 176, Air Weather Service, Scott AFB, Illinois, 10 February 1964, 31 p.
- Nou, J. V., 1963: Development of the Diffusion Prediction Equation. In: The Ocean Breeze and Dry Gulch Diffusion Program, Vol. II, AFCRL Research Report, AFCRL, Bedford, Massachusetts, 1963, pp. 1-20.
- Strategic Air Command Regulation 355-5: "TITAN II-Hazard Corridor Planning and Evacuation Notification Procedures." 30 September 1980.
- Taylor, J. H., 1963: Operational Use of Wind Systems. In: The Ocean Breeze and Dry Gulch Diffusion Programs, Vol. II, AFCRL Research Report, AFCRL, Bedford, Massachusetts, 1963, pp. 49-73.
- van Ulden, A. P., 1974: On the Spreading of a Heavy Gas Released Near the Ground. 1st International Loss Prevention Symposium, The Hague/Delft, Netherlands, 28-30 May 1974, Amsterdam, Elsevier (1974).

Appendix A

TOXIC CORRIDOR WORKSHEET
WORKSHEET WITH EXAMPLE

Name of Chemical Aerozine 50

1. Source strength 40 lbs/min (from environmental health service, disaster response force, or estimated)
2. 54-6 foot delta-T -2 °F (from instrument or table)
3. Toxic Corridor length 1415 feet (from toxic corridor table)
4. Mean surface wind 290°/4 kt; wind variability (R) 40 degrees (from wind trace, instrument dial, or estimated)
5. Corridor width (W) 60 degrees (W = 1.5R)
6. Toxic corridor plot
7. Surface wind trend forecast no change change to °/ kt)

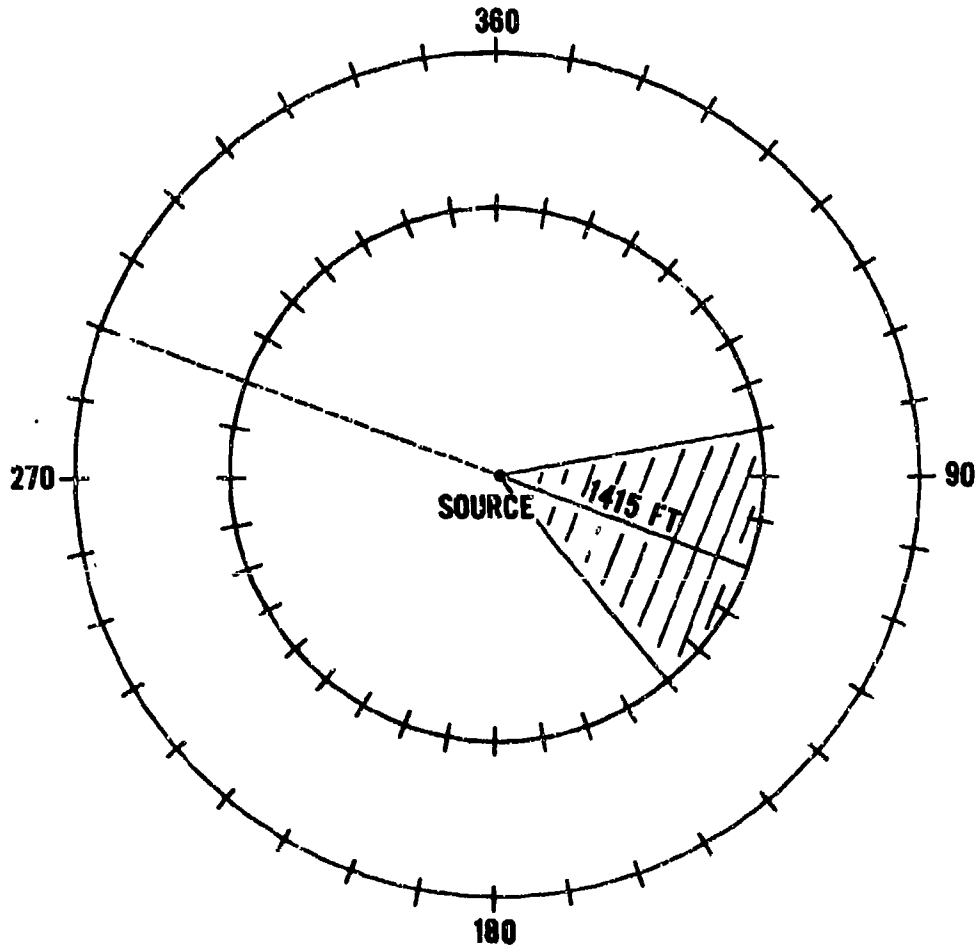


Figure A-1. Toxic Corridor Forecast Worksheet with Example Calculations.

TOXIC CORRIDOR WORKSHEET

Name of Chemical _____

1. Source strength _____ lbs/min (from environmental health service, disaster response force, or estimated)
2. 54-6 foot delta-T _____ °F (from instrument or table)
3. Toxic Corridor length _____ feet (from toxic corridor table)
4. Mean surface wind _____; wind variability (R) _____ degrees (from wind trace, instrument dial, or estimated)
5. Corridor width (W) _____ degrees (W = 1.5R)
6. Toxic corridor plot
7. Surface wind trend forecast no change/change to °/ kt)

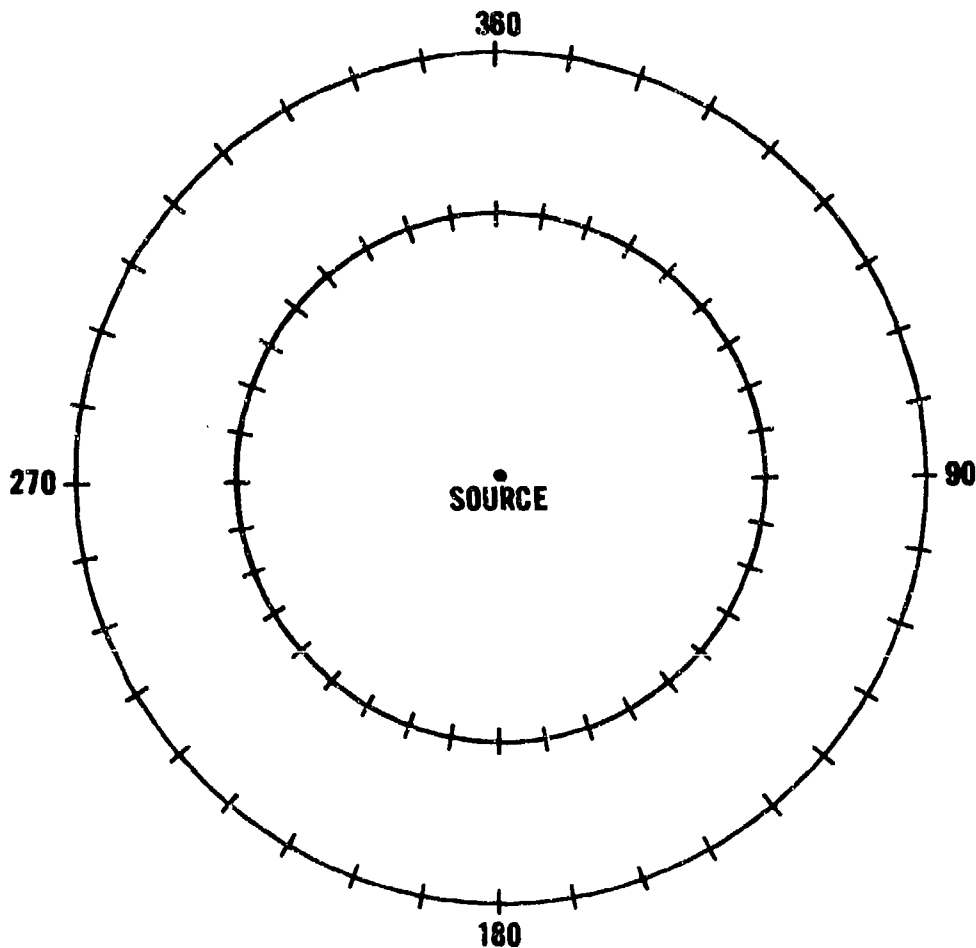


Figure A-2. Toxic Corridor Forecast Worksheet.

Appendix B

PROCEDURES FOR DETERMINING METEOROLOGICAL ELEMENTS

The mean 10-minute wind speed or direction is determined directly from the chart trace by adjusting the position of a straightedge held parallel to the chart edge, until there is an equal amount of the trace on both sides of the straightedge. The mean wind speed or direction is the value intersected by the straightedge. Direction should be rounded to the nearest 5° and speed to the nearest 1 knot.


Where delta-T instrumentation is available, the mean 10-minute delta-T (54-6 ft) for a particular time period is determined in exactly the same manner given above, using the strip chart recording of delta-T instead of the wind record.

The range of the wind direction fluctuation (R) is obtained by subtracting the two largest fluctuation "peaks" from each side of the wind direction trace and measuring the width in degrees of the remaining trace. This can be done by moving a straightedge, held parallel to the chart edge, toward the center of the trace. After three peaks show, read the direction and round to the nearest 5°. Repeat the operation for the other side of the trace and record the difference in degrees between the two readings.


When the wind direction is oscillating about North, first one pen will trace and then the other, resulting in a trace on both sides of the chart. The method for computing R with such a trace is essentially the same as given above except that the straightedge is moved from the center of the chart outward toward each edge and the difference in readings should be subtracted from 360° to get the width of the trace. Several sample traces illustrating the procedures for obtaining the meteorological elements are given in Figures B-1 and B-2 extracted from AWSTR 176 "Diffusion Forecasting for TITAN II Operations" (Miller and Miller, 1964). Note that these examples are for a 30-minute time interval.

Table B-1 should be used to estimate temperature difference, 54-6 foot delta-T, if instrumental data are not available. An example is included in the table. Pay special attention to the notes concerning rough and forested terrain.

TEMPERATURE DIFFERENCE (54-6)

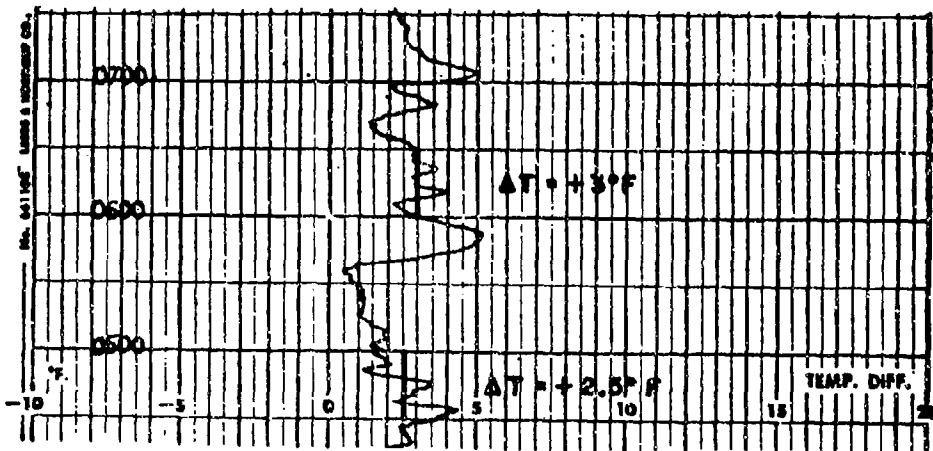

(a)

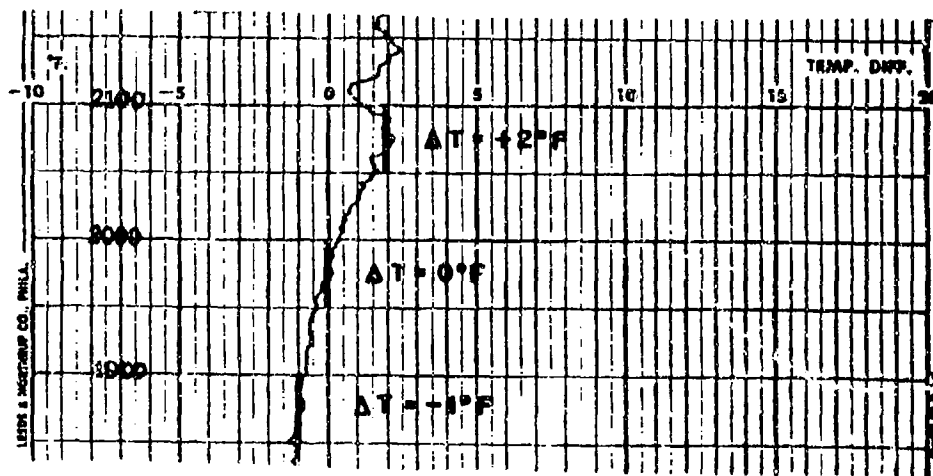

(b)

Figure B-1. Sample Traces of Temperature/Difference (ΔT).

WIND SPEED AND DIRECTION (12')



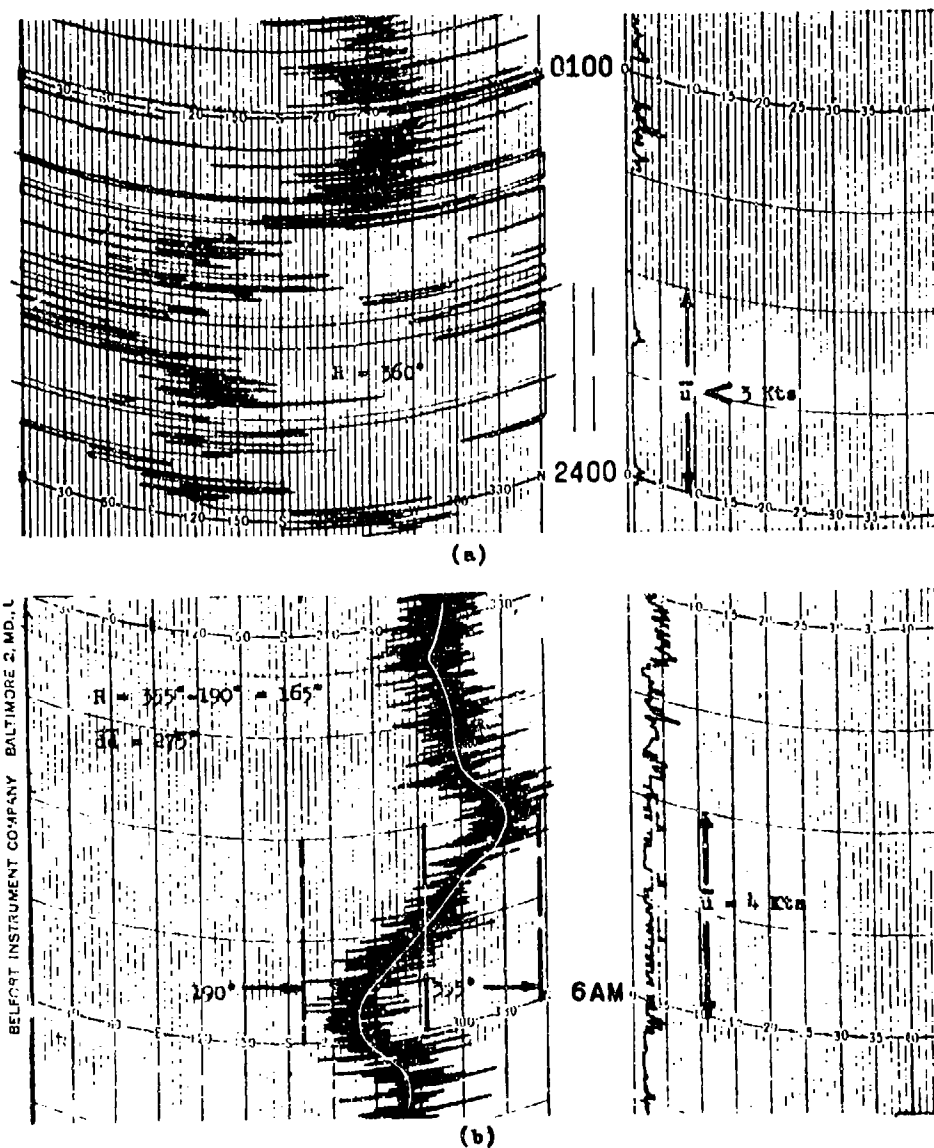


Figure B-2. Sample Traces of Wind Direction and Speed.

WIND SPEED AND DIRECTION (12')

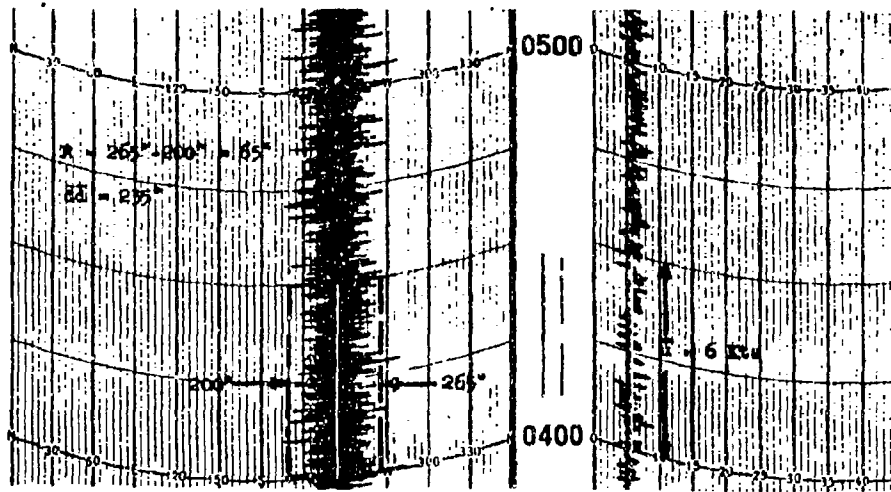

(c)

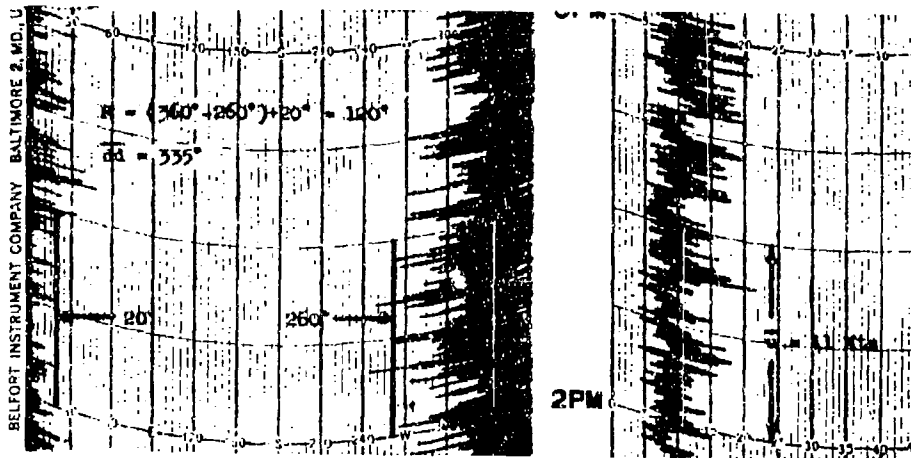

(d)

Figure B-2 (cont'd). Sample Traces of Wind Direction and Speed.

Table B-1. Estimation of Temperature Difference, °F (54-6 ft ΔT). Before using this table refer to notes and example.

SURFACE WIND SPEED (kt)	DAY										NIGHT					
	INCOMING SOLAR RADIATION (SOLAR ELEVATION ANGLE)										CLEAR		CLOUD COVER 1/8-3/8		CLOUD COVER 4/8-8/8	
	STRONG (> 60)	MODERATE (36-60°)	WEAK (16-35°)	SUNRISE/SUNSET (≤ 15°)							NO SNOW	SNOW	NO SNOW	SNOW	NO SNOW	SNOW
≤ 3	-2	-1	-1	0	0	0	0	0	0	0	6	5	5	4	4	3
4-6	-3	-2	-2	0	0	0	0	0	0	0	6	5	5	4	4	3
7-10	-3	-2	-1	0	0	0	0	0	0	0	5	4	4	3	3	2
≥ 11	-2	-1	-1	0	0	0	0	0	0	0	5	4	4	3	2	1
BROKEN CLOUDS ABV 7000 FT - A (>) EQUAL TO & BLO 7000 FT - B (≤)																
	A	B	A	B	A	B	A	B	A	B						
≤ 3	-1	-1	-1	-1	0	0	0	0	0	0						
4-6	-2	-2	-2	-2	0	0	0	0	0	0						
7-10	-2	-1	-1	-1	0	0	0	0	0	0						
≥ 11	-1	-1	-1	-1	0	0	0	0	0	0						
OVERCAST CLOUDS																
≤ 3	-1	0	-1	0	-1	0	0	0	0	0						
4-6	-2	0	-2	0	-2	0	0	0	0	0						
7-10	-1	0	-1	0	-1	0	0	0	0	0						
≥ 11	-1	0	-1	0	-1	0	0	0	0	0						

Note 1. Use sunrise/sunset category during the period from one hour before to one hour after sunrise/sunset.

Note 2. In rough terrain add (-1) to the number determined.

Note 3. If the toxic corridor is in a forest, use the next lower wind speed category than normal (unless the wind measurement is from within the forest canopy) and add (-1) to the resulting delta-T value. Do not use a delta-T more negative than (-4).

Note 4. Major Robert G. Curry developed this table while assigned to 3WW/DN. It originally appeared in 3WWP 105-13 and more recently in AWSP 105-57.

Example: It is a sunny day with scattered middle clouds. The surface wind speed is five knots, and the approximate solar elevation is 40 degrees. Calculate the temperature difference. Enter the day side of the table at proper windspeed and solar elevation angle. The answer is a temperature difference of (-2).

Appendix C

TOXIC CHEMICAL SOURCE STRENGTH DETERMINATION

The determination of toxic chemical source strengths is not the responsibility of weather personnel. Unfortunately, a toxic corridor cannot be determined without this input. Accurate toxic corridor forecasts require that reasonably accurate parameters, such as source strength, be used as inputs upon which the calculation can be based. A source strength estimate that is an order of magnitude too small (i.e., 10 percent of the true value) will result in a Toxic Corridor Length (TCL) estimate that is approximately 30 percent of that resulting from the proper source strength input. A source strength estimate that is 75 percent of its true value will result in a TCL that is 86 percent of that resulting from the true input. Figure C-1 displays the relationship between erroneous source strength inputs and TCL errors.

Figure C-1 illustrates that corridor lengths will be within +10 percent of "true" as long as source strengths are within +20 percent of "true." Estimating source strengths resulting from spills of toxic chemicals is always an extremely difficult task. Virtually every spill incident presents a completely new set of conditions under which the source strengths must be determined. Because of the difficulty encountered in making these estimates, the Air Force Engineering and Services Center has studied the problem, and the equation shown below was one result of their studies (Clewell, 1980 and Ille, 1978).

$$Q = 0.08V^{3/4} A (1 + 4.3 \times 10^{-3} T_p^2) Z \quad (C-1)$$

where Q = source strength in kg/hr
 V = wind speed in m/s
 A = spill area in m²
 T_p = toxic chemical pool temperature in degrees Celsius
 Z = dimensionless factor that depends upon the toxic chemical under consideration.

The factor Z is calculated from molecular weights and vapor pressures of the toxic chemicals of concern. The equation for Z is

$$Z = \frac{P_{v_b} \text{ GMW}_b}{P_{v_h} \text{ GMW}_h}$$

where P_v is vapor pressure (subscripts b and h represent the toxic chemical of concern and hydrazine, respectively), and GMW is the gram molecular weight for the chemical of concern (subscript b) and for hydrazine (subscript h).

The source strength equation was developed in terms of hydrazine where Z represents a factor to be used in converting the equation for use with other toxic chemicals. It should be apparent that Z equals 1 when a source strength for hydrazine is required.

Except for temperature, which remains in degrees Celsius, the above equation has been converted to its equivalent in terms of English units. This was done to maintain a consistency of units throughout this report. The equation in terms of source strength in lb/min, with wind speed in knots, spill area in square feet, and pool temperature in degrees Celsius is

$$Q = 1.66 \times 10^{-4} v^{3/4} A (1 + 4.3 \times 10^{-3} T_p^2) Z$$

Table C-1 contains vapor pressures, gram molecular weights, and Z factors for a number of toxic chemicals.

REFERENCES

Clewell, Harvey J. III (Capt, USAF): "Estimation of Hazard Corridors for Toxic Liquid Spills." Paper presented at 1980 JANNAP Propulsion Meeting - Safety and Environmental Protection Specialist Session, Monterey, CA on 12 March 1980. (Based upon work performed at the Engineering and Services Laboratory, AF Engineering and Services Center, Tyndall AFB FL 32403.)

Ille, Gerhard and Charles Springer: "The Evaporation and Dispersion of Hydrazine Propellants from Ground Spills." CEEDO-TR-78-30, Civil and Environmental Engineering Development Office (presently the AF Engineering and Services Center), Tyndall AFB FL 32403 (August 1978).

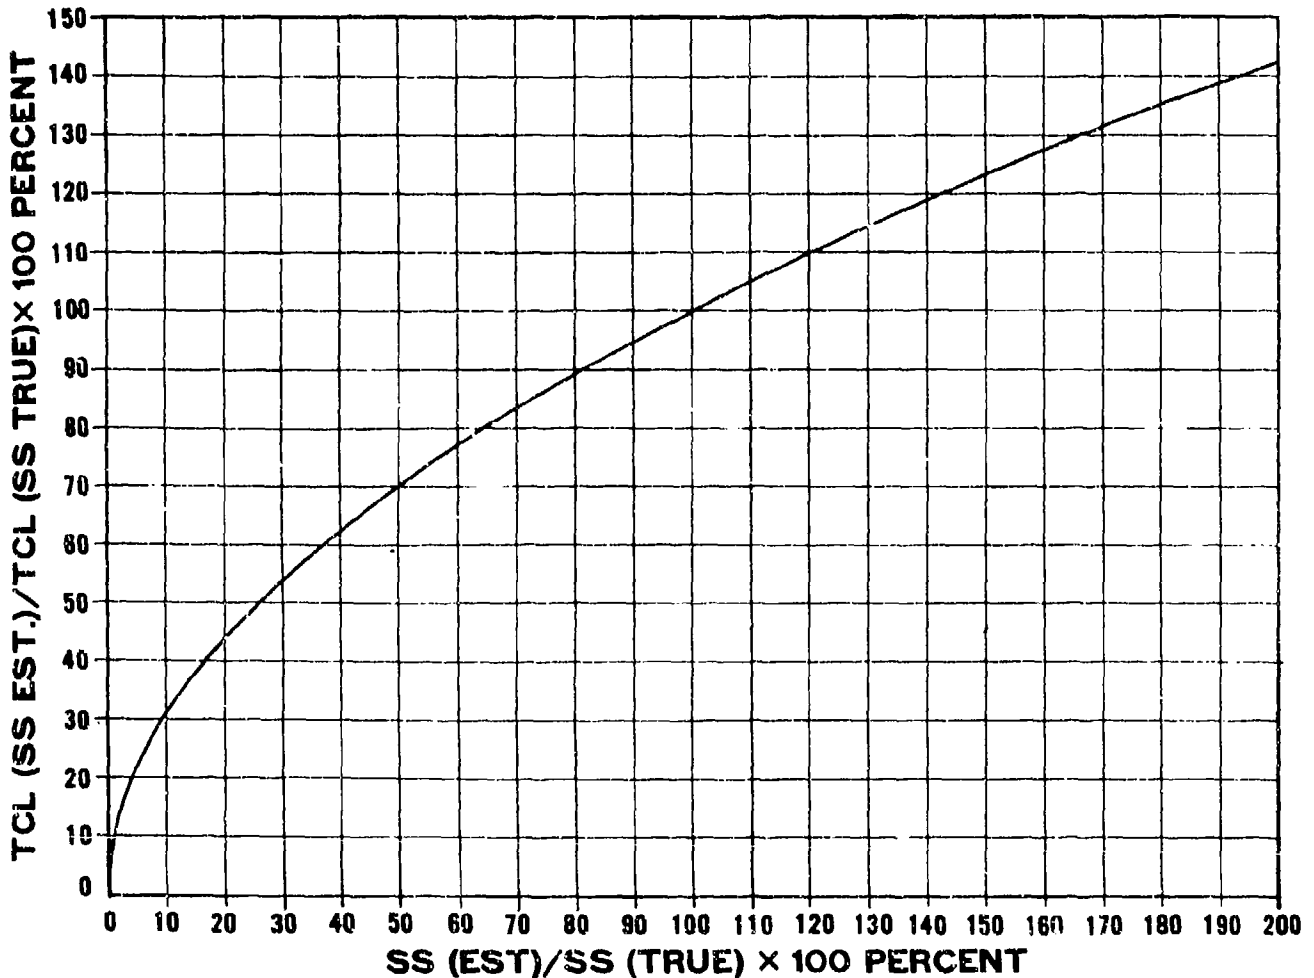


Figure C-1. Toxic Corridor Length Errors Resulting from Source Strength Estimation Errors.

Table C-1. Source Strength Factors (Z), GMW, and Vapor Pressures for Selected Toxic Chemicals.

TOXIC CHEMICAL	VAPOR PRESSURE				GMW	FORMULA	Z FACTOR	REMARKS
	psi	mb	in Hg	at temp °F				
Aerazine 50 (50% Hydrazine/50% UDMH)	3.1	213.7	6.3	80	53.0	$N_2H_4 / (CH_3)_2N_2H_2$	16.5	Mixed 50/50%
Anhydrous Ammonia	158.17	10,902	321.9	80	17.031	NH_3	270.7	
Aniline	0.027	1.861	0.555	80	93.129	$C_6H_5NH_2$	0.253	
Bromine Pentafluoride	8.487	584.97	17.27	80	174.896	BrF_5	149.2	
Carbon Disulfide	6.987	481.60	14.22	80	76.139	CS_2	53.5	
Carbon Monoxide					28.011	CO		
Chlorine	115.383	7,952.8	234.85	80	70.906	Cl_2	822.3	
Chlorine Pentafluoride	58.76	4,050.043	119.599	77	170.445	ClF_5	770.4	
Chlorine Trifluoride	26.6	1,833.410	54.141	80	92.448	ClF_3	247.2	
Diborane					16.859	B_2H_6		
Ethylene Oxide	27.0	1,860.98	54.96	80	44.054	C_2H_4O	119.6	
Fluorine					37.997	F_2		
FLOX					32.798	F_2/O_2		Mixed 30/70%
Fuming Nitric Acid - Types I & IA	1.21	83.4	2.46	77	63.013	HNO_3	7.7	WFNA/1WFNA
Fuming Nitric Acid - Types III, IIIA, IIIB	2.7	186.1	5.5	77	63.013	HNO_3	17.1	RFNA/IRFNA
Hydrazine	0.31	21.4	0.63	80	32.045	N_2H_4	1	
H-70 (70% Hydrazine/30% Water)					27.832	N_2H_4/H_2O	0.333	Mixed 70/30%
Hydrogen Chloride	808.79	55,746.0	1,646.2	80	36.461	HCl	2963.9	Pressurized Gas Only
Hydrogen Fluoride	18.70	1,288.94	36.06	80	20.006	HF	37.6	
Hydrogen Sulfide	326.6	22,509.0	664.7	80	34.080	H_2S	1118.6	
MAF 1, 3, & 4	(Z = 0.4, 0.2, and 0.6 for MAF 1, 3, and 4 respectively)							
Methylene Chloride	8.99	619.6	18.3	81	84.933	CH_2Cl_2	76.7	
Monomethylhydrazine (MMH)	1.0	68.9	2.04	80	46.072	CH_3NHNH_2	4.6	
Nitrogen Dioxide	15.70	1,082.35	31.96	80	46.006	NO_2	100.0	
Nitrogen Tetroxide	14.6	1,006.3	29.72	70	92.011	N_2O_4	135.0	
Oxygen Difluoride	4306.0	296,795.0	8,764.4	80	53.996	OF_2	23,769.2	Pressurized Gas Only
Perchloryl Fluoride	176.1	12,137.7	358.4	77	102.450	ClO_3F	1813.3	
Pentaborane	4.0	275.7	8.14	77	63.127	B_5H_9	25.4	
Sulfur Dioxide	55.03	3,793.6	112.03	80	64.063	SO_2	354.4	
Trichloroethylene	1.16	80.0	2.36	69.8	131.389	$CHClCCl_2$	15.3	
Trichlorotrifluoroethane	6.50	448.0	13.2	77	187.377	CCl_2FCClF_2	122.4	
Unsymmetrical Dimethylhydrazine (UDMH)	3.1	213.7	6.3	80	60.099	$(CH_3)_2N_2H_2$	18.7	
Nitrogen Trifluoride					71.002	NF_3		

Appendix D

TOXIC CORRIDOR LENGTH AS A FUNCTION OF TEMPERATURE DIFFERENCE ERRORS

Toxic corridor length calculations are quite sensitive to temperature difference (ΔT) values that are used. The sensitivity is greatest when the atmosphere is unstable, i.e., $\Delta T < 0$. The sensitivity decreases as ΔT increases. If the procedures for estimating ΔT are properly followed, any error should normally not be more than 1°F . If an error results when ΔT is estimated through use of Table B-1 in Appendix B, the error will most likely be in a positive sense, e.g., a "true" ΔT of 0°F might be estimated as $+1^\circ\text{F}$. For this reason, toxic corridor lengths will usually be on the conservative or safe side, i.e., the corridor lengths will be longer than necessary rather than shorter.

A positive 1°F error when the "true" ΔT is -3°F (i.e., ΔT estimated as -2°F) will result in a 40 percent overestimation of the corridor length. An error in the opposite sense, i.e., ΔT estimated as -4°F , will cause the same corridor length to be underestimated by 32 percent.

When the "true" ΔT is positive, corridor length errors are smaller for similar errors in estimating ΔT . Suppose the "true" ΔT is 6°F and the estimate is 5°F . The toxic corridor will be underestimated by 15 percent. Conversely, a 7°F estimate of ΔT would result in a corridor length that is too large by 17 percent.

Figure D-1 graphically displays the resulting toxic corridor error percentages as a function of "true" ΔT and the error (E) that might occur in estimates. The error (E) ranges from -3°F to $+3^\circ\text{F}$. An examination of the potential errors in toxic corridor lengths that might result from errors in estimating ΔT clearly signals the importance of using the best estimates of ΔT . Note that positive errors in ΔT may result in excessive evacuations of populated areas while negative ΔT errors could result in insufficient evacuations and a possibility of casualties in some nonevacuated areas.

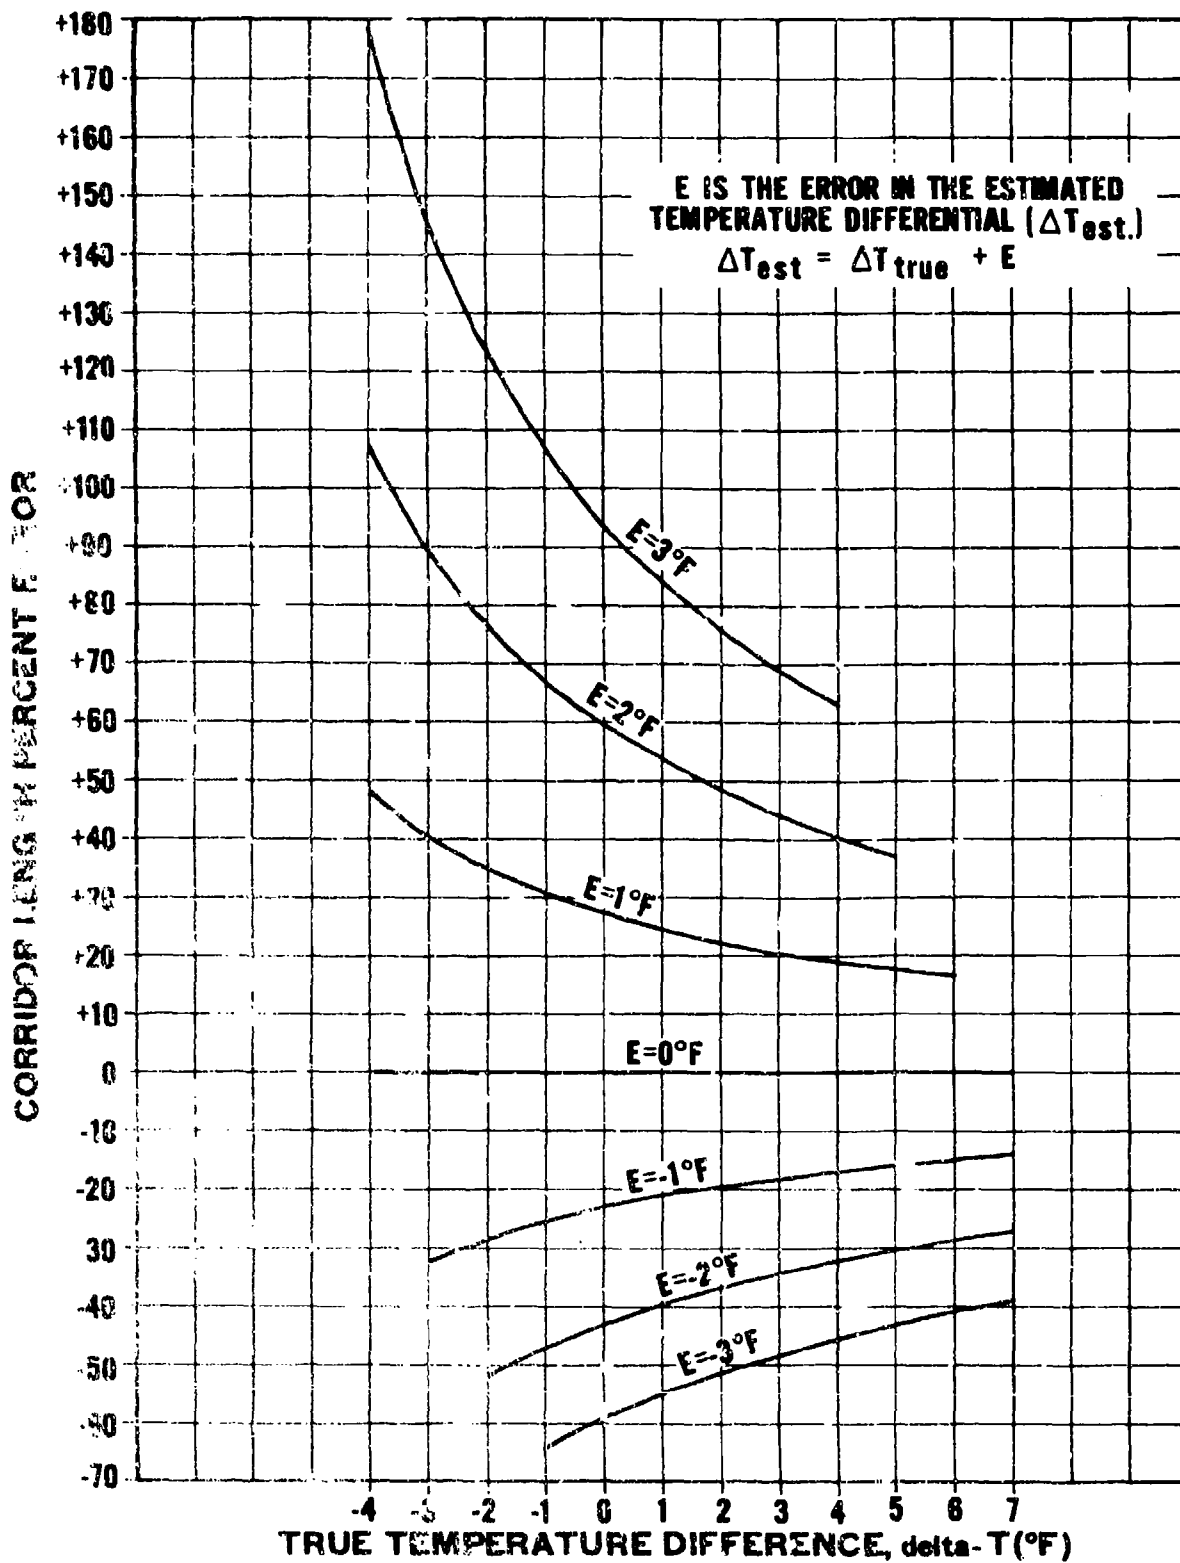


Figure D-1. Total Corridor Length Errors, Expressed in Percent, as a Function of Temperature Difference Errors.

EXAMPLE TOXIC CORRIDOR PROBLEMS

1. Situation: Spill of Anhydrous Ammonia

Spill Area: Unknown

Time of Day: Sunset

Sky: Clear

Ambient Air Temp: 30°C

Wind Speed/Direction: 6 kt/235 degrees; from Figure B-2(c)

Wind Variability (R): 65 degrees; from Figure B-2(c)

Delta-T: 0°F; from Table B-1

GMW: 17.03; from Table 33

Exposure Limit: 75 PPM; SPEL from Table 33

Source Strength: 1000 lb/min; estimated by DRF

TOXIC CORRIDOR LENGTH (FT) AND WIDTH (DEGREES)

	<u>Method 1</u>	<u>Method 2</u>	<u>Method 3</u>	<u>Method 4</u>
Length	9108	9143 (Table) 9360 (Figure)	9500	9108
Width (1.5R)	98°	98°	98°	98°

For Method 2: $CF = 0.78$ (Table 33 or Figure 3) $DF = 11,722$ (Table 34) $DF = 12,000$ (Figure 4) $X = CF \cdot DF$ 2. Situation: Spill of Aluminum Fluoride (AlF₃)

Spill Area: Unknown

Time of Day: Midnight

Sky: Clear (no snow on ground)

Ambient Air Temp: 20°C

Wind Speed/Direction: 6 kt/235 degrees; from Figure B-2(c)

Wind Variability (R): 65 degrees; from Figure B-2(c)

Delta-T: 5°F; from Table B-1

GMW: 83.98; from BEE

Exposure Limit: 10 mg/m³* 30-min Emergency Exposure Limit (No SPEL exists); from BEE

Source Strength: 100 lb/min; from DRF

* 10 mg/m³ converts to 2.9 PPM by volume. See "Exposure Limit" in Glossary for conversion procedures.

TOXIC CORRIDOR LENGTH (FT) AND WIDTH (DEGREES)

	<u>Method 1</u>	<u>Method 2</u>	<u>Method 3</u>	<u>Method 4</u>
Length	No Table	18,264 (Table) 18,300 (Figure)	18,000 (Figure 6)	18,246
Width (1.5R)	98°	98°	98°	98°

For Method 2: CF = 1.83 (Figure 3)
CF = 1.82 (Equation)
DF = 10,035 (Table 34)
DF = 10,000 (Figure 4)
X = CF · DF

3. Situation: Spill of Hydrazine

Spill Area: 4000 feet²

Time of Day: Sunrise

Sky: Clear

Ambient Air Temp: 24°C

Wind Speed/Direction: 11 kt/335 degrees

Wind Variability (R): 120 degrees; from Figure B-2(d)

Delta-T: 0°F

GMW: 32.045

Exposure Limit: 20 PPM; SPEL from Table 33

Source Strength: 14 lb/min; from Appendix C

TOXIC CORRIDOR LENGTH (FT) AND WIDTH (DEGREES)

	<u>Method 1</u>	<u>Method 2</u>	<u>Method 3</u>	<u>Method 4</u>
Length	1504	1510 (Table) 1430 (Figure)	1400	1452
Width (1.5R)	180°	180°	180°	180°

For Method 2: CF = 1.1; Figure 3
CF = 1.11; Table 33
DF = 1360; Table 34
DF = 1300; Figure 4
X = CF · DF

Appendix F

SPECIAL TOXIC CORRIDOR TABLES FOR TITAN II SITES

This appendix contains additional Toxic Corridor Tables for use with Method 1. They have been included because of special requirements for multi types of hazard corridors at TITAN II missile sites. Note that tables based upon 10-, 30-, and 60-minute Short-Term Public Emergency Limit (SPEL) have been provided for Nitrogen Tetroxide, Hydrazine, and UDMH. Also the 10-minute Short-Term Public Limit (STPL) was used to produce tables for Nitrogen Tetroxide and UDMH. These tables are also contained in SACR 355-5.

Table P-1. Hydrazine TCL Table (TITAN - Emergencies).

HAZARD CORRIDOR LENGTHS IN FEET FOR THE
 10-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 30PPM (1ST NUMBER)
 30-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 20PPM (2ND NUMBER)
 60-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 10PPM (3RD NUMBER)

SOURCE STRENGTH LB/MIN	DELTA T (DEG F)														
	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10
1	100	200	300	400	500	600	800	900	1100	1300	1500	1800	2100	2400	2800
3	200	300	400	500	600	700	900	1100	1300	1500	1800	2100	2400	2800	3400
5	300	400	500	600	700	800	1000	1200	1400	1600	1900	2200	2600	3000	3600
10	400	500	600	700	800	1000	1200	1400	1700	2000	2400	2900	3300	3800	4400
15	500	600	700	800	1000	1200	1400	1700	2000	2400	2900	3500	4100	4700	5500
20	600	700	800	1000	1200	1400	1700	2000	2400	2900	3500	4100	4700	5500	6200
30	700	800	1000	1200	1400	1700	2000	2400	2900	3500	4100	4700	5500	6200	7000
40	800	1000	1200	1400	1700	2000	2400	2900	3500	4100	4700	5500	6200	7000	7800
50	900	1100	1300	1500	1800	2100	2500	3000	3600	4200	4900	5700	6500	7300	8100
75	1000	1200	1400	1600	1900	2200	2600	3100	3700	4400	5200	6000	6800	7600	8400
100	1100	1300	1500	1700	2000	2300	2700	3200	3800	4500	5300	6100	6900	7700	8500

Table F-1 (cont'd). Hydrazine TCL Table (TITAN - Emergencies).

HAZARD CORRIDOR LENGTHS IN FEET FOR THE
 10-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 30PPM (1ST NUMBER)
 30-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 20PPM (2ND NUMBER)
 60-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 10PPM (3RD NUMBER)

SOURCE STRENGTH LB/MIN	DELTA T (DEG F)														
	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10
120	1000	1500	2100	2800	3600	4600	5700	6900	8400	10000	11700	13600	15800	18100	20600
	1300	1800	2500	3400	4400	5600	7000	8500	10300	12200	14400	16800	19400	22200	25300
	1800	2600	3600	4800	6300	8000	9900	12200	14700	17400	20500	23900	27600	31700	36100
200	1300	1900	2700	3600	4700	5900	7400	9000	10900	12900	15200	17700	20500	23500	26700
	1600	2400	3300	4400	5700	7300	9100	11100	13400	15900	18700	21800	25200	28900	32900
	2300	3300	4700	6300	8200	10400	12900	15800	19000	22700	26700	31100	35900	41200	46900
400	1900	2700	3800	5100	6600	8400	10500	12800	15500	18400	21700	25300	29200	33400	38100
	2300	3200	4700	6300	8200	10400	12900	15800	19000	22700	26700	31100	35900	41200	46900
	3200	4700	6600	8900	11600	14800	18400	22500	27100	32300	38000	44300	51200	58700	66900
600	2300	3300	4700	6300	8200	10400	12900	15800	19000	22700	26700	31100	35900	41200	46900
	2800	4100	5700	7700	10000	12800	15900	19400	23400	27900	32800	38300	44200	50700	57700
	4000	5800	8100	11000	14300	18200	22600	27700	33400	39800	46800	54600	63100	72300	82300
1000	2900	4300	6000	8100	10600	13500	16800	20500	24700	29400	34600	40400	46700	53500	60900
	3600	5300	7400	10000	13000	16600	20600	25200	30400	36200	42600	49700	57400	65800	75000
	5100	7500	10600	14200	18600	23600	29400	36000	43400	51700	60800	70900	81900	93900	107000
1500	3600	5300	7400	10000	13000	16600	20600	25200	30400	36200	42600	49700	57400	65800	75000
	4400	6500	9100	12300	16000	20400	25400	31100	37500	44600	52500	61200	70700	81100	92300
	6300	9300	13000	17500	22800	29100	36200	44300	53400	63600	74900	87300	100500	115700	131700
2000	4200	6100	8600	11600	15100	19200	23900	29200	35300	42000	49400	57600	66600	76300	86900
	5100	7600	10600	14200	18600	23600	29400	36000	43400	51700	60800	70900	81900	93900	107000
	7300	10800	15100	20300	26500	33700	41900	51300	61900	73700	86800	101200	116900	134000	152600
3000	5100	7600	10600	14200	18600	23600	29400	36000	43400	51700	60800	70900	81900	93900	107000
	6300	9300	13000	17500	22800	29100	36200	44300	53400	63600	74900	87300	100900	115700	131700
	9000	13200	18500	25000	32600	41400	51600	63200	76200	90800	106900	124600	143900	165000	187900
4000	5900	8800	12200	16500	21500	27400	34100	41700	50300	59900	70500	82200	95000	108900	124000
	7300	10800	15100	20300	26500	33700	41900	51300	61900	73700	86800	101200	116900	134000	152600
	10400	15300	21500	28900	37700	48000	59800	73300	88400	105200	123800	144400	166800	191300	217800
5000	6700	9800	13700	18500	24100	30700	38200	46800	56400	67100	79100	92100	106500	122100	139000
	8200	12100	16900	22700	29700	37700	47000	57600	69400	82700	97300	113400	131100	150300	171100
	11700	17200	24100	32400	42300	53800	67100	82100	99100	117900	138900	161900	187000	214400	244200

Table F-2. Nitrogen Tetroxide TCL Table (MITAN - Operational).

HAZARD CORRIDOR LENGTHS IN FEET FOR THE
10-MINUTE SHORT-TERM PUBLIC LIMIT, IPFM

SOURCE STRENGTH LB/MIN	DELTA T (DEG F)														
	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10
1	400	600	900	1200	1500	1900	2300	2900	3400	4100	4900	5600	6500	7400	8400
3	700	1100	1500	2000	2600	3300	4100	5000	6000	7100	8400	9800	11300	13000	14700
5	1000	1400	1900	2600	3400	4300	5300	6500	7800	9300	10900	12700	14700	16800	19200
10	1300	2000	2700	3700	4800	6100	7500	9200	11100	13200	15600	18100	20900	24000	27300
15	1600	2400	3400	4500	5900	7400	9300	11300	13700	16300	19100	22300	25800	29500	33600
20	1900	2800	3900	5200	6800	8600	10700	13100	15900	18800	22200	25800	29800	34200	39000
30	2300	3400	4800	6400	8300	10600	13200	16200	19500	23200	27300	31800	36700	42100	47900
40	2700	3900	5500	7400	9700	12300	15300	18700	22600	26900	31600	36500	42600	48800	55600
50	3000	4400	6200	8300	10800	13800	17100	21000	25300	30100	35400	41300	47700	54700	62300
75	3700	5400	7600	10200	13300	16900	21100	25800	31100	37100	43600	50800	58800	67400	76700
100	4300	6300	8800	11800	15400	19600	24400	29900	36100	42900	50600	58900	68100	78100	88900
200	6100	9000	12500	16900	22000	29000	34900	42700	51500	61300	72100	84100	97100	111400	126800
300	7500	11000	15400	20700	27100	34400	42900	52500	63300	75400	88800	103500	119600	137100	156100
400	8600	12800	17900	24000	31400	39900	49700	60900	73400	87400	102900	119900	138600	158900	180900
500	9700	14300	20000	26900	35200	44700	55700	68200	82300	98000	115400	134500	155400	178200	202900
1000	13800	20400	28500	38400	50200	63800	79500	97400	117400	139800	164600	191900	221700	254200	289500
2000	19700	29100	40700	54800	71600	91100	113500	138900	167600	199500	234900	273800	316400	362800	413100
3000	24200	35800	50100	67500	88100	112100	139700	171000	206300	245600	289200	337100	389600	446700	508500
4000	28100	41400	58100	78200	102100	129900	161900	198200	239100	284700	335200	390700	451500	517700	589400
5000	31500	46500	65100	87700	114500	145700	181500	222300	268100	319200	375800	438100	506300	580500	660900

Table F-3. Nitrogen Tetroxide TCL Table (TITAN - Emergencies).

HAZARD CORRIDOR LENGTHS IN FEET FOR THE
 10-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 5PPM (1ST NUMBER)
 30-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 3PPM (2ND NUMBER)
 60-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 2PPM (3RD NUMBER)

SOURCE STRENGTH LB./MIN	DELTA T (DEG F.)														
	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10
1	200	300	400	500	700	900	1100	1300	1500	1800	2100	2500	2900	3300	3700
	300	400	500	700	900	1100	1400	1700	2000	2300	2800	3200	3700	4200	4800
	300	500	600	800	1100	1300	1700	2000	2400	2900	3400	3900	4500	5200	5900
3	400	500	700	900	1200	1500	1800	2200	2700	3200	3700	4300	5000	5700	6500
	400	600	900	1200	1500	1900	2300	2900	3400	4100	4800	5600	6500	7400	8400
	500	800	1100	1400	1800	2300	2900	3500	4200	5000	5900	6900	7900	9100	10400
5	400	500	900	1200	1500	1900	2300	2900	3400	4100	4800	5600	6500	7400	8400
	600	800	1100	1500	1900	2400	3000	3700	4500	5300	6200	7300	8400	9600	10900
	700	1000	1400	1800	2400	3000	3700	4600	5500	6500	7700	8900	10300	11800	13400
10	600	900	1200	1600	2100	2700	3300	4100	4900	5800	6800	8000	9200	10500	12000
	800	1100	1600	2100	2700	3500	4300	5300	6300	7500	8900	10300	11900	13700	15600
	1000	1400	1900	2600	3400	4300	5300	6500	7800	9300	10900	12700	14700	16800	19200
15	700	1100	1500	2000	2600	3300	4100	5000	6000	7100	8400	9800	11300	13000	14700
	1000	1400	1900	2600	3400	4300	5300	6500	7800	9300	10900	12700	14700	16800	19200
	1200	1700	2400	3200	4100	5200	6500	8000	9600	11400	13400	15600	18100	20700	23600
20	900	1200	1700	2300	3000	3800	4700	5800	7000	8300	9700	11300	13100	15000	17100
	1100	1600	2200	3000	3900	4900	6100	7500	9000	10700	12600	14700	17000	19500	22200
	1300	2000	2700	3700	4800	6100	7500	9200	11100	13200	15600	18100	20900	24000	27300
30	1000	1500	2100	2800	3700	4700	5800	7100	8600	10200	12000	14000	16100	18500	21000
	1300	2000	2700	3700	4800	6100	7500	9200	11100	13200	15600	18100	20900	24000	27300
	1600	2400	3400	4500	5900	7400	9300	11300	13700	16300	19100	22300	25800	29500	33600
40	1200	1800	2400	3300	4300	5400	6700	8200	9900	11800	13900	16200	18700	21400	24400
	1600	2300	3200	4200	5500	7000	8700	10700	12900	15300	18000	21000	24300	27800	31600
	1900	2800	3900	5200	6800	8600	10700	13100	15800	18800	22200	25800	29800	34200	39000
50	1300	2000	2700	3700	4800	6100	7500	9200	11100	13200	15600	18100	20900	24000	27300
	1700	2500	3500	4700	6200	7900	9800	12000	14400	17200	20200	23500	27200	31200	35500
	2100	3100	4300	5600	7600	9700	12600	14700	17700	21100	24900	29000	33500	38400	43700
75	1600	2400	3400	4500	5900	7400	9300	11300	13700	16300	19100	22300	25800	29500	33600
	2100	3100	4300	5800	7600	9700	12000	14700	17700	21100	24900	29000	33500	38400	43700
	2600	3800	5300	7200	9300	11900	14800	18100	21800	26000	30600	35600	41200	47200	53800
100	1900	2800	3900	5200	6800	8600	10700	13100	15800	18800	22200	25800	29800	34200	39000
	2500	3600	5000	6800	8800	11200	13900	17000	20600	24500	28800	33600	38800	44500	50600
	3000	4400	6200	8300	10900	13800	17100	21000	25300	30100	35400	41300	47700	54700	62300

Table F-3 (cont'd). Nitrogen Tetroxide TCL Table (TITAN - Emergencies).

HAZARD CORRIDOR LENGTHS IN FEET FOR THE
 10-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 5PPM (1ST NUMBER)
 30-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 3PPM (2ND NUMBER)
 60-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 2PPM (3RD NUMBER)

SOURCE STRENGTH LB/MIN	DELTA T (DEG F)														
	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10
120	2100	3000	4300	5700	7400	9500	11800	14400	17400	20700	24300	28400	32800	37600	42800
	2700	3900	5500	7400	9700	12300	15300	18700	22600	26900	31600	36800	42600	48800	55600
	3300	4800	6800	9100	11900	15100	18800	23000	27800	33100	38900	45400	52400	60100	68400
200	2700	3900	5500	7400	9700	12300	15300	18700	22600	26900	31600	36800	42600	48800	55600
	3500	5100	7200	9600	12500	15700	19900	24300	29300	34900	41100	47900	55300	63400	72200
	4300	6300	8800	11800	15400	19600	24400	29900	36100	42900	50600	58900	68100	78100	88900
400	3800	5600	7800	10600	13800	17500	21800	26700	32200	38300	45100	52600	60700	69600	79300
	4900	7300	10200	13700	17900	22700	28300	34700	41800	49800	58600	68300	78900	90500	103000
	6100	9000	12500	16900	22000	28000	34300	42700	51500	61300	72100	84100	97100	111400	126800
600	4700	6900	9500	13000	16900	21500	26800	32800	39600	47200	55500	64700	74800	85700	97600
	6100	9000	12500	16900	22000	28000	34900	42700	51500	61300	72100	84100	97100	111400	126800
	7500	11000	15400	20700	27100	34400	42900	52500	63300	75400	88800	103500	119600	137100	156100
1000	6100	9000	12500	16900	22000	28000	34900	42700	51500	61300	72100	84100	97100	111400	126800
	7900	11600	16300	21900	28600	36300	45300	55400	66900	79600	93700	109200	126200	144700	164800
	9700	14300	20000	26900	35200	44700	55700	68200	82300	98000	115400	134500	155400	178200	202900
1500	7500	11000	15400	20700	27100	34400	42900	52500	63300	75400	88800	103500	119600	137100	156100
	9700	14300	20000	26900	35200	44700	55700	68200	82300	98000	115400	134500	155400	178200	202900
	11900	17600	24600	33200	43300	55100	68600	84000	101300	120600	142000	165600	191300	219400	249800
2000	8600	12800	17900	24000	31400	39900	49700	60900	73400	87400	102900	119900	138600	158900	180900
	11200	16600	23200	31200	40700	51600	64600	79100	95400	113600	133700	155900	180100	206500	235100
	13800	20400	28500	38400	50200	63800	79500	97400	117400	139800	164600	191900	221700	254200	289500
3000	10600	15700	22000	29600	38600	49100	61200	74900	90400	107600	126700	147700	170600	195600	222700
	13800	20400	28500	38400	50200	63800	79500	97400	117400	139800	164600	191900	221700	254200	289500
	17000	25100	35100	47300	61700	78600	97900	119900	144600	172100	202700	236300	273000	313000	356400
4000	12300	18200	25500	34300	44700	56900	70900	86800	104700	124700	146800	171100	197800	226700	258200
	16000	23600	33100	44500	58100	74000	92200	112800	136100	162100	190800	222400	257000	294700	335500
	19700	29100	40700	54800	71600	91100	113500	138900	167600	199500	234900	273800	316400	362800	413100
5000	13800	20400	28500	38400	50200	63800	79500	97400	117400	139800	164600	191900	221700	254200	289500
	17900	26500	37100	49900	65200	82900	103300	126500	152600	181700	213900	249400	288200	330400	376200
	22100	32600	45600	61500	80200	102100	127200	155800	187900	223700	263400	307000	354800	406800	463100

Table F-4. Unsymmetrical Dimethylhydrazine (UDMH) TCL Table (TITAN - Operational).

HAZARD CORRIDOR LENGTHS IN FEET FOR THE
10-MINUTE SHORT-TERM PUBLIC LIMIT, 50 PPM

SOURCE STRENGTH LB/MIN	DELTA T (DEG F)														
	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10
1	100	100	100	200	200	300	300	400	400	500	600	700	800	900	1000
3	100	200	200	300	300	400	500	600	700	900	1000	1200	1400	1600	1800
5	200	200	300	300	400	500	700	800	1000	1100	1300	1500	1800	2000	2300
10	200	300	400	500	600	800	900	1100	1300	1600	1900	2200	2500	2900	3200
15	200	300	400	600	700	900	1100	1400	1600	1900	2300	2700	3100	3500	4000
20	300	400	500	700	800	1100	1300	1600	1900	2300	2600	3100	3500	4100	4600
30	300	400	600	800	1000	1300	1600	1900	2300	2800	3200	3800	4300	5000	5700
40	400	500	700	900	1200	1500	1800	2200	2700	3200	3700	4400	5000	5800	6500
50	400	600	800	1000	1300	1700	2100	2500	3000	3600	4200	4900	5600	6500	7300
75	500	700	900	1200	1600	2000	2500	3100	3700	4400	5200	6000	6900	7900	9000
100	500	800	1100	1400	1900	2300	2900	3600	4300	5100	6000	7000	8000	9200	10500
200	800	1100	1500	2000	2600	3300	4100	5000	6100	7200	8500	9900	11400	13100	14900
300	900	1300	1900	2500	3200	4100	5100	6200	7500	8900	10400	12200	14100	16100	18300
400	1100	1500	2100	2900	3700	4700	5700	7200	8600	10300	12100	14100	16300	18700	21200
500	1200	1700	2400	3200	4200	5300	6500	8000	9700	11500	13600	15800	18300	20900	23800
1000	1700	2400	3400	4500	5900	7500	9400	11500	13800	16400	19300	22500	26000	29800	34000
2000	2400	3400	4800	6500	8400	10700	13300	16300	19700	23400	27600	32100	37100	42600	48500
3000	2900	4200	5900	8000	10400	13200	16400	20100	24200	28800	33900	39600	45700	52400	59600
4000	3300	4900	6800	9200	12000	15300	19000	23300	28100	33400	39300	45800	53000	60700	69100
5000	3700	5500	7700	10300	13500	17100	21300	26100	31500	37500	44100	51400	59400	68100	77500

Table P-5. Unsymmetrical Dimethylhydrazine (UDMH) TCL Table (TITAN - Emergencies).

HAZARD CORRIDOR LENGTHS IN FEET FOR THE
 10-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 100PPM (1ST NUMBER)
 30-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 50PPM (2ND NUMBER)
 60-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 30PPM (3RD NUMBER)

SOURCE STRENGTH LB/MIN	DELTA T (DEG F)														
	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10
1	100	100	100	100	200	200	200	300	300	400	400	500	600	700	700
3	100	200	200	300	300	400	400	500	500	600	700	700	800	800	900
5	100	200	200	300	300	400	500	500	600	600	700	700	800	800	900
10	200	300	300	400	400	500	500	600	600	700	700	800	800	900	900
15	200	300	300	400	400	500	500	600	600	700	700	800	800	900	900
20	300	400	400	500	500	600	600	700	700	800	800	900	900	900	900
30	400	500	500	600	600	700	700	800	800	900	900	900	900	900	900
40	500	600	600	700	700	800	800	900	900	900	900	900	900	900	900
50	600	700	700	800	800	900	900	900	900	900	900	900	900	900	900
75	800	900	900	1000	1000	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100
100	1000	1100	1100	1200	1200	1300	1300	1300	1300	1300	1300	1300	1300	1300	1300

Table F-5 (cont'd). Unsymmetrical Dimethylhydrazine (UDMH) TCL Table (TITAN - Emergencies).

HAZARD CORRIDOR LENGTHS IN FEET FOR THE
 10-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 100PPM (1ST NUMBER)
 30-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 50PPM (2ND NUMBER)
 60-MINUTE SHORT-TERM PUBLIC EMERGENCY LIMIT, 30PPM (3RD NUMBER)

SOURCE STRENGTH LB/MIN	DELTA T (DEG F)														
	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10
120	400	600	800	1100	1400	1800	2200	2700	3300	3900	4600	5400	6200	7100	8100
	600	900	1200	1600	2000	2600	3200	3900	4700	5600	6500	7600	8800	10100	11500
	800	1100	1500	2000	2600	3300	4100	5000	6100	7200	8500	9900	11400	13100	14900
200	500	800	1100	1400	1900	2300	2900	3600	4300	5100	6000	7000	8000	9200	10500
	800	1100	1500	2000	2600	3300	4100	5000	6100	7200	8500	9900	11400	13100	14900
	1000	1400	2000	2600	3400	4300	5400	6500	7900	9400	11000	12800	14800	17000	19400
400	800	1100	1500	2000	2600	3300	4100	5000	6100	7200	8500	9900	11400	13100	14900
	1100	1500	2100	2900	3700	4700	5900	7200	8600	10300	12100	14100	16300	18700	21200
	1400	2000	2800	3700	4800	6100	7600	9300	11200	13400	15700	18300	21200	24200	27600
600	900	1300	1900	2500	3200	4100	5100	6200	7500	8900	10400	12200	14100	16100	18300
	1300	1900	2600	3500	4600	5800	7200	8800	10600	12700	14900	17400	20000	23000	26100
	1700	2400	3400	4500	5900	7500	9400	11500	13800	16400	19300	22500	26000	29800	34000
1000	1200	1700	2400	3200	4200	5300	6600	8000	9700	11500	13600	15800	18300	20900	23800
	1700	2400	3400	4500	5900	7500	9400	11500	13800	16400	19300	22500	26000	29800	34000
	2100	3100	4400	5900	7700	9800	12200	14900	17900	21300	25100	29300	33800	38500	44100
1500	1400	2100	2900	3900	5100	6500	8100	9900	11900	14200	16700	19400	22500	25800	29300
	2000	3000	4200	5600	7300	9300	11500	14100	17000	20200	23800	27700	32000	36700	41800
	2600	3900	5400	7200	9400	12000	15000	18300	22100	26300	30900	36000	41600	47700	54300
2000	1700	2400	3400	4500	5900	7500	9400	11500	13800	16400	19300	22500	26000	29800	34000
	2400	3400	4800	6500	8400	10700	13300	16300	19700	23400	27600	32100	37100	42600	48500
	3000	4500	6200	8400	10900	13900	17300	21200	25600	30400	35800	41700	48200	55300	63000
3000	2000	3000	4200	5600	7300	9300	11500	14100	17000	20200	23800	27700	32000	36700	41800
	2900	4200	5900	8000	10400	13200	16400	20100	24200	28800	33900	39600	45700	52400	59600
	3700	5500	7700	10300	13500	17100	21300	26100	31500	37500	44100	51400	59400	68100	77500
4000	2400	3400	4800	6500	8400	10700	13300	16300	19700	23400	27600	32100	37100	42600	48500
	3300	4900	6800	9200	12000	15300	19000	23300	28100	33400	39300	45800	53000	60700	69100
	4300	6400	8900	12000	15600	19800	24700	30200	36500	43400	51100	59600	68800	78900	89800
5000	2600	3900	5400	7200	9400	12000	15000	18300	22100	26300	30900	36000	41600	47700	54300
	3700	5500	7700	10300	13500	17100	21300	26100	31500	37500	44100	51400	59400	68100	77500
	4800	7100	10000	13400	17500	22200	27700	33900	40900	48700	57300	66800	77100	88500	100700

Appendix G

TABLE OF THE ELEMENTS

<u>ELEMENT</u>	<u>SYMBOL</u>	<u>ATOMIC NUMBER</u>	<u>ATOMIC WEIGHT</u> (C = 12)
actinium	Ac	89	--
aluminum	Al	13	26.9815
americium	Am	95	--
antimony	Sb	51	121.75
argon	Ar	18	39.948
arsenic	As	33	74.9216
astatine	At	85	--
barium	Ba	56	137.34
berkelium	Bk	97	--
beryllium	Be	4	9.01218
bismuth	Bi	83	208.9806
boron	B	5	10.81
bromine	Br	35	79.904
cadmium	Cd	48	112.40
calcium	Ca	20	40.08
californium	Cf	98	--
carbon	C	6	12.011
cerium	Ce	58	140.12
cesium	Cs	55	135.9055
chlorine	Cl	17	35.453
chromium	Cr	24	51.996
cobalt	Co	27	58.9332
columbium	Cb	(see niobium)	--
copper	Cu	29	63.546
curium	Cm	96	--
dysprosium	Dy	66	162.50
einsteinium	Es	99	--
erbium	Er	68	167.26
europium	Eu	63	151.96
fermium	Fm	100	--
fluorine	F	9	18.9984
francium	Fr	87	--
gadolinium	Gd	64	157.25
gallium	Ga	31	69.72
germanium	Ge	32	72.59
gold	Au	79	196.9665
hafnium	Hf	72	178.49
helium	He	2	4.00260
holmium	Ho	67	164.9303
hydrogen	H	1	1.0080

<u>ELEMENT</u>	<u>SYMBOL</u>	<u>ATOMIC NUMBER</u>	<u>ATOMIC WEIGHT</u> (C = 12)
indium	In	49	114.82
iodine	I	53	126.9045
iridium	Ir	77	192.22
iron	Fe	26	55.847
krypton	Kr	36	83.80
lanthanum	La	57	138.9055
lawrencium	Lr	103	--
lead	Pb	82	207.2
lithium	Li	3	6.941
lutetium	Lu	71	174.97
magnesium	Mg	12	24.305
manganese	Mn	25	54.9380
mendelevium	Md	101	--
mercury	Hg	80	200.59
molybdenum	Mo	42	95.94
neodymium	Nd	60	144.24
neon	Ne	10	20.179
neptunium	Np	93	237.0482
nickel	Ni	28	58.71
niobium	Nb	41	92.9064
nitrogen	N	7	14.0067
nobelium	No	102	--
osmium	Os	76	190.2
oxygen	O	8	15.9994
palladium	Pd	46	106.4
phosphorus	P	15	30.9738
platinum	Pt	78	195.09
plutonium	Pu	94	--
polonium	Po	84	--
potassium	K	19	39.102
praseodymium	Pr	59	140.9077
promethium	Pm	61	--
protactinium	Pa	91	231.0359
radium	Ra	88	226.0254
radon	Rn	86	--
rhenum	Rc	75	186.2
rhodium	Rh	45	102.9055
rubidium	Rb	37	85.4678
ruthenium	Ru	44	101.07
samarium	Sm	62	150.4
scandium	Sc	21	44.9559
selenium	Se	34	78.96
silicon	Si	14	28.086

<u>ELEMENT</u>	<u>SYMBOL</u>	<u>ATOMIC NUMBER</u>	<u>ATOMIC WEIGHT</u> <u>(C = 12)</u>
silver	Ag	47	107.868
sodium	Na	11	22.9898
strontium	Sr	38	87.62
sulfur	S	16	32.06
tantalum	Ta	73	180.9479
technetium	Tc	43	98.9062
tellurium	Te	52	127.60
terbium	Tb	65	158.9254
thallium	Tl	81	204.37
thorium	Th	90	232.0381
thulium	Tm	69	168.9342
tin	Sn	50	118.69
titanium	Ti	22	47.90
tungsten	W	74	183.85
uranium	U	92	238.029
vanadium	V	23	50.9414
wolfram	W	(see tungsten)	--
xenon	Xe	54	131.30
ytterbium	Yb	70	173.04
yttrium	Y	39	88.9059
zinc	Zn	30	65.37
zirconium	Zr	40	91.22

TERMS

Delta-T. Temperature difference between heights of 54 and 6 feet.

Emergency Exposure Limit (EEL). A short-term exposure limit which is used in an accidental release of a toxic chemical. These releases should be rare. The workers are knowledgeable of possible exposure and are subjected to periodical medical examination. These limits were established by a panel of experts appointed by the National Academy of Sciences - National Research Council, Committee on Toxicology. Concentrations are such that reversible toxic effects and discomfort, short of actual incapacitation, may well occur.

Exposure Limit. An atmospheric concentration of a toxic chemical that must not be exceeded. Exposure limits are established for the industrial community and the general public. Some of these include the Short-Term Public Emergency Limit (SPEL), Emergency Exposure Limit (EEL), and Short-Term Public Limit (STPL). Exposure limits may be expressed in Parts Per Million (PPM) by volume or in mass per unit volume (e.g., milligrams per cubic meter). Since the techniques contained in this report call for exposure limits in PPM, the conversion factors listed below may be used to convert to PPM from mass per unit volume units:

To convert to PPM (Vol) from

mg/m³, multiply by 24.3/GMW or from

µg/m³, multiply by 2.43 x 10⁻²/GMW

where GMW is the gram molecular weight of the toxic chemical for which the exposure limit applies.

Hazard Corridors. The term "hazard" is frequently used interchangeably with the term "toxic" when reference is made to a corridor to be evacuated as the result of a release into the atmosphere of a toxic and, occasionally, explosive chemical. A hazard corridor considers both toxic and explosive risks to the public and will be the larger corridor determined from the appropriate considerations. If the corridor determined from explosive considerations is contained within that determined from toxic considerations, the hazard corridor will be identical to the toxic corridor. Weather personnel will be involved only with calculating "toxic" corridors which may or may not be determined to be "hazard" corridors by appropriate disaster response personnel.

Ocean Breeze and Dry Gulch Equation. This is an equation developed at the Air Force Cambridge Research Laboratories (now the Air Force Geophysics Laboratory) to determine downwind peak concentration of airborne contaminants from a continuous point source. This empirically derived equation was developed from data collected during extensive diffusion experiments with tracer releases simulating ground-level continuous point sources. Using independent data, the normalized peak concentrations obtained from this equation have been found to be accurate within a factor of two, 65 percent of the time and within a factor of four, 94 percent of the time. The equation is

$$C_p/Q = 1.75 \times 10^{-4} X^{-1.95} (\Delta T + 10)^{4.92}$$

This report is concerned with downwind distance, X, at which a predetermined concentration, C_p, will occur for a known source strength, Q, and temperature difference, delta-T (ΔT). The equation above was inverted and solved for the downwind distance X. In the process, appropriate changes were made to the coefficient to convert from metric units to English units and a factor was added to convert C_p/Q from units of seconds per cubic meter to units of PPM per lb/min. The converted equation, which was used to generate the Toxic Corridor Length Tables in this report is

$$X = P \left[3.28 \left(\frac{29.75}{GMW} \right)^{0.513} \left(\frac{C_p}{Q} \right)^{-0.513} (\Delta T + 10)^{2.53} \right]$$

where X = downwind distance in feet. As used here, this distance defines a toxic corridor length.

P = a probability factor used to determine the probability that a specified concentration is not exceeded outside the corridor. Calculations in this report assume a 90-percent probability; therefore, P is equal to 1.63. Probability factors corresponding to other probabilities can be found in Table 35.

GMW = gram molecular weight of the toxic chemical.

C_p = peak concentration in parts per million by volume (PPM) at a height of approximately 5 feet above the ground at a given downwind travel distance, X, in feet. By definition, this peak concentration occurs on the axis of the diffusing cloud. Toxic corridor lengths are calculated by using a specified exposure limit for C_p in the above equation.

Q = source strength in lb/min.

ΔT = the temperature in °F at 54 feet minus the temperature at 6 feet (NOTE: A negative ΔT means a decrease of temperature with height and a positive ΔT means an increase with height.)

Operational Toxic Corridor. (This term was established by the Strategic Air Command in connection with TITAN missile operations.) If an actual propellant spill or mishap occurs, an operational toxic (or "hazard" as it's sometimes called) corridor will be required. The calculated corridor will be periodically updated as meteorological and/or source strength information becomes more clearly defined.

Propellant Emission Corridor. (This term was established by the Strategic Air Command in connection with TITAN missile operations.) This corridor, which was formerly termed the "Intentional Released Corridor," will be established when planned emissions of propellants are to occur (e.g., tank venting or purging operations). As this is a scheduled occurrence, a determination must be made as to whether the planned task can be performed without unacceptable exposure to the general public.

Potential Toxic Corridor. (This term was established by the Strategic Air Command in connection with TITAN missile operations.) This corridor, which is sometimes referred to as a "Potential Toxic Corridor," will be calculated when propellants are in a nonstatic mode where no release of propellant to the environment is planned. This corridor should be updated as meteorological and/or potential source strengths change during an operation.

Public Emergency Limit (PEL). See Short-Term Public Emergency Limit (SPEL). The Committee on Toxicology (1979) renamed PELs as SPELs to avoid possible confusion with the OSHA term "permissible exposure limit."

Short-Term Public Emergency Limit (SPEL). This exposure limit will normally be used in calculating Potential and Operational Toxic Corridors at TITAN missile sites. It is a short-term exposure limit which is used in an accidental release of a toxic chemical involving the general public. These releases are expected to be rare events. A SPEL assumes that some temporary discomfort may accrue to the public, but that any effect resulting from the exposure is reversible and without residual damage. These limits were established by a panel of experts appointed by the National Academy of Sciences - National Research Council, Committee on Toxicology. Consultation with members of this panel led to the selection of the exposure limits

used in this report. The Committee on Toxicology recently renamed the "PEL" to "SPEL" for "Short-Term Public Emergency Limit." This was done to prevent confusion with the OSHA "Permissible Exposure Limit" which has a different meaning and intended use. In some cases where the Committee on Toxicology has not established a SPEL but has established an Emergency Exposure Limit (EEL), this report has conservatively estimated the SPEL as a fraction of the EEL. For example, a 30-minute SPEL may have been estimated as 10 ppm or 1/5 of 50 ppm, the 30-minute EEL for that chemical.

Short-Term Public Limit (STPL). This is an exposure limit that will normally be used to compute Propellant Emission Corridors at TITAN missile sites. Several tables for 10-minute STPLs are published in Appendix F primarily for use by weather personnel supporting SAC TITAN missile sites.

Solar Elevation. The angle between the sun and the horizon.

Source Strength (SS or Q). The rate in mass per unit time, expressed in this report in pounds per minute, at which a toxic chemical is released into the atmosphere. The source strength of a liquid spill of toxic chemical is determined by its rate of evaporation.

Temperature Difference (delta-T). The temperature change in the vertical. Delta-T is used to estimate the stability of the lower atmosphere and, thus, the amount of vertical mixing. Table B-1 is based on delta-T values calculated by subtracting the temperature ($^{\circ}\text{F}$) at 6 feet above ground from the temperature at 54 feet above ground.

Toxic Chemical. The chemical which could constitute a health hazard, if it is released into the atmosphere.

Toxic Corridor. The area within which the forecast concentration of a toxic chemical equals or exceeds a specified exposure limit. Toxic corridors are expressed in terms of length (X) in feet and width (W) in degrees of azimuth.

Wetted Area. Surface area covered by a spilled liquid chemical.

Wind Variability (R). As used in this report, R is the difference in degrees between the third largest fluctuation on each side of the mean wind direction when a 10-minute wind direction trace is used. As an approximation to this when only a 2-minute observation of a wind direction indicator is available, R is the difference in degrees between the largest fluctuation on each side of the mean wind direction. R is an index of the lateral diffusion of a toxic chemical in the atmosphere.


ABBREVIATIONS AND SYMBOLS

A	Area
AFGL	Air Force Geophysics Laboratory
AWS	Air Weather Service
BEE	Bioenvironmental Engineer
C _p	Peak concentration of an airborne toxic chemical - See Ocean Breeze and Dry Gulch equation in the Glossary of Terms for more information on this term.
CF	Chemical Factor
D	Mean wind direction in degrees of azimuth
Delta T	Temperature differential between 54- and 6-foot heights
DF	Diffusion Factor
ΔT	Same as Delta-T
DRF	Disaster Response Force
E	Error (see Figure D-1)
EEL	Emergency Exposure Limit
GMW	Gram Molecular Weight
in Hg	Inches of Mercury
mg	Milligram (10 ⁻³ gram)
μg	Microgram (10 ⁻⁶ gram)
mb	Millibar
P	Probability factor (see Table 35)
PEL	Public Emergency Limit; replaced by SPEL
PPAR	Percent Parameter. This is the same as the probability factor (P). (See Table 35)
PPM	Parts per million by volume
psi	Pounds per square inch
P _v	Vapor Pressure
Q	Source strength in mass per unit time
R	Wind direction variability in degrees
SPEL	Short-Term Public Emergency Limit; replaced PEL
SS	Source strength in mass per unit time
STPL	Short-Term Public Limit
T _p	Toxic Chemical pool temperature in °C
TC	Toxic Corridor
TCL	Toxic Corridor Length
V	Wind Velocity
W	Toxic Corridor Width in degrees of azimuth
X	Downwind distance in feet
Z	Source strength correction factor for evaporative sources (See Appendix C)

TOXIC CORRIDOR WORKSHEET

Name of Chemical _____

1. Source strength _____ lbs/min (from environmental health service, disaster response force, or estimated)
2. 54-6 foot delta-T _____ °F (from instrument or table)
3. Toxic Corridor length _____ feet (from toxic corridor table)
4. Mean surface wind _____; wind variability (R) _____ degrees (from wind trace, instrument dial, or estimated)
5. Corridor width (W) _____ degrees (W = 1.5R)
6. Toxic corridor plot
7. Surface wind trend forecast no change/change to °/ kt)

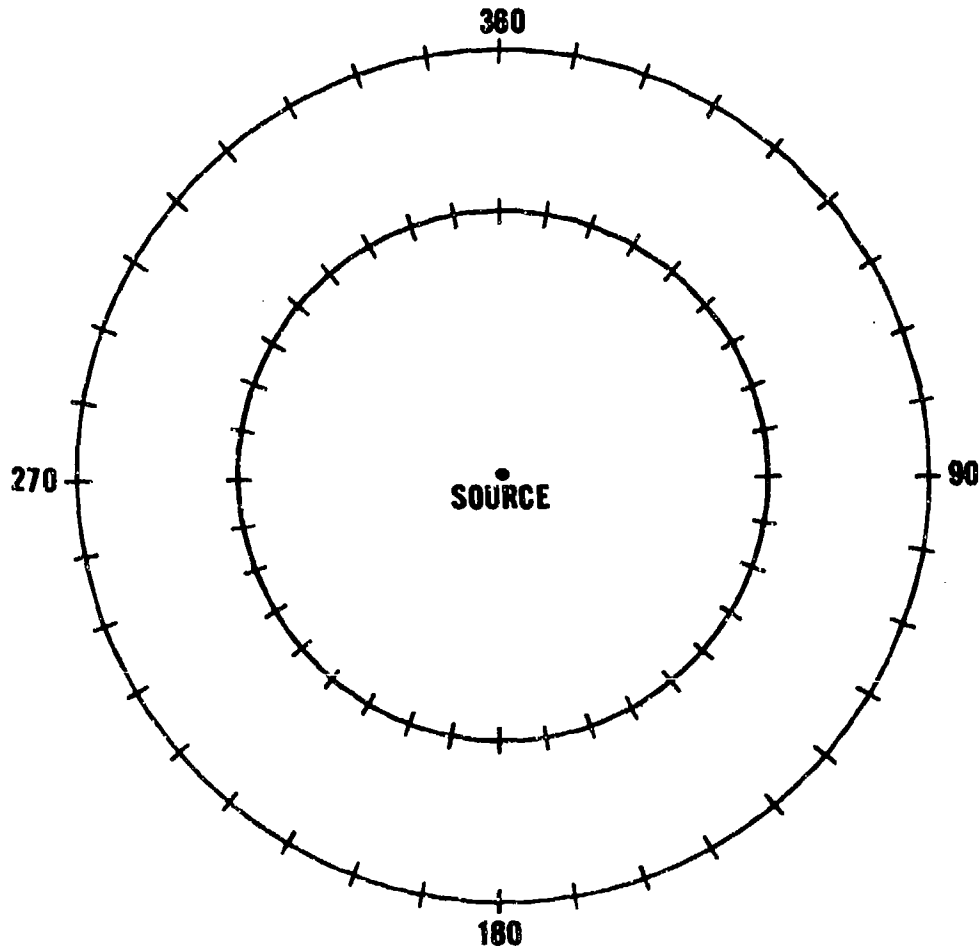

DISTRIBUTION

AWS/CS, Scott AFB, IL 62225-5008	1
AWS/DN, Scott AFB, IL 62225-5008	1
AWS/DO, Scott AFB, IL 62225-5008	1
OL A, HQ AWS, Buckley ANG Base, Aurora, CO 80011-9599	1
OL-B, HQ AWS, Langley AFB, VA 23665-5533	1
AFOTEC/WE, Kirtland AFB, NM 87117-7001	1
CACDA, OL-E, HQ AWS, ATZL-CAW, Ft Leavenworth, KS 66027-5300	1
SD/CWDA, PO Box 92960, Los Angeles AFS, Los Angeles, CA 90009-2960	1
OL-H, HQ AWS (ATSI-CD-CS-SWO), Ft Huachuca, AZ 85613-7000	1
OL-I, HQ AWS (ATWE), Ft Monroe, VA 23651-5051	1
OL-K, HQ AWS, 1313 Halley Circle, Norman, OK 73069-8493	1
OL-L, HQ AWS, Keesler AFB, MS 39534-5000	1
SMALC-ALC/MM-AWS McClellan AFB, CA 95652-5609	1
Det 1, HQ AWS, Pentagon, Washington, DC 20330-6560	3
Det 2, HQ AWS, Pentagon, Washington, DC 20330-5054	2
CSTC/WE, PO Box 3430, Onizuka AFB, CA 94088-3430	1
Det 8, HQ AWS, PO Box 4239, N Las Vegas, NV 89030	1
Det 9, HQ AWS, PO Box 12297, Las Vegas, NV 89112-0297	1
1WW/DN, Hickam AFB, HI 96853-5000	3
20WS/DON, APO San Francisco 96328-5000	1
30WS/DON, APO San Francisco 96301-0420	1
2WW/DN, APO New York 09094-5000	3
7WS/DON, APO New York 09403-5000	3
28WS/DON, APO New York 09127-5000	1
31WS/DON, APO New York 09136-5000	1
3WW/DN, Offutt AFB, NE 68113-5000	3
9WS/DON, March AFB, CA 92518-5000	1
11WS/DON, Elmendorf AFB, AK 99506-5000	1
24WS/DON, Randolph AFB, TX 78150-5000	1
26WS/DON, Barksdale AFB, LA 71110-5002	1
4WW/DN, Peterson AFB, CO 80914-5000	3
2WS/DON, Andrews AFB, MD 20334-5000	19
5WW/DN, Langley AFB, VA 23665-5000	3
1WS/DON MacDill AFB, FL 33608-5000	1
3WS/DON, Shaw AFB, SC 29152-5000	1
5WS/DON, Ft McPherson, GA 30330-5000	1
25WS/DON, Bergstrom AFB, TX 78743-5000	1
AFGWC/SDSL, Offutt AFB, NE 68113-5000	2
USAFETAC, Scott AFB, IL 62225-5008	3
7WW/DN, Scott AFB, IL 62225-5008	3
6WS/DON Hurlburt Field, FL 32544-5000	1
15WS/DON, McGuire AFB, NJ 08641-5002	1
17WS/DON, Travis AFB, CA 94535-5000	1
3350 TECH TG/TTGU-W, Stop 62, Chanute AFB, IL 61868-5000	2
AFIT/CIR, Wright-Patterson AFB, OH 45433-6583	1
AFCSA/SAGW, Washington, DC 20330-5000	1
NAVOCEANCOMFAC, NSTL, Bay St Louis, Stennis Space Ctr, MS 39529-5002	2
COMNAVOCEAN, NSTL, Bay St Louis, MS 39529-5000	2
NAVOCEANO, Code 9220 (Tony Ortolano), NSTL, Bay St Louis, MS 39529-5001	1
NAVOCEANO, Code 4601 (Ms Loomis), NSTL Bay St Louis, MS 39529-5001	1

NEPRF, Monterey, CA 93943-5006	1
Naval Research Laboratory, Cox' 4323, Washington, DC 20375	1
Naval Postgraduate School, Chmn, Dept of Meteorology, Code 63, Monterey, CA 93943-5000.....	1
Federal Coordinator for Meteorology, Suite 300, 11426 Rockville Pike, Rockville, MD 20852.....	1
AFGL Library, Attn: SULLR, Stop 29, Hanscom AFB, MA 01731-5000.....	1
Atmospheric Sciences Laboratory, Attn: SLCAS-AT-AB, Aberdeen Proving Grounds, MD 21005-5001	1
Atmospheric Sciences Laboratory, White Sands Missile Range, NM 88002-5501	1
U.S. Army Missile Command, ATTN: AMSMI-RD-TE-T, Redstone Arsenal, AL 35898-5250	1
Technical Library, Dugway Proving Ground, Dugway, UT 84022-5000	1
NCDC Library (D542X2), Federal Building, Asheville, NC 28801-2723.....	1
DTIC-FDAC, Cameron Station, Alexandria, VA 22304-6145	2
ANG Weather Flights (through AWS/CSE).....	40
JSOC/Weather, P.O. Box 70239, Fort Bragg, NC 28307-5000	1
75th Ranger Btn (Attn: Lt David Musick), Ft Benning GA 31905-5000.....	1
HQ 5th U.S. Army, AFKB-OP (SWO), Ft Sam Houston, TX 78234-7000.....	1
AUL/LSE, Maxwell AFB, AL 36112-5564	1
AWSTL, Scott AFB, IL 62225-5438	150